

## FL IF 2TX VS-RJ-F


Order No.: 2832344

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2832344>

Media module with two twisted-pair ports for the modular managed switch system, output towards the front

### Ethernet

#### Commercial data

GTIN (EAN)	 4 017918 929114
sales group	K000
Pack	1 pcs.
Customs tariff	85176200
Catalog page information	Page 189 (AX-2009)

#### Product notes

WEEE/RoHS-compliant since:  
05/21/2008



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

#### Technical data

##### Interfaces

Interface	Ethernet
No. of ports	2
Type of connection	RJ45 female connector
Transmission physics	Ethernet in RJ45 twisted pair

Transmission speed	10/100 MBit/s (connection direction forwards)
Transmission length	100 m (per segment)
Transmission speed	10/100 MBit/s (connection direction forwards)
Transmission length	100 m (per segment)

**Function**

Basic functions	Media module for modular managed switch
-----------------	---

**Supply voltage**

Supply voltage	(via head station)
Typical current consumption	10 mA

**Conformity with EMC directives**

Developed in acc. with standard	IEC 61000-6.2
Test standard	IEC 61000-4-2 (ESD)
Test result	Criterion B
Test standard	IEC 61000-4-3 (immunity to radiated interference)
Test result	Criterion A
Test standard	IEC 61000-4-4 (burst)
Test result	Criterion A
Test standard	IEC 61000-4-5 (surge)
Test result	Criterion A
Test standard	IEC 61000-4-6 (immunity to conducted interference)
Test result	Criterion A
Test standard	IEC 61000-4-8 (immunity to magnetic fields)
Test result	Criterion A
Test standard	EN 55022 (emitted interference)
Test result	Criterion A

**Mechanical tests**

Type of test	Shock test in acc. with IEC 60068-2-27
Test result	Operation: 25 g, 11 ms duration, semi-sinusoidal shock impulse
Type of test	Shock test in acc. with IEC 60068-2-27
Test result	Storage/Transport: 50 g, 11 ms duration, semi-sinusoidal shock impulse
Type of test	Vibration resistance in acc. with IEC 60068-2-6
Test result	Operation/Storage/Transport: 5 g, 150 Hz, Criterion 3
Type of test	Free fall in acc. with IEC 60068-2-32

Test result	1 m
Inflammability class acc. to UL 94	V0

**General data**

Weight	70 g
Width	31 mm
Height	75.7 mm
Depth	75.5 mm
Degree of protection	IP20
Ambient temperature (operation)	-20 °C ... 55 °C (no condensation)
Ambient temperature (storage/transport)	-20 °C ... 80 °C
Permissible humidity (operation)	10 % ... 95 % (no condensation)
Permissible humidity (storage/transport)	10 % ... 95 % (no condensation)
Housing material	PA 6.6
Noise emission	EN 61000-6-3/-4
Noise immunity	EN 61000-6-2:2005

**Certificates / Approvals**



Certification	ABS, BV, CUL, DNV, GL, LR, UL
Certification Ex:	CUL-EX LIS, UL-EX LIS

**Accessories**

Item	Designation	Description
<b>Cable/conductor</b>		
2832250	FL CAT5 PATCH 0,3	Patch cable, CAT5, assembled, 0.3 m
2832263	FL CAT5 PATCH 0,5	Patch cable, CAT5, assembled, 0.5 m
2832276	FL CAT5 PATCH 1,0	Patch cable, CAT5, assembled, 1.0 m
2832221	FL CAT5 PATCH 1,5	Patch cable, CAT5, assembled, 1.5 m
2832629	FL CAT5 PATCH 10,0	Patch cable, CAT5, assembled, 10.0 m
2832289	FL CAT5 PATCH 2,0	Patch cable, CAT5, assembled, 2.0 m


2832292	FL CAT5 PATCH 3,0	Patch cable, CAT5, assembled, 3.0 m
2832580	FL CAT5 PATCH 5,0	Patch cable, CAT5, assembled, 5.0 m
2832616	FL CAT5 PATCH 7,5	Patch cable, CAT5, assembled, 7.5 m

**General**

2832991	FL RJ45 PROTECT CAP	Dust protection caps for RJ45 female connector
---------	---------------------	--

**Diagrams/Drawings**

Dimensioned drawing

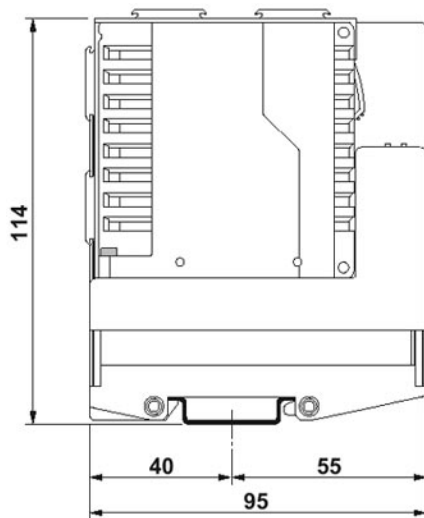

The illustration shows a version of the interface module with the head station FL SWITCH MM HS

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;