



VS-09-ST-DSUB-EG

Order No.: 1688793



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1688793>

D-SUB contact insert, shell size 1, with nine signal contacts, contact type pin, with solder cup, straight, fixing with a 3 mm hole, for panel mounting frame and sleeve housing VS-09-...

Commercial data		Product notes
GTIN (EAN)		WEEE/RoHS-compliant since: 06/14/2006
sales group	D501	
Pack	10 pcs.	
Customs tariff	85366990	
Catalog page information	Page 319 (PC-2009)	
		<p>http://www.download.phoenixcontact.com Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.</p>

Technical data	
Mechanical characteristics	
Number of positions	9
Insertion/withdrawal cycles	≥ 200
Type of connection	Solder cup
Conductor cross-section	0.5 mm ²

Connection cross-section AWG	20
Insertion force per signal contact	≤ 3.40 N
Ambient temperature (operation)	-55 °C ... 125 °C

Material data

Inflammability class acc. to UL 94	V0
Housing material	Steel
Housing surface material	Tin-plated
Contact carrier material	Polyester GF
Contact material	Copper alloy
Contact surface material	Hard gold-plated over nickel


Electrical characteristics

Rated voltage (III/3)	125 V
Rated surge voltage	1 kV
Rated current	5 A

Diagrams/Drawings

Dimensioned drawing

D-SUB contact insert

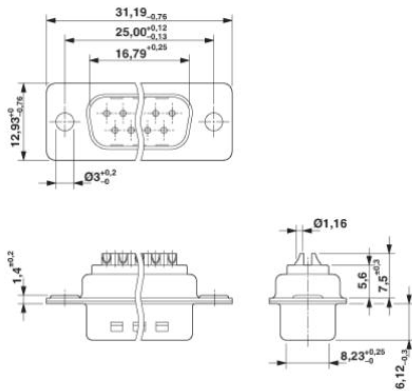

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;