



# VS-15-BU-DSUB-FK

Order No.: 1688900



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1688900>

D-SUB contact insert, shell size 2, with 15 signal contacts, contact type socket, flat-ribbon cable connection, angled, fixing with a 3 mm hole, for panel mounting frame VS-15-...

Commercial data		Product notes
GTIN (EAN)		WEEE/RoHS-compliant since: 06/29/2006
sales group	D501	
Pack	10 pcs.	
Customs tariff	85366990	
Catalog page information	Page 321 (PC-2009)	

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
<b>Mechanical characteristics</b>	
Number of positions	15
Insertion/withdrawal cycles	≥ 200
Type of connection	Flat-ribbon cable connection
Ambient temperature (operation)	-55 °C ... 125 °C
<b>Material data</b>	
Inflammability class acc. to UL 94	V0

Housing material	Steel, yellow chromated
Contact carrier material	Polyester GF
Contact material	Copper alloy
Contact surface material	Hard gold-plated over nickel


#### Electrical characteristics

Rated voltage (III/3)	125 V
Rated surge voltage	1 kV
Rated current	5 A

#### Diagrams/Drawings

Dimensioned drawing

D-SUB contact insert

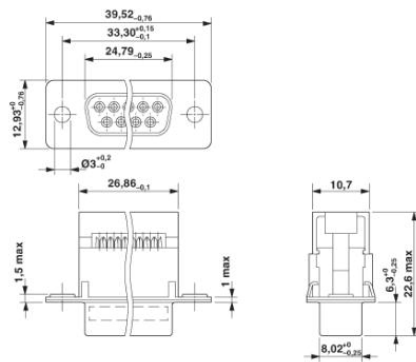

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;