


## VS-15-ST-DSUB-FK

Order No.: 1688890

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1688890>

D-SUB contact insert, shell size 2, with 15 signal contacts, contact type pin, flat-ribbon cable connection, angled, fixing with a 3 mm hole, for panel mounting frame VS-15-...

### Commercial data

GTIN (EAN)	
sales group	D501
Pack	10 pcs.
Customs tariff	85366990
Catalog page information	Page 321 (PC-2009)

### Product notes

WEEE/RoHS-compliant since:  
06/07/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### Mechanical characteristics

Number of positions	15
Insertion/withdrawal cycles	≥ 200
Type of connection	Flat-ribbon cable connection
Ambient temperature (operation)	-55 °C ... 125 °C

**Material data**

Inflammability class acc. to UL 94	V0
Housing material	Steel, yellow chromated
Contact carrier material	Polyester GF
Contact material	Copper alloy
Contact surface material	Hard gold-plated over nickel


**Electrical characteristics**

Rated voltage (III/3)	125 V
Rated surge voltage	1 kV
Rated current	5 A

**Diagrams/Drawings**

Dimensioned drawing

D-SUB contact insert

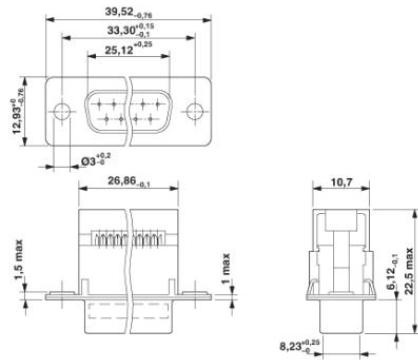

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;