


# CK4,0-ED-2,50ST AG

Order No.: 1663242




<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1663242>

Turned 4.0 crimp contact, individual male contact, core diameter 2.50 mm<sup>2</sup>, silver-plated

Commercial data	
GTIN (EAN)	 4 017918 123055
sales group	D090
Pack	25 pcs.
Customs tariff	74152900
Catalog page information	Page 529 (PC-2009)

**Product notes**

WEEE/RoHS-compliant since:  
12/01/2005



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

Electrical characteristics	
Note	For HC-M-3 modules
Ambient temperature (operation)	-40 °C ... 125 °C
Mechanical characteristics	
Conductor cross-section	2.5 mm <sup>2</sup>

Connection cross-section AWG	14
Stripping length of the individual wire	9 mm
Insertion/withdrawal cycles	≥ 500

**General characteristics**

Type	Individual male contact
------	-------------------------

**Material data**

Contact material	Copper alloy
Contact surface material	hard-silver plated

**Certificates / Approvals**




Certification GOST, UL

**Accessories**

Item	Designation	Description
<b>Tools</b>		
1662735	CK4,0-EWZ	Contact removal tool, for rotated CK-4,0-... contacts
1205846	CRIMPFOX-4,0-ED-2,50	Crimping pliers, for CK 4.0... contacts, for conductor cross sections 1.5 - 2.5 mm <sup>2</sup>
1205859	CRIMPFOX-4,0-ED-6,00	Crimping pliers, for CK 4.0... contacts, for conductor cross sections 3.0 - 6.0 mm <sup>2</sup>

**Diagrams/Drawings**

Dimensioned drawing

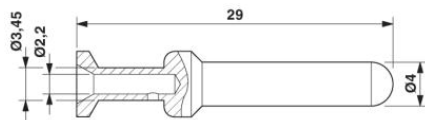

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;