

## SFLY 2,5/F32/ZD


Order No.: 2285470

The illustration shows the version SFLY 2,5/F 32/ZB



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2285470>

Screw socket, Nominal current: 4 A, Number of positions: 32, Pitch: 5.08 mm, Color: green

| Commercial data          |  |
|--------------------------|--|
| GTIN (EAN)               | <br>4 017918 055950 |
| sales group              | E311   |
| Pack                     | 10 pcs.  |
| Customs tariff           | 85369010   |
| Catalog page information | Page 344 (CC-2005)   |

### Product notes

WEEE/RoHS-compliant since:  
05/27/2008



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

| Dimensions / positions |         |
|------------------------|---------|
| Length                 | 40 mm   |
| Height                 | 35.5 mm |
| Width                  | 95 mm   |
| Pitch                  | 5.08 mm |
| Number of positions    | 32      |

---

|                        |        |
|------------------------|--------|
| Hole diameter          | 2.8 mm |
| Screw thread           | M3     |
| Tightening torque, min | 0.5 Nm |
| Tightening torque max  | 0.6 Nm |

**Technical data**

|                                    |          |
|------------------------------------|----------|
| Range of articles                  | SFLY 2,5 |
| Insulating material group          | I        |
| Rated surge voltage (III/3)        | 4 kV     |
| Connection in acc. with standard   | EN-VDE   |
| Nominal current $I_N$              | 4 A      |
| Nominal voltage $U_N$              | 250 V    |
| Insulating material                | PA       |
| Inflammability class acc. to UL 94 | V2       |
| Stripping length                   | 8 mm     |

**Connection data**

|  |                     |
|--|---------------------|
| Conductor cross section solid min.     | 0.2 mm <sup>2</sup> |
| Conductor cross section solid max.     | 4 mm <sup>2</sup>   |
| Conductor cross section stranded min.  | 0.2 mm <sup>2</sup> |
| Conductor cross section stranded max.  | 2.5 mm <sup>2</sup> |
| Conductor cross section AWG/kcmil min. | 24                  |
| Conductor cross section AWG/kcmil max  | 12                  |

**Certificates / Approvals**




Certification

GOST

Diagrams/Drawings

Dimensioned drawing

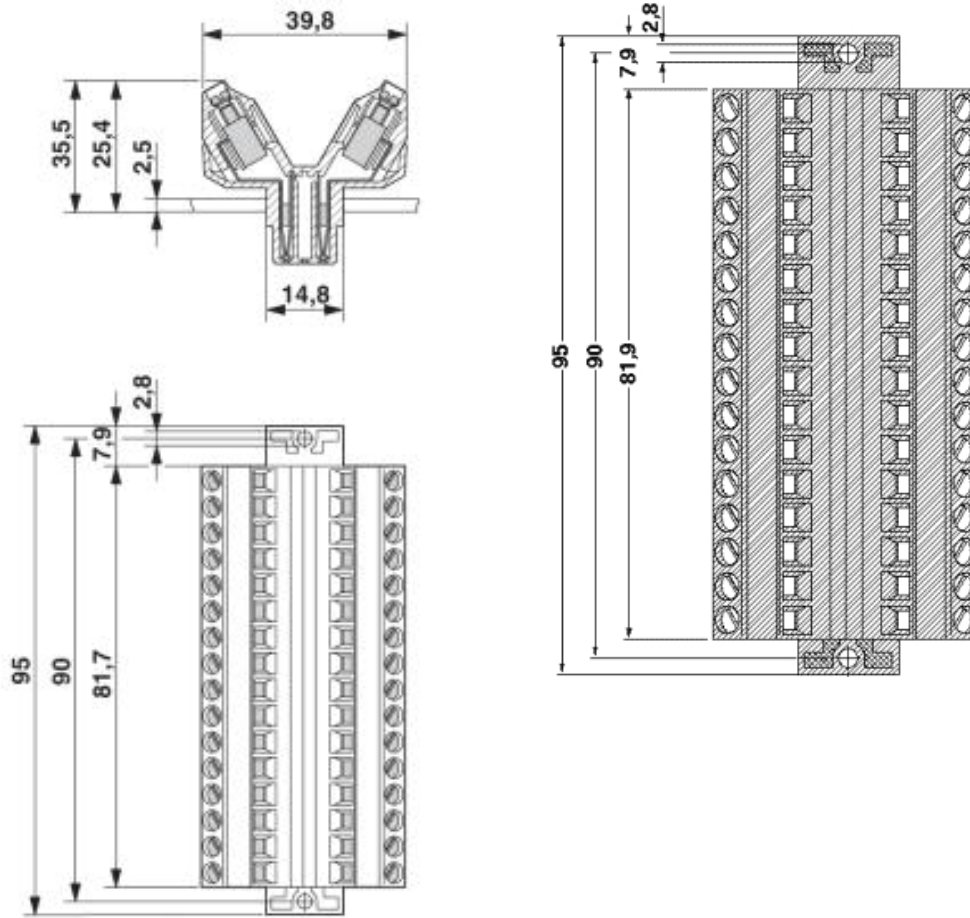

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;