

UM-DELTA V/A/SI

Order No.: 5603256




<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=5603256>

Fuse module with separable test sockets and shield connection terminals (for analog cards of the Delta V control system)



Commercial data

| | |
|--------------------------|---|
| GTIN (EAN) |  4 017918 955021 |
| Note | Made-to-order |
| sales group | I630 |
| Pack | 1 pcs. |
| Customs tariff | 85369010 |
| Catalog page information | Page 200 (IF-2009) |

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

| | |
|---|--|
| Nominal voltage U_N | 24 V DC |
| Max. current carrying capacity per branch | 50 mA (in as-supplied state, with one 50 mAF fuse, max. 1 A permitted) |
| Number of positions | 16 |
| Width | 61 mm |
| Height | 126 mm |
| Depth | 71 mm |

| | |
|---|-----------------------|
| Ambient temperature (operation) | -20 °C ... 50 °C |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |
| Test voltage | 500 V (50 Hz, 1 min.) |
| Mounting position | Any |
| Standards/regulations | IEC 60664 |
| | DIN EN 50178 |
| | IEC 62103 |

Connection data

| | |
|--|--|
| Connection 1 | Field level |
| Type of connection | Screw connection |
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 4 mm ² |
| Conductor cross section stranded min. | 0.2 mm ² |
| Conductor cross section stranded max. | 2.5 mm ² |
| Conductor cross section AWG/kcmil min. | 24 |
| Conductor cross section AWG/kcmil max | 12 |
| Stripping length | 7 mm |
| Screw thread | M3 |
| Connection 2 | Control system level |
| Type of connection | Flat-ribbon cable plug connector in acc. with IEC 60603-13 |
| Number of positions | 16 |

Certificates / Approvals




Certification

CUL, UL

Diagrams/Drawings

Circuit diagram

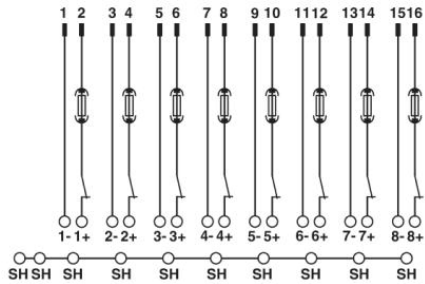

Connection scheme UM-DELTA V/A/SI

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;