

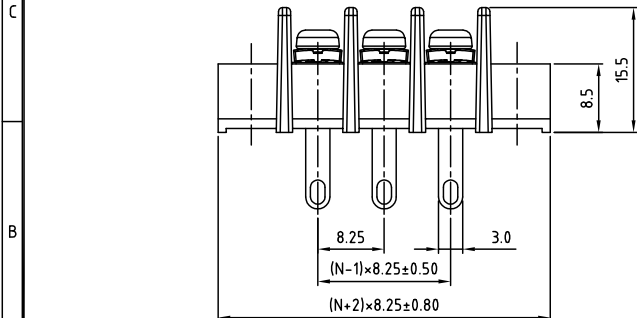


1	2	3	4	5	6	7
SIGN		DATE		DESCRIPTION		APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!						

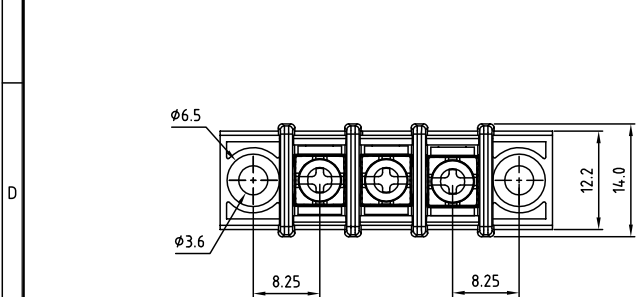

N=Number of poles



SPECIFICATIONS
VOLTAGE & CURRENT: 300 V, 20 A
WITHSTANDING VOLTAGE: AC 2000 V/Min
INSULATION RESISTANCE: 1000 MΩ OR MORE AT DC 500 V
TEMPERATURE RANGE: -40 °C ±105 °C
SCREW TORQUE VALUE: 8.8 Lb-in.
WIRE RANGE: 22 - 12 AWG
1) MOLDED PARTS: THERMOPLASTIC, UL 94 V-0 BLACK
2) TERMINAL: BRASS, 0.8t, Tin PLATED
3) TERMINAL SCREWS: STEEL, Ni PLATED, M3
APPROVAL:

RoHS Compliant

PART NUMBER:
OSTYK413XX330

NO. OF POLES
 02: 2 POLES
 03: 3 POLES
 04: 4 POLES
 ...
 20: 20 POLES

ON-SHORE TECHNOLOGY, INC.		TITLE		OSTYK-413 With Flange Series	
		PART NO.		OSTYK413XX330	
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.
Shi Jun 2007.07.18		Seamus 2007.07.18	LUCY 2007.7.18	LUCY 2007.7.18	
		SHEET: 01/01		REV: C	
		Tolerance			
		X.		±0.50	
		X.X		±0.30	
		X.XX		±0.10	
		X*		±1*	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

1	2	3	4	5	6	7
---	---	---	---	---	---	---