
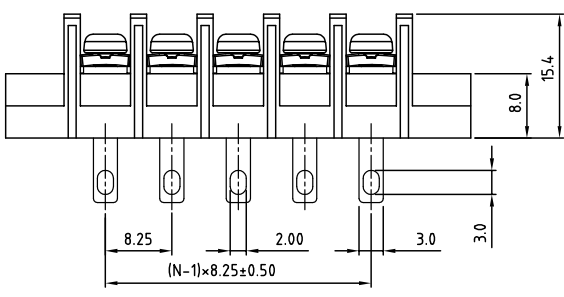


SIGN	DATE	DESCRIPTION	APPROVER

*THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!*

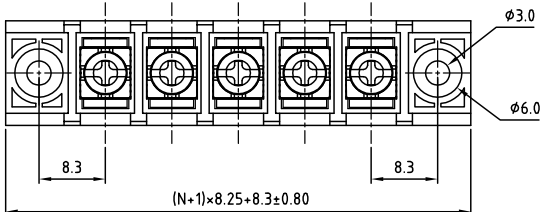

**SPECIFICATIONS**

VOLTAGE & CURRENT: 300 V, 20 A  
 WITHSTANDING VOLTAGE: AC 2000 V/Min  
 INSULATION RESISTANCE: 1000 MΩ OR MORE AT DC 500 V  
 TEMPERATURE RANGE: -40 °C ~ +105 °C  
 SCREW TORQUE VALUE: 7 Lb-In.  
 WIRE RANGE: 22 - 12 AWG

1) MOLDED PARTS: Thermoplastic ( UL 94 V-0 )  
 2) TERMINAL: BRASS, 0.8t, Tin PLATED  
 3) TERMINAL SCREWS: STEEL, Ni PLATED, M3

APPROVAL:

RoHS Compliant

PART NUMBER: **OSTYK403XX330**

NO. OF POLES  
 02: 2 POLES  
 03: 3 POLES  
 04: 4 POLES  
 ...  
 30: 30 POLES

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

N=Number of poles

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	
A	33.05	41.30	49.55	57.80	66.05	74.30	82.55	90.80	99.05	107.30	115.55	123.80	132.05	140.30	148.55	
B	8.25	16.50	24.75	33.00	41.25	49.50	57.75	66.00	74.25	82.50	90.75	99.00	107.25	115.50	123.75	
TOL	0.30				0.40				0.50							
POLE	17	18	19	20	21	22	23	24	25	26	27	28	29	30		
A	156.80	165.05	173.30	181.55	189.80	198.05	206.30	214.55	222.80	231.05	239.30	247.55	255.80	264.05		
B	132.00	140.25	148.50	156.75	165.00	173.25	181.50	189.75	198.00	206.25	214.50	222.75	231.00	239.25		
TOL	0.60						0.80									

ON-SHORE TECHNOLOGY, INC.

TITLE		OSTYK-403 With Flange&W/O Cover Series													
PART NO.		OSTYK403XX330		DWG NO. OSTYK403XX330.DWG											
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.											
Shi Jun 2007.07.18	Seamus 2007.07.18	LUCY 2007.7.18	LUCY 2007.7.18												
				UNIT: mm SCALE: NONE SHEET: 01/01 REV.: C											
				<table border="1" style="font-size: 8px;"> <tr> <th colspan="2">Tolerance</th> </tr> <tr> <td>X.</td> <td>±0.50</td> </tr> <tr> <td>X.X</td> <td>±0.30</td> </tr> <tr> <td>X.XX</td> <td>±0.10</td> </tr> <tr> <td>X*</td> <td>±1*</td> </tr> </table>		Tolerance		X.	±0.50	X.X	±0.30	X.XX	±0.10	X*	±1*
Tolerance															
X.	±0.50														
X.X	±0.30														
X.XX	±0.10														
X*	±1*														