

| SIGN | DATE | DESCRIPTION | APPROVER |
|------|------|-------------|----------|
| | | | |
| | | | |
| | | | |

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

SPECIFICATIONS




VOLTAGE & CURRENT: 300 V, 25 A
 WITHSTANDING VOLTAGE: AC 2000 V/Min
 INSULATION RESISTANCE: 1000 MΩ OR MORE AT DC 500 V
 TEMPERATURE RANGE: -40 °C ±105 °C
 SCREW TORQUE VALUE: 8.8 Lb-In.
 WIRE RANGE: 22 - 12 AWG
 1) MOLDED PARTS: Thermoplastic (UL 94 V-0)
 2) TERMINAL: BRASS, 0.8t, Tin PLATED
 3) TERMINAL SCREWS: STEEL, Ni PLATED, M3.5
 APPROVAL: (S) PENDING

RoHS Compliant

PART NUMBER: OSTYK616XX030

NO. OF POLES
 02: 2 POLES
 03: 3 POLES
 04: 4 POLES
 :
 30: 30 POLES

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

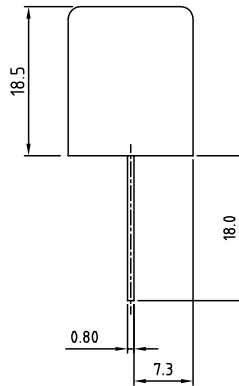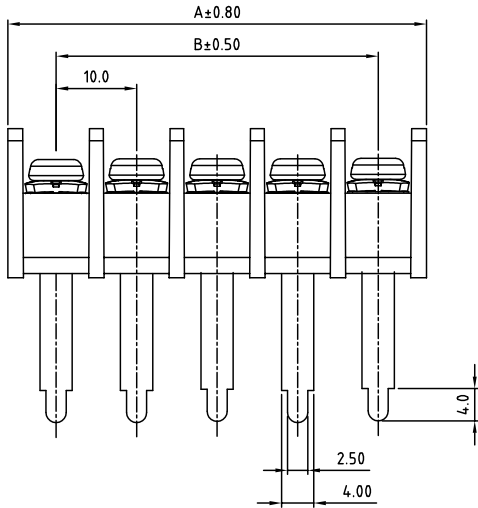

| | | | | | | | | | | | | | | | |
|------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| POLE | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
| A | 22.00 | 32.00 | 42.00 | 52.00 | 62.00 | 72.00 | 82.00 | 92.00 | 102.00 | 112.00 | 122.00 | 132.00 | 142.00 | 152.00 | 162.00 |
| B | 10.00 | 20.00 | 30.00 | 40.00 | 50.00 | 60.00 | 70.00 | 80.00 | 90.00 | 100.00 | 110.00 | 120.00 | 130.00 | 140.00 | 150.00 |
| POLE | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | |
| A | 172.00 | 182.00 | 192.00 | 202.00 | 212.00 | 222.00 | 232.00 | 242.00 | 252.00 | 262.00 | 272.00 | 282.00 | 292.00 | 302.00 | |
| B | 160.00 | 170.00 | 180.00 | 190.00 | 200.00 | 210.00 | 220.00 | 230.00 | 240.00 | 250.00 | 260.00 | 270.00 | 280.00 | 290.00 | |

ON-SHORE TECHNOLOGY, INC.

| TITLE | | OSTYK-616 W/O Flange Series | |
|-----------------------|----------------------|-----------------------------|-------------------|
| PART NO. | OSTYK616XX030 | DWG NO. | OSTYK616XX030.DWG |
| APPROVED | CHECKED | DESIGNED | DRAWN |
| Shi Jun 2007.07.18 | Seamus 2007.07.18 | LUCY 2007.7.18 | LUCY 2007.7.18 |
| SHEET: 01/01 | | REV: B | |

| Tolerance | |
|-----------|-------|
| X. | ±0.50 |
| X.X | ±0.30 |
| X.XX | ±0.10 |
| X* | ±1* |