

SIGN	DATE	DESCRIPTION	APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			




SPECIFICATIONS

VOLTAGE & CURRENT:	DC 24 V, 30 A
WITHSTANDING VOLTAGE:	AC 2000 V/Min
INSULATION RESISTANCE:	1000 MΩ OR MORE AT DC 500 V
TEMPERATURE RANGE:	-40 °C ~ +105 °C
SCREW TORQUE VALUE:	10 Kgf.cm
WIRE RANGE:	22 - 12 AWG
1) MOLDED PARTS:	Thermoplastic (UL 94 V-0)BLACK
2) TERMINAL:	BRASS, 15t, Tin PLATED
3) TERMINAL SCREWS:	STEEL, Ni PLATED, M5

APPROVAL: (Signature) Pending

RoHS Compliant

PART NUMBER:
OSTYK11E03030

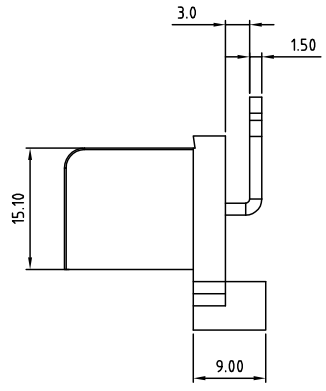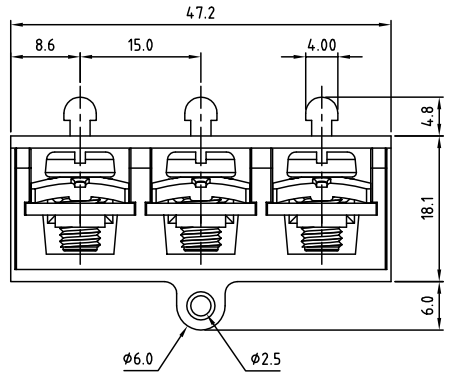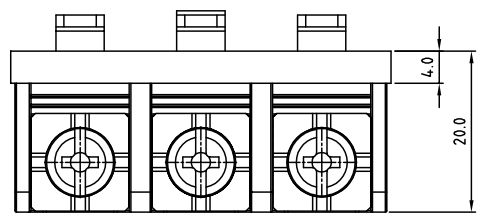

OST ON-SHORE TECHNOLOGY, INC.									
TITLE		OSTYK-11E-3P							
PART NO.		OSTYK11E03030				DWG NO.		OSTYK11E03030.DWG	
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance			
Shi Jun 2007.07.18		Seamus 2007.07.18	LUCY 2007.7.18	LUCY 2007.7.18		UNIT: mm		X.	±0.50
						SCALE: NONE		X.X	±0.30
						SHEET: 01/01		X.XX	±0.10
						REV: D		X*	±1*

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.