

SIGN	DATE	DESCRIPTION	APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			



SPECIFICATIONS

VOLTAGE & CURRENT: 300V, 25A
 WITHSTANDING VOLTAGE: AC 2000 V/Min
 INSULATION RESISTANCE: 1000 MΩ OR MORE AT DC 500 V
 TEMPERATURE RANGE: -40 °C ~ +105 °C
 SCREW TORQUE VALUE: 8.8 Lb-In.
 WIRE RANGE: 22 - 12 AWG
 1) MOLDED PARTS: POLYIMIDE 66, UL 94 V-0 BLACK
 2) TERMINAL: BRASS, 0.8t, Tin PLATED
 3) TERMINAL SCREWS: STEEL, Ni PLATED, M3.5
 APPROVAL:

RoHS Compliant

PART NUMBER: OSTYK510XX330

No. of Poles
 02: 2 Poles
 03: 3 Poles
 04: 4 Poles
 ...
 30: 30 Poles

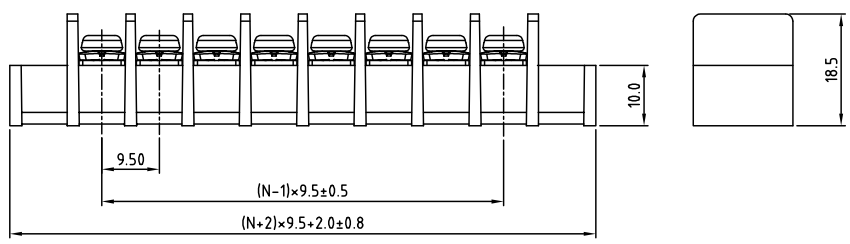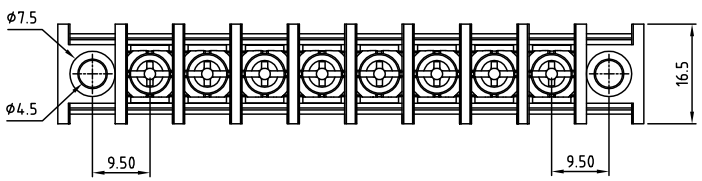

N= Number of contacts



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE		OSTYK-510 with Flange Series				
PART NO.		OSTYK510XX330		DWG NO.		OSTYK510XX330.DWG
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance
Shi Jun 2006.11.07		Seamus 2006.11.06	Tony 2006.02.04	Tony 2006.02.04		UNIT: mm SCALE: NONE
					SHEET: 01/01	REV: B
						X. ±0.50 X.X ±0.30 X.XX ±0.10 X* ±1*