


CT-TERMIBLOCK 10 DA

Order No.: 0441711



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=0441711>

Screw termination block with disconnect contacts for accommodating protective plugs CT and CTM. Use in MCR and telecommunications systems. Design: 10 double wires

Commercial data	
GTIN (EAN)	 4 017918 002213
sales group	J468
Pack	10 pcs.
Customs tariff	85369010
Catalog page information	Page 118 (TT-2009)

Product notes

WEEE/RoHS-compliant since:
06/28/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
General	
Housing material	PA
Inflammability class acc. to UL 94	V2
Color	black

Standards for air and creepage distances	IEC 60664-1
Surge voltage category	III
Pollution degree	3
Ambient temperature (operation)	-40 °C ... 85 °C
Mounting type	NS 32/NS 35
Design	LSA-PLUS module
Degree of protection	IP20
Width	116.90 mm
Height	40.50 mm
Length	42.50 mm

Protective circuit

Maximum continuous voltage U_C (wire-wire)	240 V AC
Maximum continuous voltage U_C (wire-ground)	250 V AC
Operating effective current I_C at U_C	5 A

Connection data

Type of connection	Screw terminal blocks
Connection type IN	Screw terminal blocks
Connection type OUT	Screw terminal blocks
Screw thread	M3
Tightening torque	0.5 Nm
Stripping length	7 mm
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	14

Certificates / Approvals




Certification

GOST, UL

Diagrams/Drawings

Dimensioned drawing

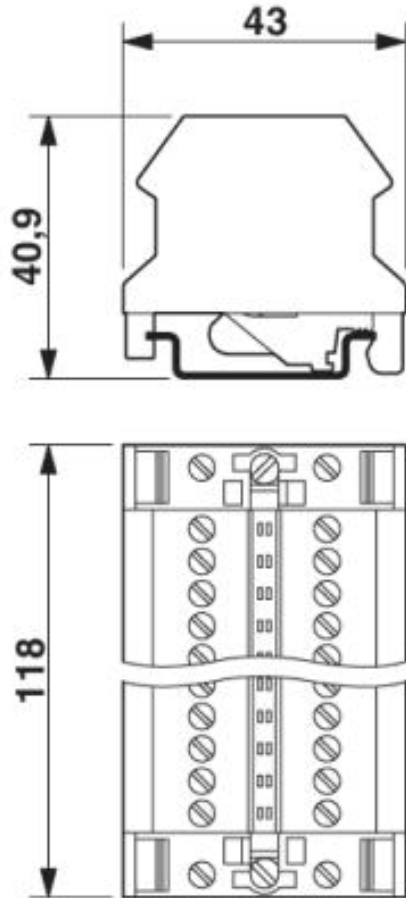

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;