

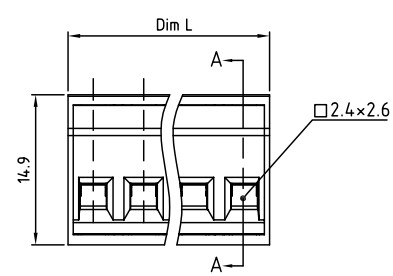


SIGN	DATE	DESCRIPTION	APPROVER

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!



N=Number of poles



SECTION A-A

- Material**
- Insulating body: Thermoplastic (UL94V-0)
 - Insulating cover: Thermoplastic (UL94V-0)
 - Terminal screw: Steel Zinc plating M3
 - Terminal body(house): Brass, Ni plated
 - Wire guard: PHBz, Tin plated
- Electrical**
- Voltage rating: 300V
 - Current rating: 15A
 - Wire range: Solid wire(AWG): 12-28, Stranded wire(AWG): 12-28
 - Torque: 4.5Lb-In
 - Screw: M3
 - Wire strip length: 5-6mm
 - Withstanding Voltage: 1.6KV
 - Operating temperature: -40°C to +115°C
 - Safety Approval: us
- RoHS Compliant

PART NUMBER:

OSTEOXX0102

- | | |
|--------------|---------------------|
| No. of Poles | COLOR |
| 02 2 Poles | 0: Black (Standard) |
| 03 3 Poles | 5: Green |
| ... | 6: Blue |
| 124 12 Poles | 8: Grey |

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

Dim L=N×5.0
Dim B=(N-1)×5.0

Poles	02	03	04	05	06	07	08	09	10	11	12
Dim L	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00	60.00
Dim B	5.00	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00	50.00	55.00
TOL	±0.10			±0.15			±0.20				

TITLE		OSTEO 5.0 series (A type 1.90mm)			
PART NO.		OSTEOXX0102		DWG NO. OSTEOXX0102.DWG	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Jacke 2009.02.23	Jacke 2009.02.23		
				UNIT: mm	Tolerance
				SCALE: NONE	X. ±0.50
				SHEET: 01/01	X.XX ±0.30
				REV: B	X.XXX ±0.10
					X* ±1*