
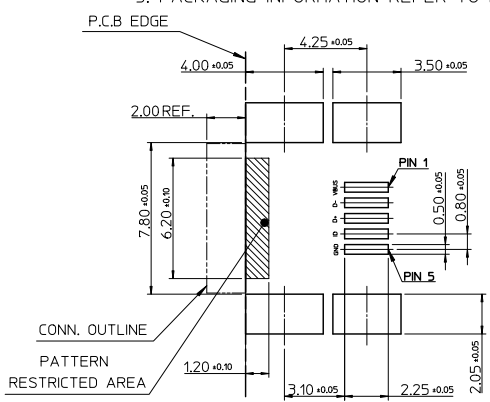



NOTE :

- MATERIAL :
HOUSING : NYLON GLASS FILLED , BLACK,UL94V-0
TERMINAL : COPPER ALLOY THICKNESS = 0.2 MM
SHIELD CASE : COPPER ALLOY THICKNESS = 0.4 MM
- PLATING :
TERMINAL:
CONTACT AREA : GOLD 0.75 MICROMETER MINIMUM.
SOLDER TAIL AREA : PURE TIN 3.8 MICROMETER MINIMUM.
UNDER PLATING : NICKEL 1.25 MICROMETER MINIMUM.
SHIELD CASE :
PURE TIN: 1-3 MICROMETER .
UNDER PLATING : NICKEL 1.0 MICROMETER MINIMUM.
- TAIL & NAIL COPLANARITY 0.1 mm MAXIMUM.
- PRODUCT SPECIFICATION REFER TO PS-67803-001.
- PACKAGING INFORMATION REFER TO PK-67503-001.

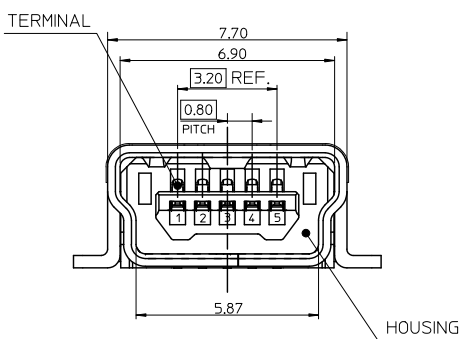

RECOMMENDED P.C.B. PATTERN LAYOUT

MYLAR CHANGE EC NO: SH2011-0257 DRAWN BY: JONG CHKD: APPR:RZHNG 2011/03/14 2011/03/16	DESCRIPTION REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION													
		$\nabla=0$ $\nabla=0$ $\nabla=0$	<table border="1"> <tr><th>mm</th><th>INCH</th></tr> <tr><td>4 PLACES ±---</td><td>±---</td></tr> <tr><td>3 PLACES ±---</td><td>±---</td></tr> <tr><td>2 PLACES ±0.25</td><td>±---</td></tr> <tr><td>1 PLACE ±0.25</td><td>±---</td></tr> <tr><td colspan="2">ANGULAR ± 3°</td></tr> </table>	mm	INCH	4 PLACES ±---	±---	3 PLACES ±---	±---	2 PLACES ±0.25	±---	1 PLACE ±0.25	±---	ANGULAR ± 3°		MM ONLY	8:1	METRIC	DRAWN BY: LXWANG DATE: 2004/11/12 CHECKED BY: HARVEY DATE: 2004/11/12 APPROVED BY: YTYAP DATE: 2004/11/12	TITLE: USB SERIES MINI-B REC. REC. ASS'Y FOR SMT W/O BACKOVER&PEG(LEAD-FREE) MOLEX INCORPORATED
		mm	INCH																	
		4 PLACES ±---	±---																	
3 PLACES ±---	±---																			
2 PLACES ±0.25	±---																			
1 PLACE ±0.25	±---																			
ANGULAR ± 3°																				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	MATERIAL NO. 675031230	DOCUMENT NO. SD-67503-011	SHEET NO. 1 OF 1																	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																				