

RL 90-18/56

AC centrifugal compact fan

single inlet



ebm-papst St. Georgen GmbH & Co. KG

Hermann-Papst-Straße 1

78112 St. Georgen

Phone: +49 7724 81-0

Fax: +49 7724 81-1309

www.ebmpapst.com

info2@de.ebmpapst.com

Nominal data


Type	RL 90-18/56	
Nominal voltage	[VAC]	230
Frequency	[Hz]	50
Speed	[min ⁻¹]	2450
Power input	[W]	20.0
Min. ambient temperature	[°C]	-30
Max. ambient temperature	[°C]	70
Air flow	[m ³ /h]	40
Sound power level	[B]	5.6

ml = max. load · me = max. efficiency · rfa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations

Technical features

Dimensions	121 x 121 x 37 mm
General description	AC fan with external rotor shaded-pole motor. Housing base with flat plug 6.3 x 0.8 mm for ground line.
Connection line	2 single strands AWG 22
Direction of protection	Right, looking at rotor
Direction of air flow	Centrifugal, air exhaust out of housing window
Bearing	Ball bearings
Lifetime L10 at 40 °C	37500 h
Lifetime L10 at maximum temperature	20000 h
Mass	0.680 kg
Housing material	Spiral housing of fiberglass-reinforced plastic. Housing base of galvanized sheet steel.
Material of impeller	Fiberglass-reinforced plastic
Motor protection	Protected from overload using impedance protection
Approval	VDE, CSA, UL, CE

Product drawing

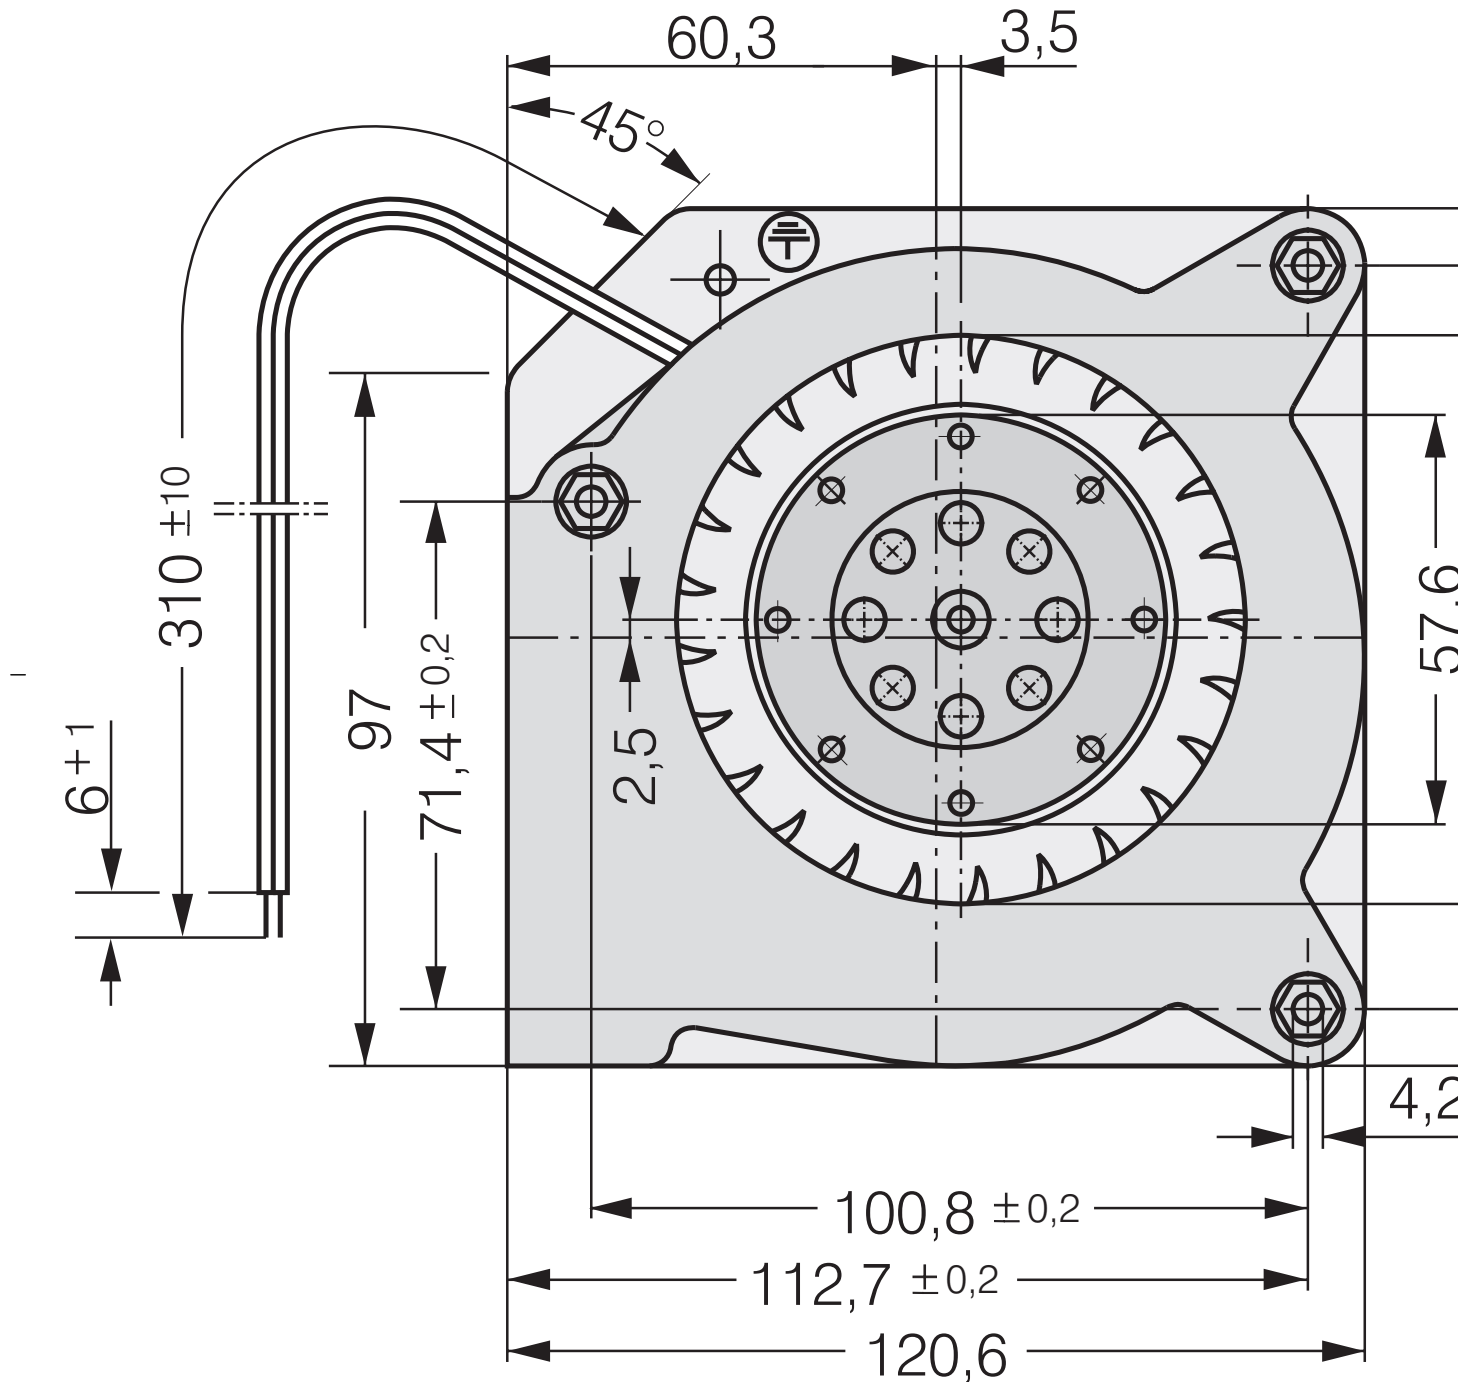

*Federmutter M4 oder 8-32UNC. Ein Speed nut M4 or 8-32UNC. Screw-i

Charts: Air flow

