

## **SPECIFICATIONS**

**Model Number**: MX2A4 **Part Number**: 028527





## **Mechanical Drawing:**

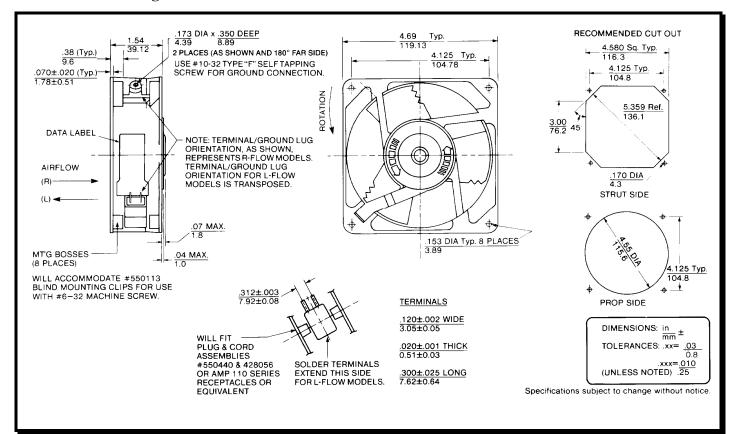

#### **Motor:**

 $\begin{array}{lll} \mbox{Nominal Voltage} & = 115 \mbox{ VAC} \\ \mbox{Frequency} & = 50/60 \mbox{ Hz} \\ \mbox{Nominal Running Current} & = 0.20/0.18 \mbox{ amps} \\ \mbox{Locked Rotor Current} & = 0.28/0.27 \mbox{ amps} \\ \mbox{Running Power} & = 17/15 \mbox{ Watts} \\ \mbox{Average Speed} & = 2700/3100 \mbox{ RPM} \end{array}$ 

Bearings = Sleeve
Air Flow = 98/115 CFM
Acoustic = 45.6/50.0 dBA

#### **Construction:**

Venturi: Zinc Alloy, Black.

Propeller: Plastic, Black, UL 94V-0

#### **Life Expectancy:**

This fan is designed for continuous duty life of 55,000

hours at 40°C.

## **Additional Features:**

Shaded pole induction motor Automatic Restart Capability

Impedance Protection

Operating Temperature: -28°C to 70°C Storage Temperature: -40°C to 85°C

#### **Termination:**

12" Lead wires

# **Agency Approvals:**

UL, CSA, VDE, CE