Noise Suppression Products/EMI Suppression Filters > EMIFIL® (Capacitor type) > Single Circuit Type for Large Current

20

60

80

100 ⊾ 0.1

Packaging

Code

L

в

Insertion Loss (dB) 40

Insertion Loss Characteristics (Main Items)

10

Packaging

180mm Embossed Tape

Bulk(Bag)


Frequency (MHz)

100


Data Sheet

EMIFIL[®] (Capacitor type) Single Circuit Type for Large Current NFM3DP Series (1206 Size)

Dimensions



Equivalent Circuit



■ Rated Value (□: packaging code)

| Part Number | Capacitance | Rated Current | Rated Voltage | Insulation Resistance (min.) | Operating Temperature Range |
|----------------------|-----------------|---------------|---------------|------------------------------|--------------------------------|
| NFM3DPC223R1H3 | 0.022µF+20%-20% | 2A | 50Vdc | 1000M ohm | -55°C to +125°C |
| Number of Circuit: 1 | | | | | |

Continued on the following page.

3000

1000

Minimum Quantity

4000

500


• This data sheet is applied for CHIP EMIFIL® used for General Electronics equipment for your design.

∆ Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., Itd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.



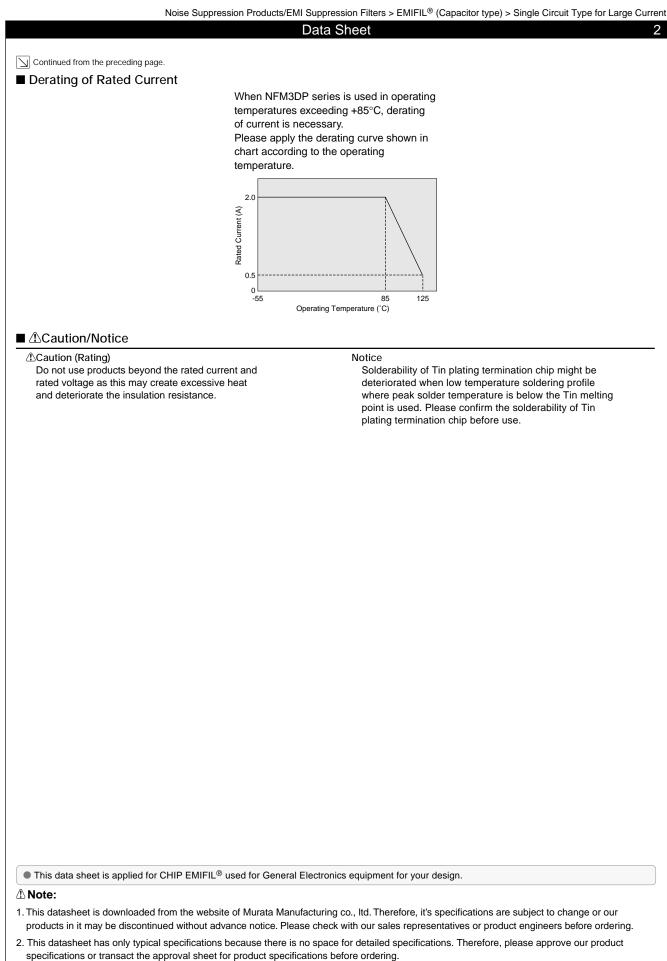

2009.5.1