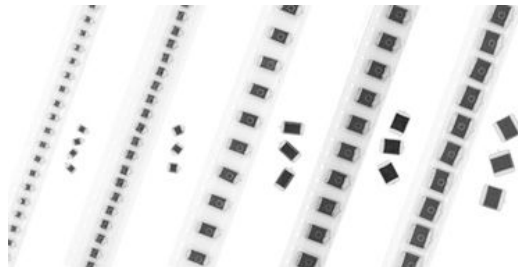


Solid Tantalum Chip Capacitors

Application Specific Pulse Capacitor for Wireless Modems


FEATURES

- Robust design for use in wireless modem applications
- Designed specifically for pulsed operation
- 100 % surge current tested
- Compliant to RoHS Directive 2002/95/EC


RoHS*
 COMPLIANT

PERFORMANCE CHARACTERISTICS

Operating Temperature: - 55 °C to + 125 °C
 (with voltage derating)


Capacitance Tolerance: ± 20 % standard
Capacitance Range: 330 µF to 2200 µF
Voltage Rating: 6.3 WV_{DC} to 10 WV_{DC}

ORDERING INFORMATION

592W	757	X0	010	M	2	T	20H
TYPE	CAPACITANCE	CAPACITANCE TOLERANCE	DC VOLTAGE RATING AT + 85 °C	CASE CODE	TERMINATION	REEL SIZE AND PACKAGING	SUFFIX
	This is expressed in picofarads. The first two digits are the significant figures. The third is the number of zeros to follow.	X0 = ± 20 %	This is expressed in volts. To complete the three-digit block, zeros precede the voltage rating. A decimal point is indicated by an "R" (6R3 = 6.3 V).	See Ratings and Case Codes table	2 = 100 % tin	T = 7" [178 mm] reel	Maximum height (mm) see dimensions

Notes

- Preferred tolerance and reel sizes are in bold
- We reserve the right to supply higher voltage ratings and tighter capacitance tolerance capacitors in the same case size
- Voltage substitutions will be marked with the higher voltage rating

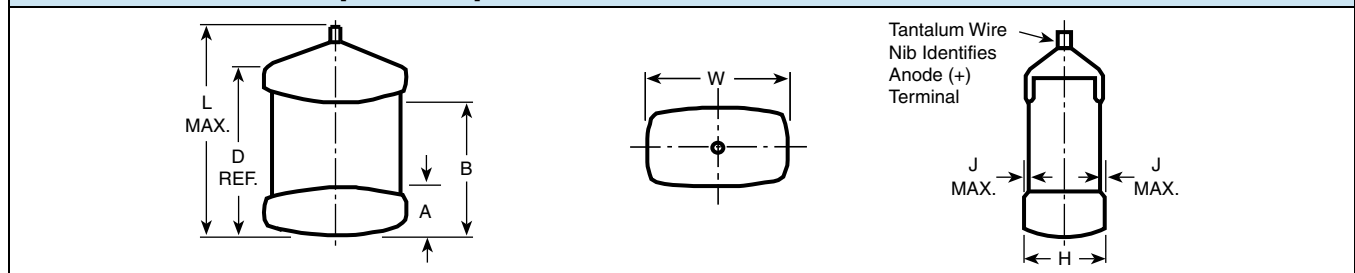DIMENSIONS in inches [millimeters]


* Pb containing terminations are not RoHS compliant, exemptions may apply

DIMENSIONS in inches [millimeters]								
CASE CODE	SUFFIX	H	L MAX.	W	A	B	D REF.	J MAX.
C	16H	0.063 [1.6] max.	0.281 [7.1]	0.126 ± 0.012 [3.2 ± 0.3]	0.051 ± 0.012 [1.3 ± 0.3]	0.180 ± 0.024 [4.4 ± 0.6]	0.238 [6.0]	0.004 [0.1]
C	20H	0.079 [2.0] max.						
M	16H	0.063 [1.6] max.	0.295 [7.5]	0.247 ± 0.012 [6.3 ± 0.3]	0.051 ± 0.012 [1.3 ± 0.3]	0.180 ± 0.024 [4.6 ± 0.6]	0.264 [6.7]	0.004 [0.1]
M	20H	0.079 [2.0] max.	0.295 [7.5]	0.247 ± 0.012 [6.3 ± 0.3]	0.051 ± 0.012 [1.3 ± 0.3]	0.180 ± 0.024 [4.6 ± 0.6]	0.264 [6.7]	0.004 [0.1]
X	16H	0.063 [1.6] max.	0.575 [14.5]	0.290 + 0.010/- 0.020 [7.37 + 0.25/- 0.5]	0.051 ± 0.016 [1.3 ± 0.4]	0.470 ± 0.024 [11.9 ± 0.6]	0.524 [13.2]	0.004 [0.1]
X	20H	0.079 [2.0] max.						

RATINGS AND CASE CODES					
µF	4 V	6.3 V	8.2 V	10 V	16 V
330				C_2.0 ⁽¹⁾	
470		C_1.6 ⁽¹⁾	C_2.0 ⁽¹⁾		
680					
750				M_2.0	
1000				X_2.0 ⁽¹⁾	
1500		M_1.6 ⁽¹⁾		X_2.0 ⁽¹⁾	
2200		X_1.6 ⁽¹⁾			

Note

(1) Preliminary value, contact factory for availability


STANDARD RATINGS						
CAPACITANCE (µF)	CASE CODE	PART NUMBER	MAX. DCL AT + 25 °C (µA)	MAX. DF AT + 25 °C 120 Hz (%)	MAX. ESR AT + 25 °C 100 kHz (Ω)	
6.3 WV_{DC}; 4.0 WV_{DC} AT + 85 °C, 2.5 WV_{DC} AT + 125 °C						
470	C	592W477X06R3C__16H	30	14	0.200	
1500	M	592W158X06R3M__16H	95	50	0.100	
2200	X	592W228X06R3X__16H	139	45	0.070	
8.2 WV_{DC}; 5.2 WV_{DC} AT + 85 °C, 3.3 WV_{DC} AT + 125 °C						
470	C	592W477X08R2C__20H	57	20	0.100	
10 WV_{DC}; 6.3 WV_{DC} AT + 85 °C, 4.0 WV_{DC} AT + 125 °C						
330	C	592W337X0010C__20H	33	20	0.100	
750	M	592W757X0010M__20H	75	35	0.100	
1000	X	592W108X0010X__20H	100	35	0.080	
1500	X	592W158X0010X__20H	150	35	0.050	



Solid Tantalum Chip Capacitors
Application Specific Pulse Capacitor for Wireless Modems

Vishay Sprague

ELECTRICAL PERFORMANCE CHARACTERISTICS						
ITEM	PERFORMANCE CHARACTERISTICS					
Category temperature range	- 55 °C to + 125 °C (with voltage derating)					
Capacitance tolerance	± 20 %, ± 10 % (at 120 Hz) 2 V _{RMS} at + 25 °C using a capacitance bridge					
Dissipation factor (at 120 Hz)	Limits per Standard Ratings table. Tested via bridge method, at 25 °C, 120 Hz					
ESR (100 kHz)	Limits per Standard Ratings table. Tested via bridge method, at 25 °C, 100 kHz					
Leakage current	After application of RV applied to capacitors for 5 min using a steady source of power with 1 kΩ resistor in series with the capacitor under test, leakage current at 25 °C is not more than described in.					
Operation temperatures	Rated voltage	- 55 °C/+ 40 °C	10 V	8.2 V	6.3 V	4.0 V
	Category voltage	+ 40 °C/+ 85 °C	6.3 V	5.2 V	4.0 V	2.5 V
	Category voltage	+ 85 °C/+ 125 °C	4 V	3.3 V	2.5 V	1.6 V

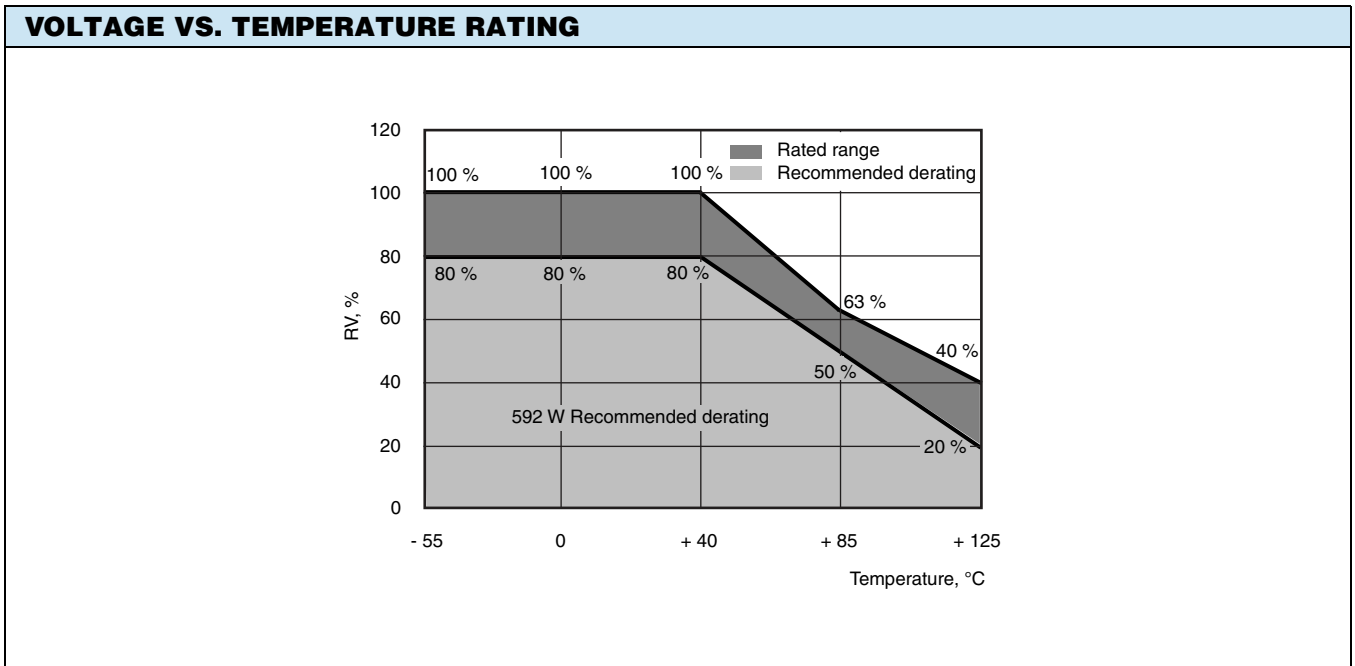



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.