




ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

SPC-F005.DWG

REVISIONS						DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398					
DCP #	REV	DESCRIPTION				DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1891	A	RELEASED				EO	06/27/06	SA	7/25/06	HO	7/25/06

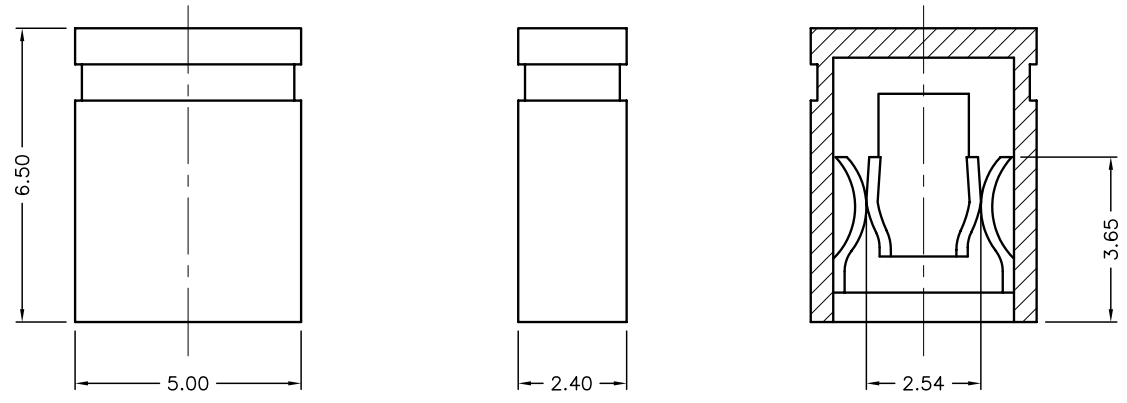

FEATURES:
 Double tuning fork type contact guarantees high reliability 2.54mm pitch Low-profile mini type Males to 0.64mm sg. posts.

MATERIAL:
 Insulator: 30% Glass fiber + P.B.T. (UL 94V-0)
 Terminal: Phosphor bronze Finishing Gold-plated

SPECIFICATIONS:
 Current Rating: 3 A max
 Contact Resistance: 20 Milliohm Max
 Insulation Resistance: 100 Megohm Min
 Dielectric Withstanding voltage: 650 VAC RMS at sea level.

DISCLAIMER:
 ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES: Unless Otherwise Specified .X ±0.2 [0.008] .XX ±0.12 [0.005]	DRAWN BY: EKLAS ODISH	DATE: 06/27/06	DRAWING TITLE: Mini Jumper, Closed Type, 6 mm			
	CHECKED BY: SAMI ALNADI	DATE: 7/25/06	SIZE A	DWG. NO. SPC19808	ELECTRONIC FILE 84K8570.DWG	REV A
	APPROVED BY: HISHAM ODISH	DATE: 7/25/06	SCALE: NTS		U.O.M.: mm [INCHES]	SHEET: 1 OF 1