

Product Data Sheet



670A RZ XX Modified

Replace "XX" with 01 through 36 for number of poles



Terminal Block– Closed Back

15 Amps, 150 Volts (AC/DC)

(Variety of Hardware shown)

Copper Wire Only

#12 - #22 AWG, solid or stranded wire

3/8" Centers

See table below for Wire Classes and torque

Electrical Ratings:

- 15A (Based on NEC Table 310-16, 75°C columns)
- 150 Volts AC/DC (UL 1059 Class B, User Group – Commercial Appliances)
- Short Circuit Current Rating: 10,000A (Default)
- Factory Wiring

Mechanical Ratings:

- Storage and transportation temperature range: -35°C to 110°C (-31°F to 230°F)*
- Maximum insulator base temperature: 130°C (266°F) * UL RTI
- Flammability rating of insulator base: UL 94V-0

* Use outside these ratings needs to be judged in the end-use application.

Materials:

- Connector (Contact): Brass, tin plated.
- Insulator base: Glass filled Polyester
- Drive screw (Rivet): Stainless steel
- Screw, #6-32, phil-slot: Steel, nickel plated

Agency Approvals:

- UL Recognized, UL 1059 Terminal Block Standard, File No. XCFR2.E47811
- CSA Certified, CSA C22.2 No. 158, File No. LR19766
- CE compliant, IEC 60947-7-1
- RoHS Compliant

Wire Range:

Wire Size	Torque	Copper Wire Stranding Classes - Number of Strands		
		Solid	Class B	Class C
12	9 in. Lbs		7	19
14	9 in. Lbs		7	19
16	9 in. Lbs		7	19
18	9 in. Lbs		7	19
20	9 in. Lbs		7	19
22	9 in. Lbs		7	19


Suggested product mounting hardware: #6 fastener, torque to 10-15 in. lbs.

ACCESSORIES:

- Printing: for printing options, see Terminal Block Printing
<http://marathonsp.com/CatalogPDFs/TBPrinting.pdf>

- Cover – top mounted (May not accommodate some hardware options) . Order CW (white) or CB (Black). Can be printed.
<http://marathonsp.com/CatalogPDFs/TopMountedCover.pdf>



- Marking strips  (Sub mounted or Top mounted)

- <http://marathonsp.com/CatalogPDFs/TopMountedMS.pdf>
- <http://marathonsp.com/CatalogPDFs/SubMounted.pdf>

- Line to Line Jumper (J 600)



KT19



KT20



KT21



Tab width: 0.187
Tab thickness: 0.020

- Quick Connects

- Half Quick Connects

KT25



KT26



KT27



- Solder Terminal (ST)



- Half Solder Terminal (3/4 ST)



- Feed Thru Solder (Y)



- Feed Thru Solder (YSY)



- Sems Pressure Saddle Screw (3865)




- Phil-Slot Brass Screw (PSB)



- Multiple Position Jumper (600RJ) or (600RJS)



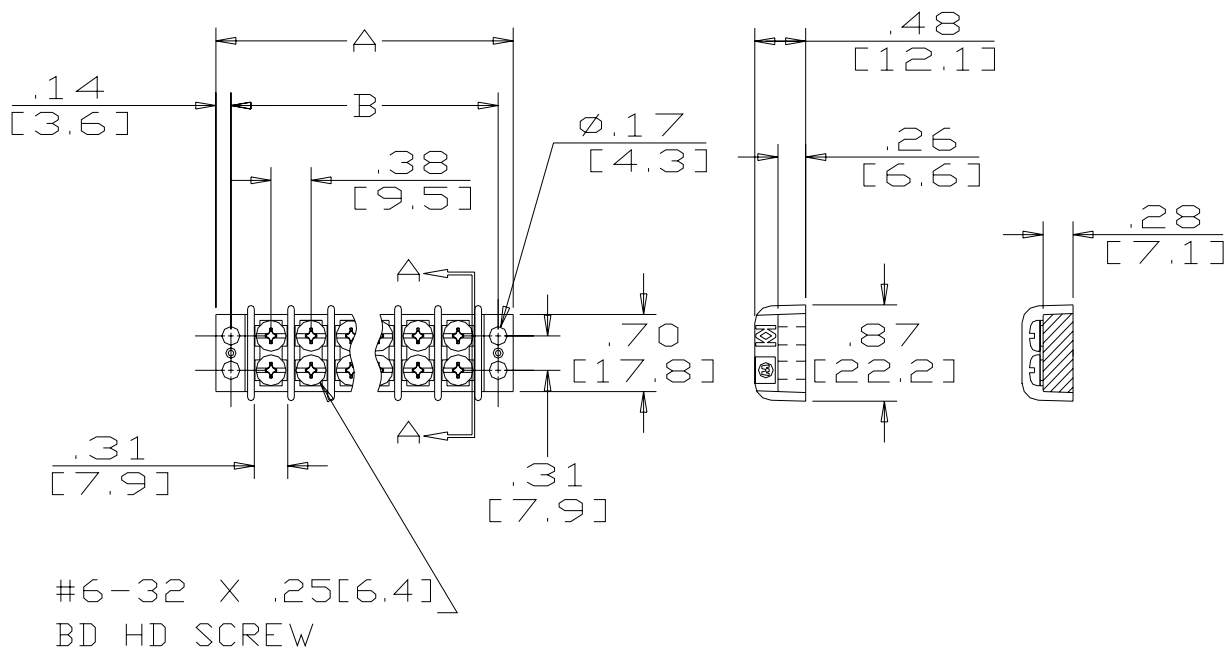

Accessory options may affect ratings – consult factory

Catalog No	# of Poles	Dimensions			Catalog No	# of Poles	Dimensions	
		A	B				A	B
670A RZ 01	1	1.03	0.75	X	670A RZ 19	19	7.78	7.50
670A RZ 02	2	1.41	1.13	X	670A RZ 20	20	8.16	7.88
670A RZ 03	3	1.78	1.50	X	670A RZ 21	21	8.53	8.25
670A RZ 04	4	2.16	1.88	X	670A RZ 22	22	8.91	8.63
670A RZ 05	5	2.53	2.25	X	670A RZ 23	23	9.29	9.01
670A RZ 06	6	2.91	2.63	X	670A RZ 24	24	9.66	9.38
670A RZ 07	7	3.28	3.00	X	670A RZ 25	25	10.04	9.76
670A RZ 08	8	3.66	3.38	X	670A RZ 26	26	10.41	10.13
670A RZ 09	9	4.03	3.75	X	670A RZ 27	27	10.79	10.51
670A RZ 10	10	4.41	4.13	X	670A RZ 28	28	11.17	10.89
670A RZ 11	11	4.78	4.50	X	670A RZ 29	29	11.54	11.26
670A RZ 12	12	5.16	4.88	X	670A RZ 30	30	11.92	11.64
670A RZ 13	13	5.53	5.25	X	670A RZ 31	31	12.29	12.01
670A RZ 14	14	5.91	5.63	X	670A RZ 32	32	12.67	12.39
670A RZ 15	15	6.28	6.00	X	670A RZ 33	33	13.05	12.77
670A RZ 16	16	6.66	6.38	X	670A RZ 34	34	13.42	13.14
670A RZ 17	17	7.03	6.75	X	670A RZ 35	35	13.80	13.52
670A RZ 18	18	7.41	7.13	X	670A RZ 36	36	14.17	13.89

Top Mounted Hardware is .187" Wide

MM = Dim X 25.4

WWW.MARATHONSP.COM
1-419-352-8441

PDS 0281 REV B 8/19/08