


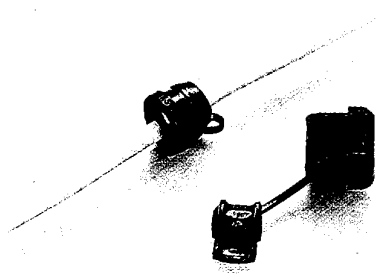


**0705 STRAIN-RELIEF BUSHING**



- Material: UL approved Nylon 66, 94V-2 (Black)
  - Cust assembly cost, prolongs cord life.
- Used extensively for protecting cords of computer, apparatus...etc.

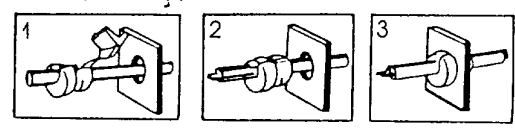


Chassis Thickness

CORD ASSEMBLY

Item No.	Cross Section Shape	Wires Accomodate		Mounting Hole		Part L D	Max. Chassis Thickness F	Packing
		U.L. Wire	Size	A	B			
SR-F21	FLAT	SPT-1	2.3×4.5	9.5	8.7	10.3	0.5~1.6	1000pcs
			2.8×5.3					
SR-F23		SPT-1	2.3×4.5	9.5	8.7	10.3	1.8~3.2	
			2.8×5.3					
SR-F31		SPT-1	3.0×5.6	11.0	9.9	10.3	1.0~1.6	
SR-F32		SPT-1 SP×1	3.0×5.6	11.0	9.9	10.3	1.9~2.5	
SR-F41		SPT-218/2, 16/2	3.0×7.1	12.7	11.8	10.3	0.5~1.6	
			3.8×7.6					
SR-F42		SPT-2	3.0×7.1	12.7	11.8	10.3	1.8~2.5	
			3.8×7.6					
SR-F51	SPT-3	5×10.4	14.3	13.2	15.2	0.5~1.6		
SR-F53	SPT-3	5×10.4	13.2	13.0	15.2	1.8~3.5		
SR-5R1	581 902	SVI, SVT	6.2φ-7.4φ	12.7	11.5	11.0	0.5~1.6	
SR-5R2	581 914	SVI, SVT	6.2φ-7.4φ	12.7	11.5	11.0	1.8~2.5	
SR-6W2	581 926	SVI, SVT	7.6φ	12.7	11.8	11.0	1.8~2.3	
SR-6P1	ROUND 938	SJC3C#18	7.4φ-8.2φ	15.9	14.0	14.8	0.5~1.6	
SR-6P3	SJD 18/3, 16/2 16/3, 18/4 940	SJC3C#18	7.4φ-8.2φ	15.9	14.0	14.8	1.9~3.2	
SR-6R1	581 951	SJ, SJT, 3C#16	8.2φ-9.2φ	15.9	14.0	14.8	0.5~1.6	
SR-6R3	963	SJ, SJT, 3C#16	8.2φ-9.2φ	15.9	14.0	14.8	1.9~3.2	
SR-7R1	SJT, 3C#14	9.2φ-10.5φ	19.0	16.5	19.0	0.5~1.6		
		11φ	19.8					
SR-7R3	SJT, 3C#14	9.2φ-10.5φ	19.0	16.5	19.0	1.9~3.2		
		11φ	19.8					
SR-8R3	SJT, 3C#12	12φ-15.2φ	22.2	21.3	20.6	1.9~3.2		
SR-9R1	20~30PCS#18	11φ-15φ	19.0	19.0	17.5	0.5~1.6		
SR-9R7		15.2φ-16.3φ	28.0					
	SJT, 3C#10	17.5φ	30.2	25.5	25.2	1.0~7.2		

**0705A STRAIN RELIEF BUSHING ASSEMBLY TOOL**

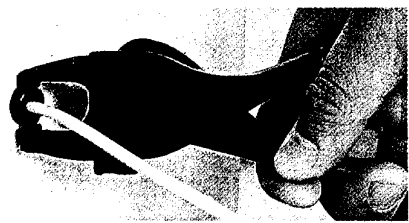

Item No. : KT-1 (STAINLESS)

- Applicable: SR-F21 SR-F23 SR-F31 SR-F32  
 Bushings SR-F41 SR-F42 SR-F51 SR-F53  
 SR-5R1 SR-5R2 SR-6W2 SR-6P1  
 SR-6P3 SR-6R1 SR-6R3 SR-7R1  
 SR-7R3 SR-8R3 SR-9R7

