



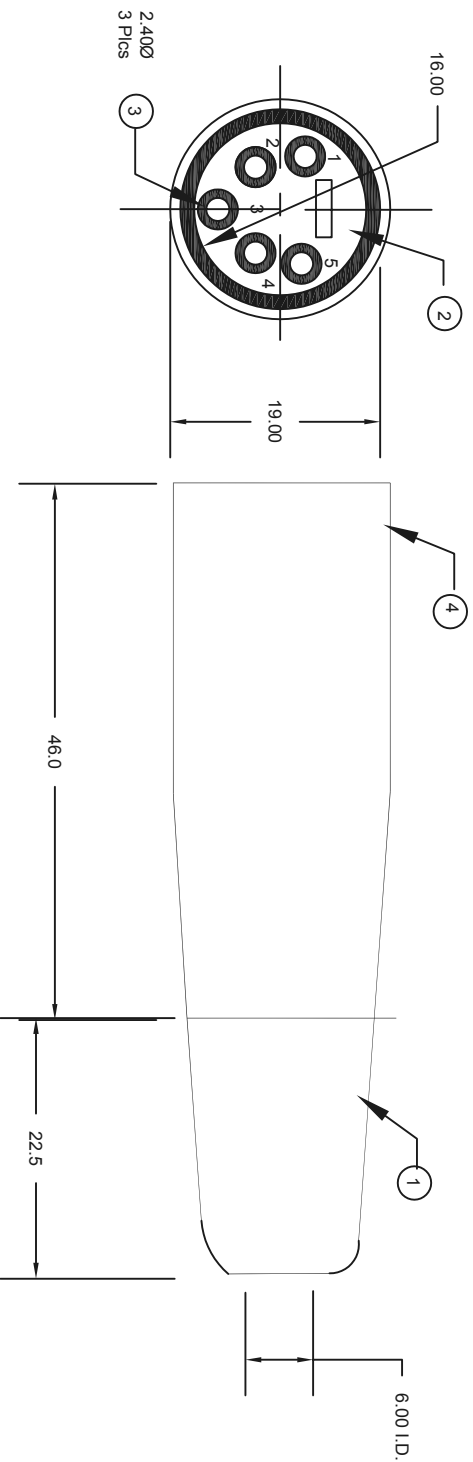

SPC  
TECHNOLOGY

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.  
SPC-F005.DWG

REVISIONS		DOC. NO. SPC-F005	* Effective: 7/8/02	* DCP No: 1398
DCP #	REV	DESCRIPTION	DATE	DATE
			VEE 02-08-10	JAG 03-08-10
			XXX 16-08-10	



Dimensions : Millimetres

**Specifications:**

**Electrical**

- Contact rating : 15A at 125VAC
- Contact resistance : 5milliohms maximum
- Insulation resistance : 5000 Megaohms minimum at 500VDC
- Dielectric strength : 1400VAC
- Capacitance : 7pF maximum

**Mechanical**

- Insertion force : 1.0 to 8.0kg
- Withdrawal force : 1.0 to 8.0kg
- Finish : Brushed

**Environmental**

- Operating temperature : -55°C to 70°C

Item	Description	Qty	Material/Finish
1	Housing	1	Zinc Die Cast, Nickel Plated
2	Insert Insulator	1	PPO-I, UL94V-0 rated, Gray
3	Pins	1	Brass, Silver Plated
4	Cable Relief	1	PVF, Matte Finish

**Part Number Table**

Description	Part Number
Male XLR Type Audio Cord Plug	SPC21419

**TOLERANCES:**

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

**DISCLAIMER:**

ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

**DRAWING TITLE:**

Male XLR Type Audio Cord Plug

DRAWN BY:	DATE:	DRAWING TITLE:	SCALE:	U.O.M.:	SHEET:	OF
VEE	02-08-10	Male XLR Type Audio Cord Plug	NTS	INCHES [mm]	1	1
CHECKED BY:	DATE:	SIZE	DWG. NO.	ELECTRONIC FILE	REV	
JAG	03-08-10	XXX	XXX	84N1095	A	
APPROVED BY:	DATE:					
XXX	16-08-10					