




SPC
TECHNOLOGY

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.
SPC-F005.DWG

REVISONS		DOC. NO. SPC-F005	* Effective: 7/8/02	* DCP No: 1398
DCP #	REV	DESCRIPTION	DRAWN	DATE
			VEE	02-08-10
			JAG	03-08-10
			XXX	16-08-10

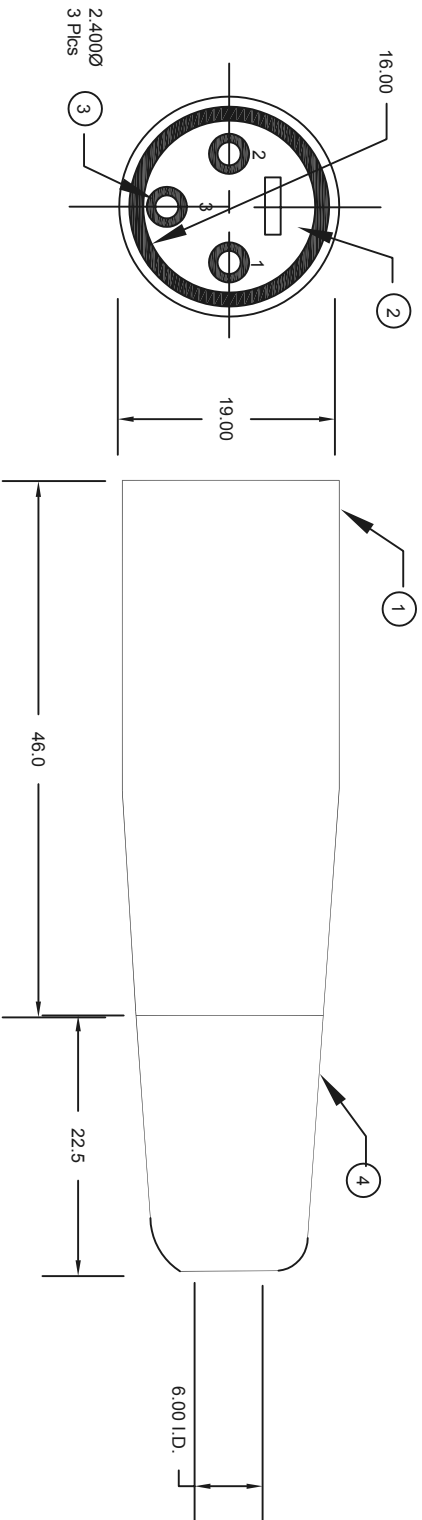

Dimensions : Millimetres

Specifications:

Electrical:

- Contact rating : 15A at 125VAC
- Contact resistance : 5milliohms maximum
- Insulation resistance : 5000 Megohms minimum at 500VDC
- Dielectric strength : 1400VAC
- Capacitance : 4pF maximum

Item	Description	Qty	Material/Finish
1	Housing	1	Zinc Die Cast, Nickel, Black Nickel Plated
2	Insert Insulator	1	PP0-1, UL 94V-0 rated, Gray
3	Pins	1	Brass, Silver Plated
4	Cable Relief	1	PVP, Matte Finish

- Mechanical:**
- Insertion force : 1.0 to 8.0kg
- Withdrawal force : 1.0 to 8.0kg
- Finish : Brushed

Environmental:

- Operating temperature : -55°C to 70°C

Part Number Table

Description	Part Number
3 Pin Male XLR Type Audio Cord Plug	SPC21420

DISCLAIMER:

ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:	DATE:	DRAWING TITLE:	SCALE:	U.O.M.:	SHEET:	OF
VEE	02-08-10	3 Pin Male XLR Type Audio Cord Plug	NTS	INCHES [mm]	1	1
CHECKED BY:	DATE:	SIZE	DWG. NO.	ELECTRONIC FILE	REV	
JAG	03-08-10	XXX	XXX	84N1097	A	
APPROVED BY:	DATE:					
XXX	16-08-10					