



- Designed and manufactured in the UK to the highest quality standards for use with Professional Audio Equipment.
- Solid centre conductor of gold plated machined brass with large solder bucket for easy soldering.
 - Ground contact machined from solid brass with gold plated, unique 'T' shaped slot for effective spring contact pressure.
 - Large crimpable cable clamp for strong and secure cable connection.
 - Solid brass body effectively shrouds connector providing 100% shielding.
 - PTFE insulation for high dielectric constant
 - Spring strain relief.
 - Maximum cable size 5.5mm
 - Attractive styling finished in black chrome with printed colour coding.

Dimensions

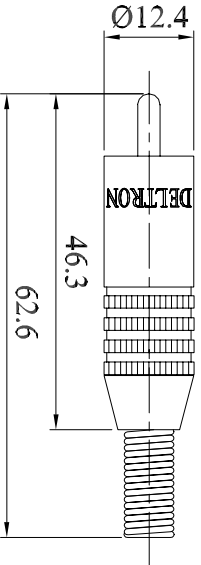

Material	
Centre contact	: Brass, 0.5 micron gold plated
Ground contact	: Brass, 0.5 micron gold plated
Insulation	: PTFE
Cable clamp	: Brass, 0.5 micron gold plated
Spring	: Spring steel, black chrome plated
Cap	: Brass, black chrome plated
Ratings –	
5A at 200 Vdc/150 Vac max.	
Insulation Resistance –	
100M Ω at 500 Vdc	

Deltron Part No.	Description
321-0000	BLACK CHROME CAP & SPRING
321-0500	BLACK CHROME CAP & SPRING (RED COLOUR CODING)
321-0600	BLACK CHROME CAP & SPRING (WHITE COLOUR CODING)

CONVERTED FROM PS0364 ISS3 (05.06.95) IN JAN 2003

DrqNo 321 SERIES TITLE HIGH END PROFESSIONAL PHONO LINE PLUG

ALL DIMENSIONS IN MM
ANGLES IN DECIMAL DEGREES



DELTRON Components

ES 3

GENERAL SPECIFICATION
FOR 321 SERIES

CUSTOMER

Aprvd Date 03/02/03

Aprvd By MC

Drwn by BS

FILTER REF

Scale: NTS

Sheet 1 / 1

© Deltron Emcon Limited E-Mail components@deltron-emcon.com, Website www.deltron-emcon.com, Phone +44 1724 273200 Fax +44 1724 270230

DELTRON Emcon