


A fully screened robust range of DIN connectors for use in instrumentation and audio applications. Available in two finishes; bright nickel and non-reflective electrically conductive matt black. Robust construction incorporating cable grip and strain relief. This line socket mates with all standard and lockable plugs.

Manufactured to DIN 41524, 45322, 45326, 45327 and 45329.

Dimensions

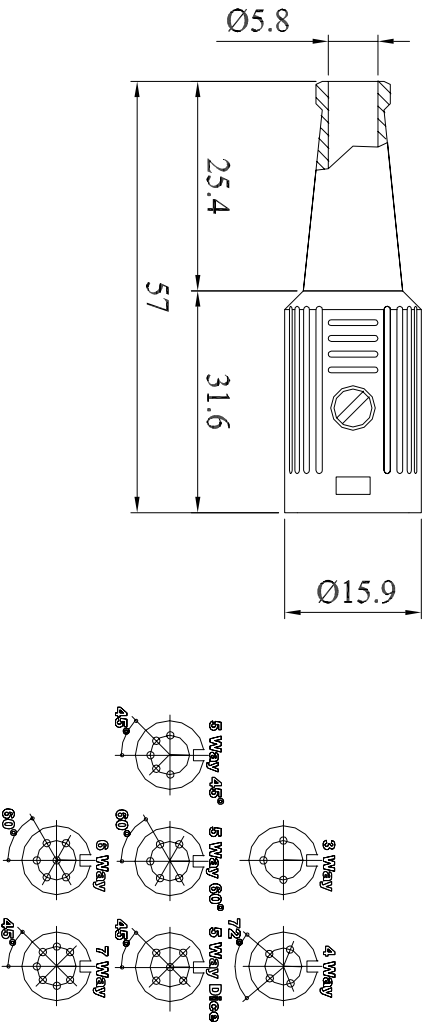

Type	Deltron No
3 Way	600-0300
4 Way	600-0400
5 Way 45°	600-0500
5 Way 60°	600-0510
5 Way Dice	600-0520
6 Way	600-0600
7 Way	600-0700

- MATERIALS**
HOUSING : Zinc Alloy
: heavy nickel plated over copper
- MOULDING**
CONTACTS : Nylon
: Brass
: Silver Plated
- CABLE CLAMP**
: Mild Steel
: zinc plated
: Black P. V. C.
- GROMMET**
- ELECTRICAL RATINGS**
Working Voltage : 100 Vd.c. or a.c. peak
Test Voltage : 1000 Vd.c.
Insulation Resist. : 10¹¹Ω min at 100 Vd.c.
Current Rating : 4 A
Contact Resist. : 10 m Ω max
Capacity (mated) : 3 pF
Temp. Range : -25°C to +70°C


CONVERTED FROM PS0457 ISS4 (19.06.96) IN JAN 2003

DrngNo 600 SERIES TITLE SCREENED DIN CONNECTOR LINE SOCKET (NICKEL) ALL DIMENSIONS IN MM

DELTRON Components  **ES 55 4** GENERAL SPECIFICATION FOR 600 SERIES CUSTOMER FILTER REF

Deltron Emcon Limited E-Mail components@deltron-emcon.com, Website www.deltron-emcon.com, Phone +44 1724 273200 Fax +44 1724 270230

Aprvd Date 10/02/03 Aprvd By MC Drwn by BFS Scale: NTS Sheet 1 / 1

DELTRON  **Emcon**