


A fully screened robust range of DIN connectors for use in instrumentation and audio applications. Available in two finishes; bright nickel and non-reflective electrically conductive matt black. Robust construction incorporating cable grip and strain relief.

Manufactured to DIN 41524, 45322, 45326, 45327 and 45329.

Dimensions

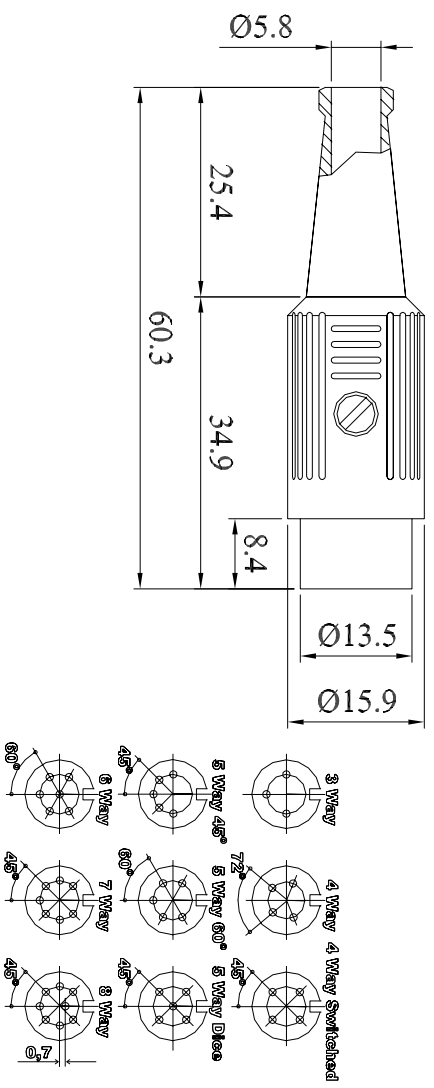

Type	Deltron No
3 Way	611-0300
4 Way	611-0400
4 Way Switched	611-0410
5 Way 45°	611-0500
5 Way 60°	611-0510
5 Way Dice	611-0520
6 Way	611-0600
7 Way	611-0700
8 Way	611-0800

- MATERIALS** : Zinc Alloy
- HOUSING** : Sprayed with matt black
- MOULDING** : Nylon
- CONTACTS** : Brass
- CABLE CLAMP** : Silver Plated
- GROMMET** : Mild Steel
- : zinc plated
- : Black P.V.C.

- ELECTRICAL RATINGS**
- Working Voltage : 100 V.d.c. or a.c. peak
- Test Voltage : 1000 V.d.c.
- Insulation Resist. : 10¹¹Ω min at 100 V.d.c.
- Current Rating : 4 A
- Contact Resist. : 10 mΩ max
- Capacity (mated) : 3 pF
- Temp. Range : -25°C to +70°C

CONVERTED FROM PS0487 ISS3 (08.07.96) IN JAN 2003

DrngNo 611 SERIES TITLE SCREENED DIN CONNECTOR STANDARD PLUG (BLACK) ALL DIMENSIONS IN MM

DELTRON Components **3** GENERAL SPECIFICATION FOR 611 SERIES

CUSTOMER: Aprvd Date 10/02/03 Aprvd By MC Drwn by BFS FILTER REF: Scale: NTS Sheet 1 / 1