


DIN Connectors


The **CLIFF**[®] range of PCB mounting DIN Connectors comprises several models incorporating a tough plastic body with nickel silver and tin plated brass contacts. Models are available in either 3, 5, 6, 7 and 8 pin versions and are intended for use in many types of consumer and professional audio equipment including MIDI. We also offer a range of molded DIN Leads. Contact our sales office for more details on these products.



Downloaded from Elcodis.com electronic components distributor

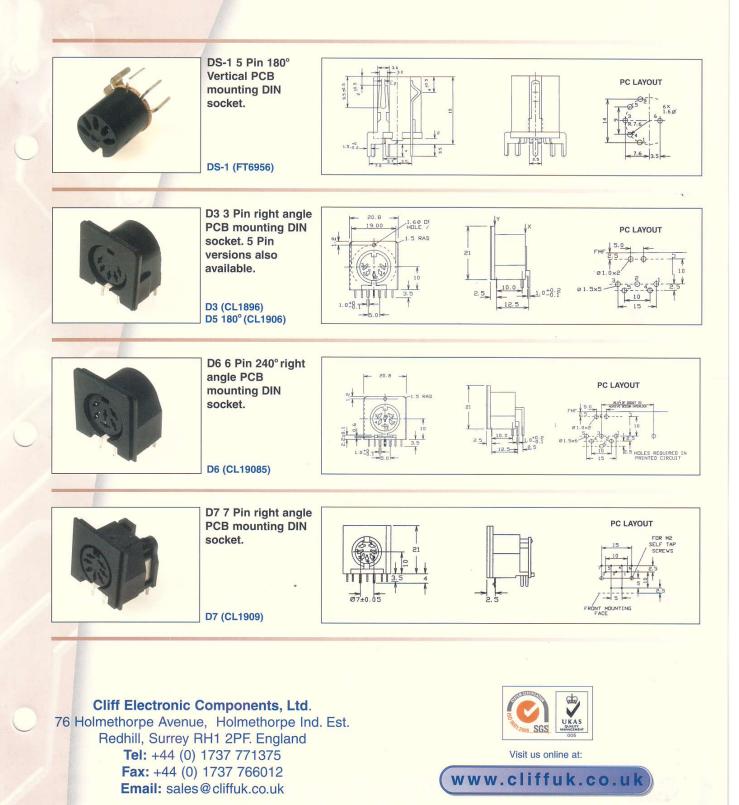

DIN Connectors

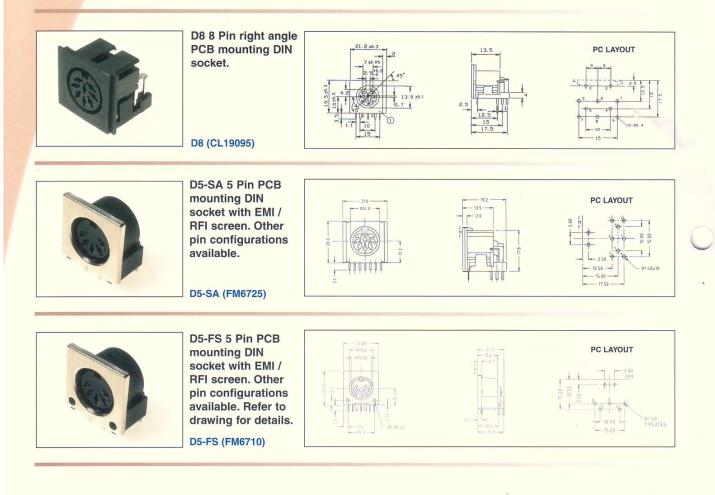

Electrical Specifications:	Rated Current: 4A. Rated Voltage: For Low Voltage use to 34Vac max. Operating Temperature: -20 to 70°C.
	Contact Resistance (new): <5mΩ. (mated)
	Contact Resistance (after 1000 insertions): 15mΩ. max.
Mechanical Specifications:	Insertion Life (Minimum): >1000 insertions and removals
	Insertion Force: <10N
Materials:	ABS, Nylon or PBT. See individual drawings for details.
	Contacts: Brass
	Plating: SnPb or Tin plated. See individual drawings for details.
	EMI/RFI Screen: Stainless Steel.

Drawings available on request. Contact sales@cliffuk.co.uk

2003 CLIFF®