



SPC
TECHNOLOGY

ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.
SPC-F005.DWG

REVISIONS

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
			ASH	16-08-10	Joggn	19-08-10	XXX	30-08-10

DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398



Specifications:

Electrical:


Contact Rating: 15A at 125 VAC
Contact Resistance: 5 milliohms maximum
Insulation Resistance: 5000 Megohms minimum at 500 VDC
Dielectric Strength: 1400 VAC
Capacitance: 4pF maximum

Mechanical:

Insertion Force: 1.0 to 8.0 Kg
Withdrawal Force: 1.0 to 8.0 Kg

Environmental Specifications:

Operating Temperature: -55°C to 70°C
Item Part Material/Finish: 1 Housing Material/Finish
2 Insert Insulator: PPO-1, UL94V-0, Gray 3 Pin: Brass, Silver Plated

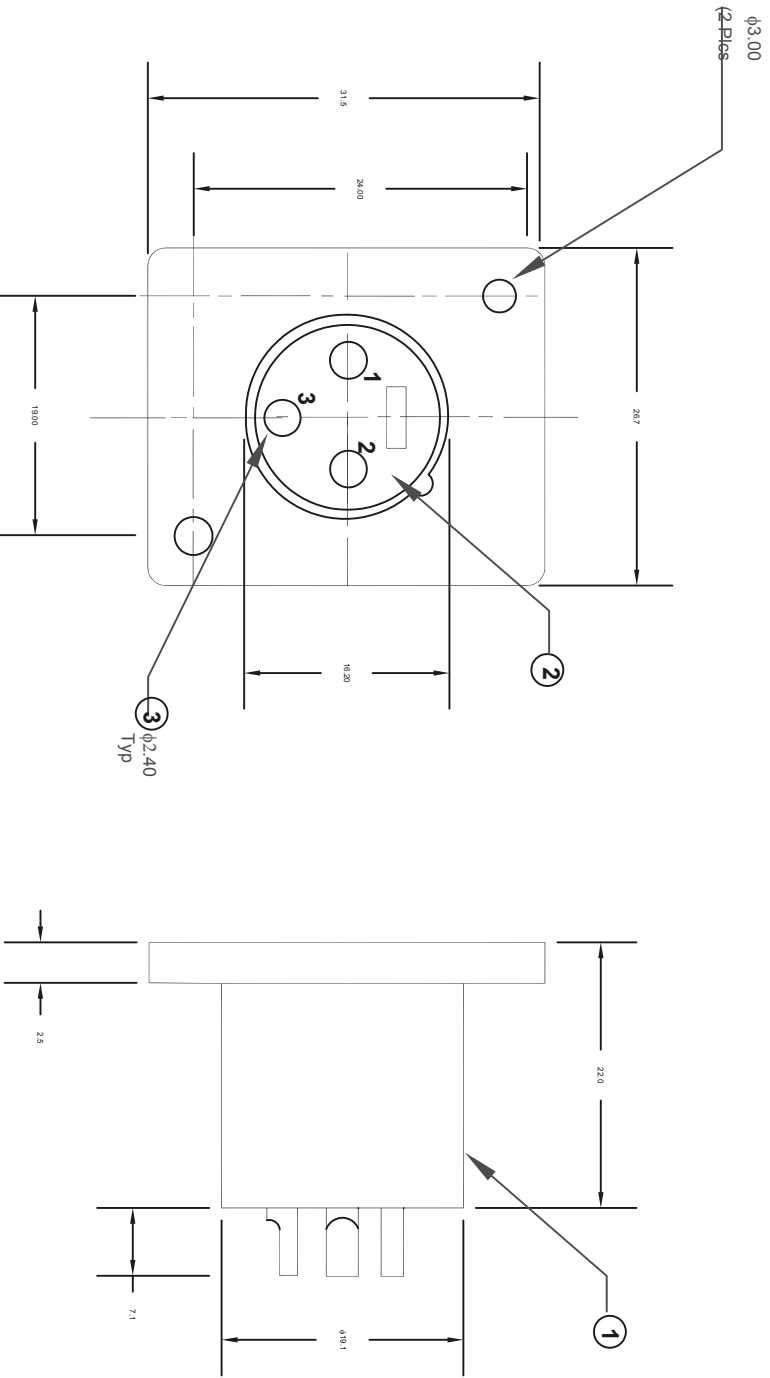

Dimensions : Inches

Part Number Table

Description	Part Number
Male XLR Type Audio Receptacle	SPC21433

DISCLAIMER:

ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:

ASH

DATE:

16-08-10

CHECKED BY:

JAG

DATE:

17-08-10

APPROVED BY:

XXX

DRAWING TITLE:

Male XLR Type Audio Receptacle

SIZE

XXX

DWG. NO.

XXX

ELECTRONIC FILE

84N1111

REV

A

SCALE:

NTS

U.O.M.: INCHES [mm]

SHEET:

1 OF 1