Ultra-compact Surface Mount Remote Control Photoreceiver Module RPMS1401-H19

Outline


ROHM's RPMS1401-H19 photoreceiver, utilizing original miniaturization technology, features the smallest* mounting area in the world. In addition, the S/N ratio in broad daylight is significantly improved due to ROHM's unique optical technology.

Applications

All types of portable devices, including digital still and video cameras, car navigation equipment, laptops, and gaming consoles

Features

- 1) Smallest mounting area in the world (9mm²)
- 2) Resistant to sunlight noise
- 3) Low power consumption: $300\mu A$ (in standby mode)

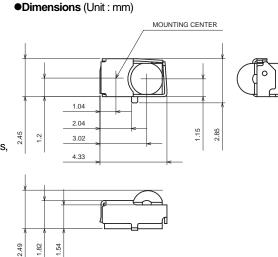

•Absolute maximum ratings (Ta = 25°C)

Parameter	Symbol	Limits	Unit	Conditions
Supply Voltage	Vcc	6.3	V	
Output Current	lo	2.0	mA	
Storage temperature	Tstg	-40 to +100	°C	
Operating temperature	Topr	-40 to +85	°C	No condensation

* Jan.07 ROHM study

ROHM

Photo Link Module

•Electrical, Optical characteristics (Ta = 25° C)

Recommended operating conditions							
Parameter	Symbol	Min.	Тур.	Max.	Unit		
Supply voltage	Vcc	2.7	3.0	3.6	V		

Characteristics


Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions
Consumption Current	lcc	-	300	500	μΑ	No outside light, No signal input
Effective Distance	L	5	8	-	m	*1 Outer light condition Ee<10 (Ix)
High Level Output Voltage	Vн	2.5	_	-	V	*1
Low Level Output Voltage	VL	-	_	0.5	V	*1 I sink 200μA
ON Pulse Width	Ton	400	600	800	μs	*1 Outer light condition Ee<10 (Ix)
OFF Pulse Width	Toff	400	600	800	μs	*1 Outer light condition Ee<10 (Ix)
Center frequency	fo	-	40.0	-	kHz	
Horizontal half angle	θ1/2	-	34	-	deg	*2
Vertical half angle	θ1/2	-	32	-	deg	*2

 $\ast 1~600/600 \mu s$ burst wave is transmitted by standard transmitter.

However, it must be measured after the initial transmission pulse is 10 pulse.

 $\ast 2~$ It is an angle when the linear arrival distance become half.

rohm

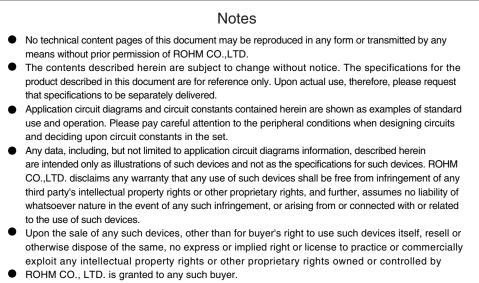

• Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

It is our top priority to supply products with the utmost quality and reliability. However, there is always a chance of failure due to unexpected factors. Therefore, please take into account the derating characteristics and allow for sufficient safety features, such as extra margin, anti-flammability, and fail-safe measures when designing in order to prevent possible accidents that may result in bodily harm or fire caused by component failure. ROHM cannot be held responsible for any damages arising from the use of the products under conditions out of the range of the specifications or due to non-compliance with the NOTES specified in this catalog.

Thank you for your accessing to ROHM product informations. More detail product informations and catalogs are available, please contact your nearest sales office.

ROHM Customer Support System

THE AMERICAS / EUROPE / ASIA / JAPAN

www.rohm.com

Contact us : webmaster@rohm.co.jp

Copyright © 2007 ROHM CO.,LTD. ROHM CO., LTD. 21, Saiin Mizosaki-cho, Ukyo-ku, Kyoto 615-8585, Japan TEL:+81-75-311-2121 FAX:+81-75-315-0172

ROHM

Appendix1-Rev2.0