






Feed through terminal blocks

Screw clamp to quick-connect, DIN 1-3

Quick connect



M 4/6.2G - 4 mm² blocks - 6 mm .236" spacing

Characteristics

		IEC NFC DIN	UL	CSA
Wire size (Screw clamp) mm ² / AWG	Solid	0.5 - 4 mm ²	22-10 AWG	24-12 AWG
	Stranded	0.5 - 4 mm ²		
Wire size (quick-connect) mm ² / AWG	Quick-connect	2.8 x 0.8 mm series 110 - 1.5 mm ² max. 6.3 x 0.8 mm series 250 - 2.5 mm ² max.		
		Voltage		
Voltage	V	750 V Gr.C	600	300
Current	A	25	20	25
Rated wire size	mm ² / AWG	4 mm ²	10 AWG	12 AWG
Wire stripping length	mm / inches	9.5 mm / .374"		
Recommended torque	Nm / lb.in	0.4-0.6 Nm / 3.5-5.3 lb.in		





Selection

Description	Type	Order P/N	Packaging
Terminal block with partition. Output : Screw clamp to horizontal quick connect tabs			
grey	<input type="checkbox"/> M 4/6.2G	0115 189.11	50
blue	<input type="checkbox"/> M 4/6.2G.N	0125 189.13	50
beige V0	<input type="checkbox"/> M 4/6.2G.V0	0195 189.12	50

Accessories

End stop		BAM2	9.9 mm	0206 351.16	50
End section	grey	<input type="checkbox"/> FEM6G	2.5 mm	0113 027.07	20
	blue	<input type="checkbox"/> FEM6G	2.5 mm	0123 027.01	10
	beige V0	<input type="checkbox"/> FEM6G	2.5 mm	0193 027.00	20
Separator end section	grey	<input type="checkbox"/> SCF6G	3 mm	0113 075.17	20
Assembled jumper bar (with IP20 protection)	2 poles	BJMI6	32 A	0176 663.00	10
	3 poles	BJMI6	32 A	0176 664.01	10
	4 poles	BJMI6	32 A	0176 665.02	10
	5 poles	BJMI6	32 A	0176 666.03	10
	10 poles	BJMI6	32 A	0176 667.04	10
Shield connector		CBM5	0.5 mm	0178 745.14	50
		CBM8	0.8 mm	0178 746.15	50

M 4/6.3G - 4 mm² blocks - 6 mm .236" spacing



Characteristics

		NFC DIN	UL	CSA
Wire size (Screw clamp) mm ² / AWG	Solid	0.2 - 4 mm ²	—	20-12 AWG
	Stranded	0.22 - 4 mm ²		
Wire size (quick-connect) mm ² / AWG	Quick-connect	2.8 x 0.8 mm series 110 - 1.5 mm ² max. 6.3 x 0.8 mm series 250 - 2.5 mm ² max.		
		Voltage		
Voltage	V	500 V Gr.C	—	300
Current	A	25	—	25
Rated wire size	mm ² / AWG	4 mm ²	—	12 AWG
Wire stripping length	mm / inches	9.5 mm / .374"		
Recommended torque	Nm / lb.in	0.5-0.8 Nm / 4.4-7.1 lb.in		

Selection

Description	Type	Order P/N	Packaging
Terminal block with partition. Output : Screw clamp - vertical quick-connect tabs to vertical quick-connect tabs			
grey	<input type="checkbox"/> M 4/6.3G	0115 279.02	50


Accessories

End stop	grey	BAM2	9.9 mm	0206 351.16	50
End section	grey	<input type="checkbox"/> FEMG	1.5 mm	0114 144.12	25
Assembled jumper bar (with IP20 protection)	2 poles	BJMI6	32 A	0176 663.00	10
	3 poles	BJMI6	32 A	0176 664.01	10
	4 poles	BJMI6	32 A	0176 665.02	10
	5 poles	BJMI6	32 A	0176 666.03	10
	10 poles	BJMI6	32 A	0176 667.04	10


6

Quick-connect terminal blocks

Quick-connect to quick-connect, DIN 1-3



M 2,5/6.2G.2G

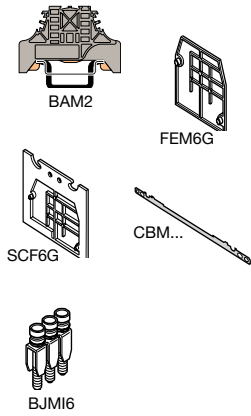

M 2,5/6.2G.2G - 2,5 mm² blocks - 6 mm .236" spacing

Characteristics

		IEC NFC DIN	UL	CSA
Wire size mm ² / AWG	Quick-connect	2.8 x 0.8 mm series 110 - 1.5 mm ² max. 6.3 x 0.8 mm series 250 - 2.5 mm ² max.		
Voltage	V	630	600	300
Current	A	20	25	20
Rated wire size	mm ² / AWG	2.5 mm ²	10 AWG	12 AWG

Selection

Description	Type	Order P/N	Packaging
Standard block, outputs : horizontal quick-connect tabs to horizontal quick-connect tabs	grey <input type="checkbox"/> M 2,5/6.2G.2G beige V0 <input type="checkbox"/> M 2,5/6.2G.2G.V0	0115 191.03 0195 191.04	50 50

Accessories

End stop	grey	BAM2	9.9 mm	0206 351.16	50
End section	grey <input type="checkbox"/>	FEM6G	2.5 mm	0113 027.07	20
	beige V0 <input type="checkbox"/>	FEM6G	2.5 mm	0193 027.00	20
Separator end section	grey <input type="checkbox"/>	SCF6G	3 mm	0113 075.17	20
	grey V0 <input type="checkbox"/>	SCF6G	3 mm	0193 075.10	20
Assembled jumper bar (with IP20 protection)	2 poles	BJMI6	32 A	0176 663.00	10
	3 poles	BJMI6	32 A	0176 664.01	10
	4 poles	BJMI6	32 A	0176 665.02	10
	5 poles	BJMI6	32 A	0176 666.03	10
	10 poles	BJMI6	32 A	0176 667.04	10
Shield connector		CBM5	0.5 mm	0178 745.14	50
		CBM8	0.8 mm	0178 746.15	50

M 2,5/6.4G.1 - 2,5 mm² blocks - 6 mm .236" spacing

Characteristics


		IEC NFC DIN	UL	CSA
Wire size mm ² / AWG	Quick-connect	2.8 x 0.8 mm series 110 - 1.5 mm ² max. 6.3 x 0.8 mm series 250 - 2.5 mm ² max.		
Voltage	V	630	600	300
Current	A	35	25	25
Rated wire size	mm ² / AWG	2.5 mm ²	10 AWG	12 AWG

Selection

Description	Type	Order P/N	Packaging
Terminal block with partition. Output : vertical quick-connect tabs to vertical quick-connect tabs	grey <input type="checkbox"/> M 2,5/6.4G.1	0115 280.20	50

Accessories

End stop	grey	BAM2	9.9 mm	0206 635.16	50
End section	grey <input type="checkbox"/>	FEMG	1,5 mm	0114 144.12	25
Assembled jumper bar (with IP20 protection)	2 poles	BJMI6	32 A	0176 663.00	10
	3 poles	BJMI6	32 A	0176 664.01	10
	4 poles	BJMI6	32 A	0176 665.02	10
	5 poles	BJMI6	32 A	0176 666.03	10
	10 poles	BJMI6	32 A	0176 667.04	10



M 2,5/6.4G.1

