

LM431

Adjustable Precision Zener Shunt Regulator

General Description


The LM431 is a 3-terminal adjustable shunt regulator with guaranteed temperature stability over the entire temperature range of operation. It is now available in a chip sized package (4-Bump micro SMD) using National's micro SMD package technology. The output voltage may be set at any level greater than 2.5V (V_{REF}) up to 36V merely by selecting two external resistors that act as a voltage divided network. Due to the sharp turn-on characteristics this device is an excellent replacement for many zener diode applications.

Features

- Average temperature coefficient 50 ppm/ $^{\circ}\text{C}$
- Temperature compensated for operation over the full temperature range
- Programmable output voltage
- Fast turn-on response
- Low output noise
- LM431 in micro SMD package
- See AN-1112 for micro SMD considerations


Connection Diagrams

TO-92: Plastic Package

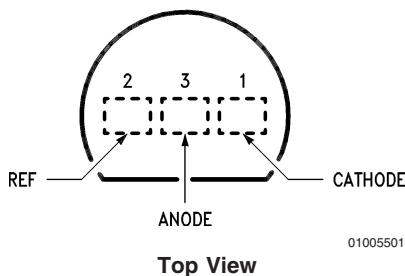

01005501


SOT-23: 3-Lead Small Outline

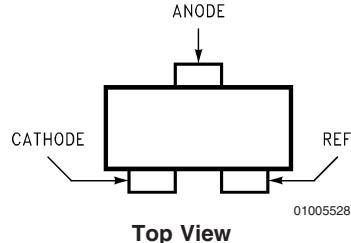

01005528

Top View


SO-8: 8-Pin Surface Mount

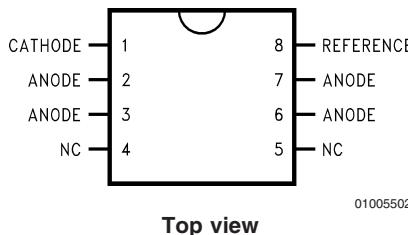

01005502

Top view

4-Bump micro SMD

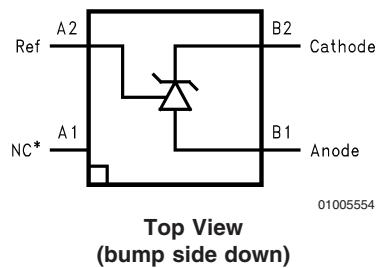

01005554

**Top View
(bump side down)**


Note: *NC = Not internally connected. Must be electrically isolated from the rest of the circuit for the microSMD package.

Ordering Information



Package	Typical Accuracy Order Number/Package Marking			Temperature Range	Transport Media	NSC Drawing
	0.5%	1%	2%			
TO-92	LM431CCZ/ LM431CCZ	LM431BCZ/ LM431BCZ	LM431ACZ/ LM431ACZ	0°C to +70°C	Rails	Z03A
	LM431CIZ/ LM431CIZ	LM431BIZ/ LM431BIZ	LM431AIZ/ LM431AIZ	-40°C to +85°C		
SO-8	LM431CCM/ 431CCM	LM431BCM/ 431BCM	LM431ACM/ LM431ACM	0°C to +70°C	Rails	M08A
	LM431CCMX/ 431CCM	LM431BCMX/ 431BCM	LM431ACMX/ LM431ACM		Tape & Reel	
	LM431CIM/ 431CIM	LM431BIM/ 431BIM	LM431AIM/ LM431AIM	-40°C to +85°C	Rails	
	LM431CIMX/ 431CIM	LM431BIMX/ 431BIM	LM431AIMX/ LM431AIM		Tape & Reel	
SOT-23	LM431CCM3/ N1B	LM431BCM3/ N1D	LM431ACM3/ N1F	0°C to +70°C	Rails	MF03A
	LM431CCM3X/ N1B	LM431BCM3X/ N1D	LM431ACM3X/ N1F		Tape & Reel	
	LM431CIM3 N1A	LM431BIM3 N1C	LM431AIM3 N1E	-40°C to +85°C	Rails	
	LM431CIM3X N1A	LM431BIM3X N1C	LM431AIM3X N1E		Tape & Reel	
micro SMD	–	–	LM431AIBP LM431AIBPX (Note 1)	-40°C to +85°C	250 Units Tape and Reel 3k Units Tape and Reel	BPA04AFB

Note 1: The micro SMD package marking is a 1 digit manufacturing Date Code only

micro SMD Top View Marking Example



Symbol and Functional Diagrams

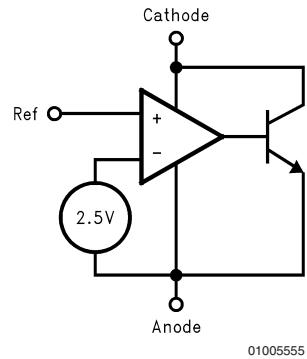

DC Test Circuits



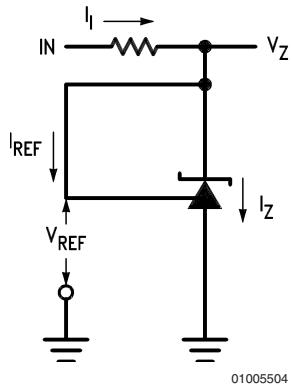


FIGURE 1. Test Circuit for $V_Z = V_{REF}$

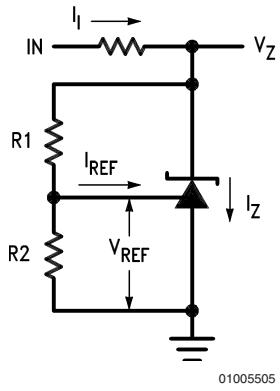

Note: $V_Z = V_{REF} \left(1 + \frac{R1}{R2} \right) + I_{REF} \cdot R1$

FIGURE 2. Test Circuit for $V_Z > V_{REF}$



Test Circuit for Off-State Current

Absolute Maximum Ratings (Note 2)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature Range	-65°C to +150°C	Reference Voltage	-0.5V		
Operating Temperature Range		Reference Input Current	10 mA		
Industrial (LM431xI)	-40°C to +85°C	Internal Power Dissipation (Notes 3, 4)			
Commercial (LM431xC)	0°C to +70°C	TO-92 Package	0.78W		
Soldering Information		SO-8 Package	0.81W		
Infrared or Convection (20 sec.)	235°C	SOT-23 Package	0.28W		
Wave Soldering (10 sec.)	260°C (lead temp.)	micro SMD Package	0.30W		
Cathode Voltage	37V	Operating Conditions			
Continuous Cathode Current	-10 mA to +150 mA	Cathode Voltage	Min	Typ	Max
		Cathode Current	1.0 mA	100 mA	

LM431 Electrical Characteristics

T_A = 25°C unless otherwise specified

Symbol	Parameter	Conditions		Min	Typ	Max	Units
V _{REF}	Reference Voltage	V _Z = V _{REF} , I _I = 10 mA LM431A (<i>Figure 1</i>)		2.440	2.495	2.550	V
		V _Z = V _{REF} , I _I = 10 mA LM431B (<i>Figure 1</i>)		2.470	2.495	2.520	V
		V _Z = V _{REF} , I _I = 10 mA LM431C (<i>Figure 1</i>)		2.485	2.500	2.510	V
V _{DEV}	Deviation of Reference Input Voltage Over Temperature (Note 5)	V _Z = V _{REF} , I _I = 10 mA, T _A = Full Range (<i>Figure 1</i>)			8.0	17	mV
$\frac{\Delta V_{REF}}{\Delta V_Z}$	Ratio of the Change in Reference Voltage to the Change in Cathode Voltage	I _Z = 10 mA	V _Z from V _{REF} to 10V		-1.4	-2.7	mV/V
		(<i>Figure 2</i>)			-1.0	-2.0	
I _{REF}	Reference Input Current	R ₁ = 10 kΩ, R ₂ = ∞, I _I = 10 mA (<i>Figure 2</i>)			2.0	4.0	μA
$\propto I_{REF}$	Deviation of Reference Input Current over Temperature	R ₁ = 10 kΩ, R ₂ = ∞, I _I = 10 mA, T _A = Full Range (<i>Figure 2</i>)			0.4	1.2	μA
I _{Z(MIN)}	Minimum Cathode Current for Regulation	V _Z = V _{REF} (<i>Figure 1</i>)			0.4	1.0	mA
I _{Z(OFF)}	Off-State Current	V _Z = 36V, V _{REF} = 0V (<i>Figure *NO TARGET FOR f_i*</i>)			0.3	1.0	μA
r _Z	Dynamic Output Impedance (Note 6)	V _Z = V _{REF} , LM431A, Frequency = 0 Hz (<i>Figure 1</i>)				0.75	Ω
		V _Z = V _{REF} , LM431B, LM431C Frequency = 0 Hz (<i>Figure 1</i>)				0.50	Ω

Note 2: Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Electrical specifications do not apply when operating the device beyond its rated operating conditions.


Note 3: T_{J Max} = 150°C.

Note 4: Ratings apply to ambient temperature at 25°C. Above this temperature, derate the TO-92 at 6.2 mW/°C, the SO-8 at 6.5 mW/°C, the SOT-23 at 2.2 mW/°C and the micro SMD at 3mW/°C.

Note 5: Deviation of reference input voltage, V_{DEV}, is defined as the maximum variation of the reference input voltage over the full temperature range.

LM431

Electrical Characteristics (Continued)

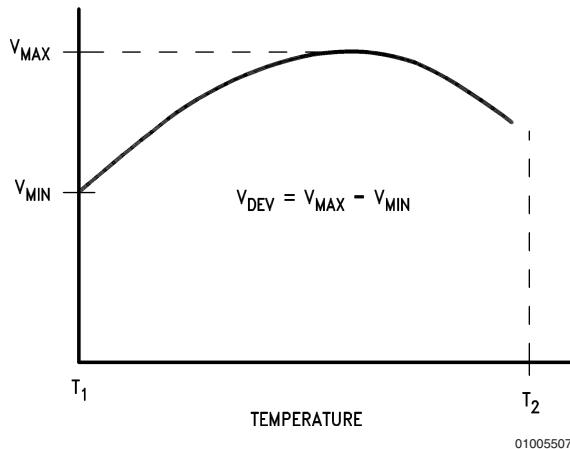

The average temperature coefficient of the reference input voltage, $\approx V_{REF}$, is defined as:

$$\approx V_{REF} \frac{\text{ppm}}{\text{°C}} = \frac{\pm \left[\frac{V_{MAX} - V_{MIN}}{V_{REF} (\text{at } 25\text{°C})} \right] 10^6}{T_2 - T_1} = \frac{\pm \left[\frac{V_{DEV}}{V_{REF} (\text{at } 25\text{°C})} \right] 10^6}{T_2 - T_1}$$

Where:

$T_2 - T_1$ = full temperature change (0-70°C).

$\approx V_{REF}$ can be positive or negative depending on whether the slope is positive or negative.

Example: $V_{DEV} = 8.0 \text{ mV}$, $V_{REF} = 2495 \text{ mV}$, $T_2 - T_1 = 70^\circ\text{C}$, slope is positive.

$$\approx V_{REF} = \frac{\left[\frac{8.0 \text{ mV}}{2495 \text{ mV}} \right] 10^6}{70^\circ\text{C}} = +46 \text{ ppm/}^\circ\text{C}$$


Note 6: The dynamic output impedance, r_Z , is defined as:

$$r_Z = \frac{\Delta V_Z}{\Delta I_Z}$$





When the device is programmed with two external resistors, R1 and R2, (see *Figure 2*), the dynamic output impedance of the overall circuit, r_Z , is defined as:

$$r_Z = \frac{\Delta V_Z}{\Delta I_Z} \approx \left[r_Z \left(1 + \frac{R1}{R2} \right) \right]$$

Equivalent Circuit

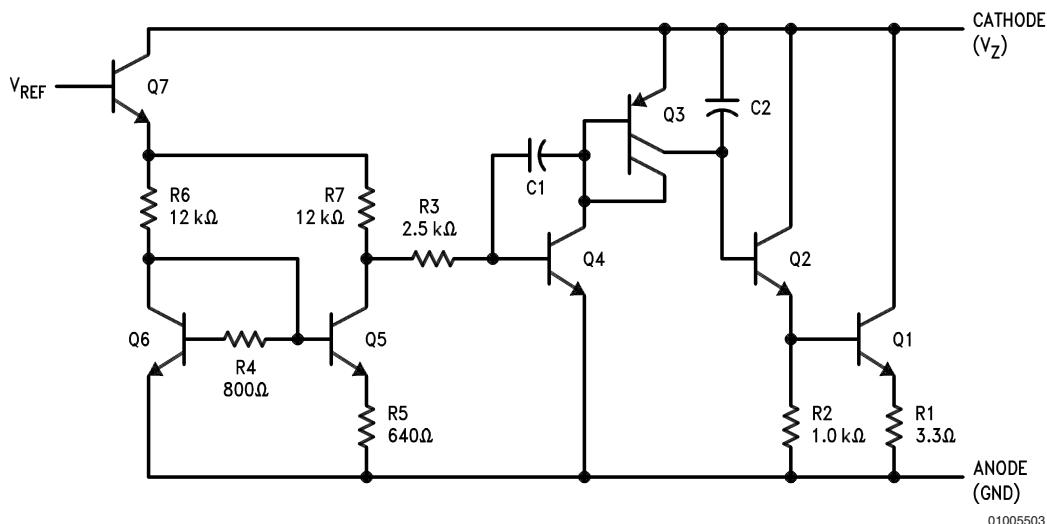


Typical Performance Characteristics

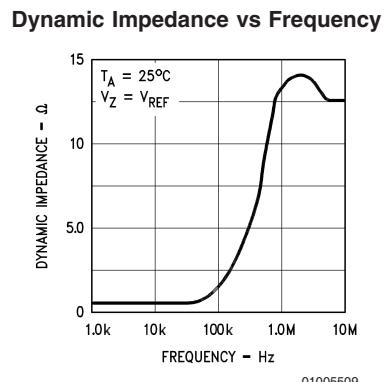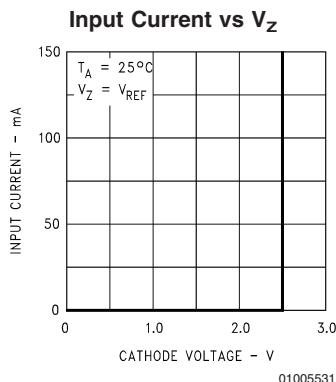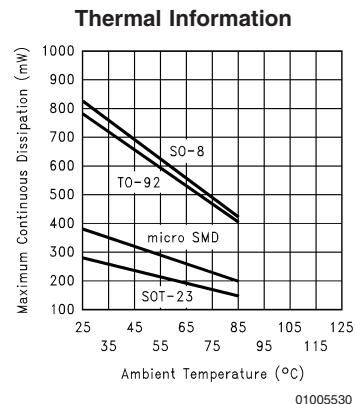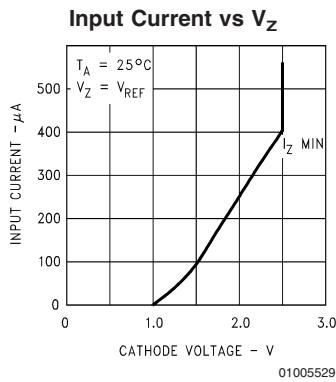


Typical Performance Characteristics (Continued)

Stability Boundary Conditions

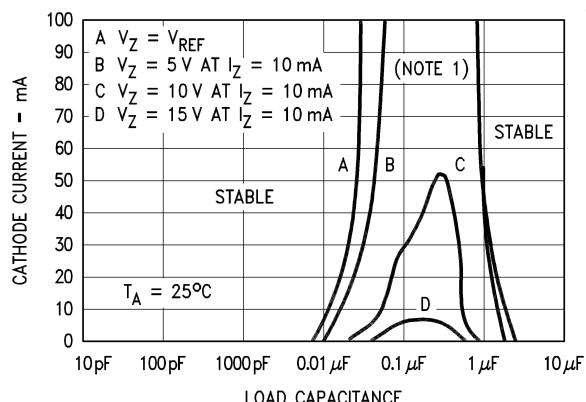


Note: The areas under the curves represent conditions that may cause the device to oscillate. For curves B, C, and D, R_2 and V^+ were adjusted to establish the initial V_Z and I_Z conditions with $C_L = 0$. V^+ and C_L were then adjusted to determine the ranges of stability.




01005510

Test Circuit for Curve A Above

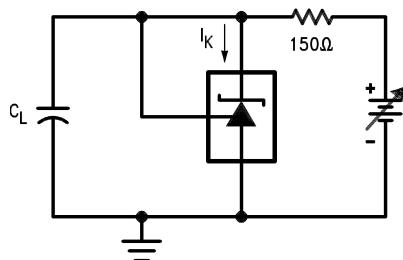

01005512


Test Circuit for Curves B, C and D Above

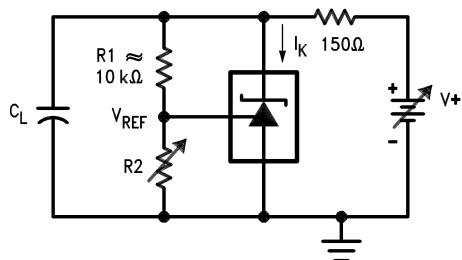

01005513

Typical Applications


Shunt Regulator

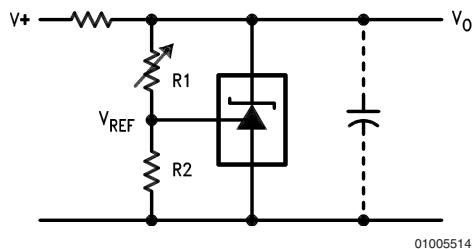

01005514

$$V_0 \approx \left(1 + \frac{R_1}{R_2}\right) V_{REF}$$


Single Supply Comparator with Temperature Compensated Threshold



01005515


Typical Applications (Continued)

Series Regulator

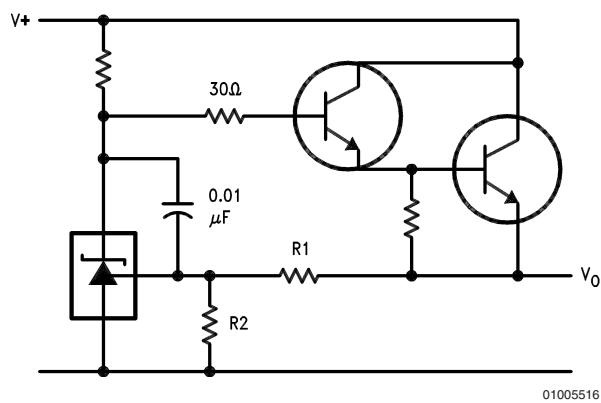

$$V_O \approx \left(1 + \frac{R_1}{R_2}\right) V_{REF}$$


Output Control of a Three Terminal Fixed Regulator

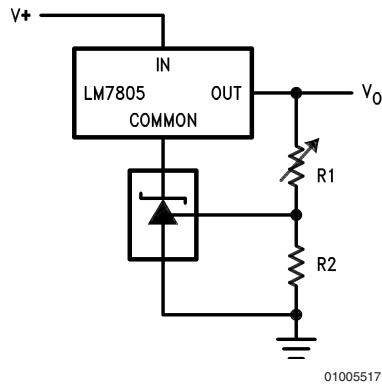

$$V_O = \left(1 + \frac{R_1}{R_2}\right) V_{REF}$$


$$V_{O\ MIN} = V_{REF} + 5V$$

Higher Current Shunt Regulator

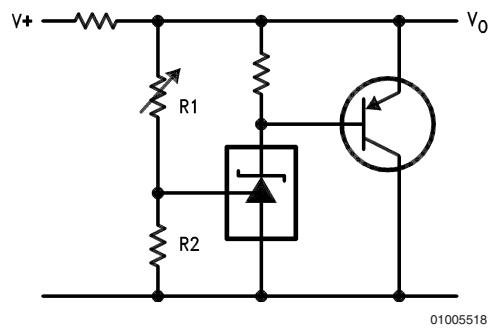

$$V_O \approx \left(1 + \frac{R_1}{R_2}\right) V_{REF}$$


Crow Bar

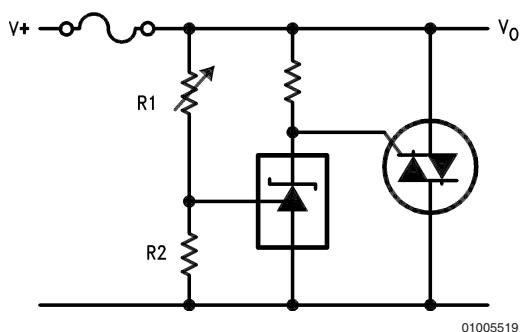

$$V_{LIMIT} \approx \left(1 + \frac{R_1}{R_2}\right) V_{REF}$$

Typical Applications (Continued)


Over Voltage/Under Voltage Protection Circuit

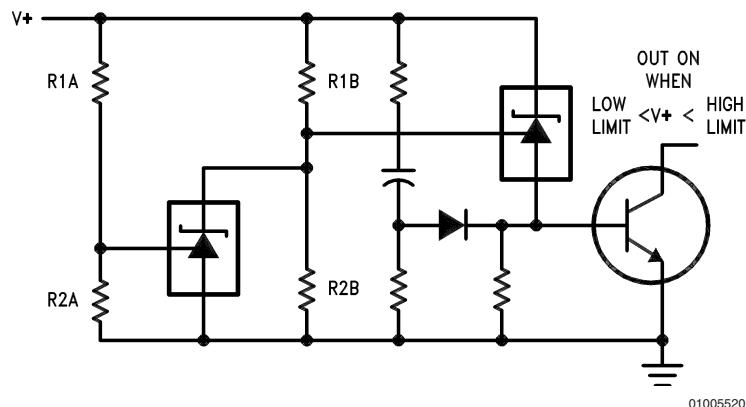

$$\text{LOW LIMIT} \approx V_{\text{REF}} \left(1 + \frac{R_{1B}}{R_{2B}} \right) + V_{BE}$$

$$\text{HIGH LIMIT} \approx V_{\text{REF}} \left(1 + \frac{R_{1A}}{R_{2A}} \right)$$


Voltage Monitor

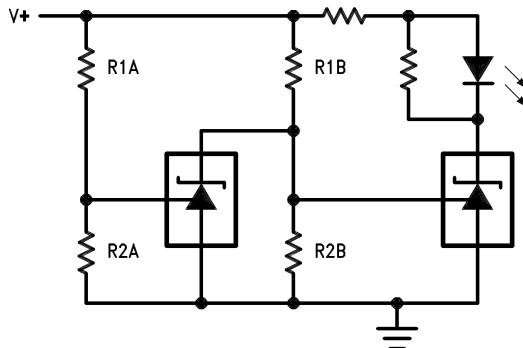

$$\text{LOW LIMIT} \approx V_{\text{REF}} \left(1 + \frac{R_{1B}}{R_{2B}} \right) \quad \text{LED ON WHEN LOW LIMIT} < V^+ < \text{HIGH LIMIT}$$

$$\text{HIGH LIMIT} \approx V_{\text{REF}} \left(1 + \frac{R_{1A}}{R_{2A}} \right)$$


Typical Applications (Continued)

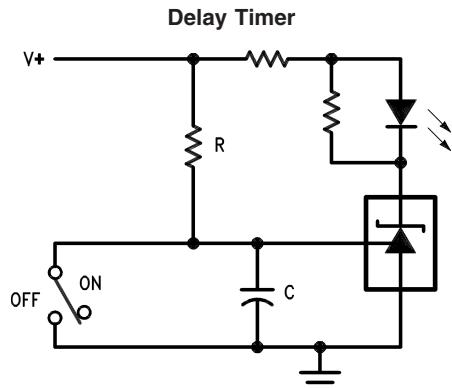

01005522

$$\text{DELAY} = R \cdot C \cdot \ln \frac{V_+}{(V_+) - V_{\text{REF}}}$$


Current Limiter or Current Source

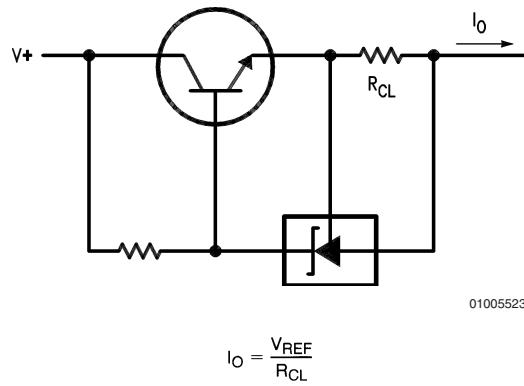

01005523

$$I_O = \frac{V_{\text{REF}}}{R_{\text{CL}}}$$

Constant Current Sink

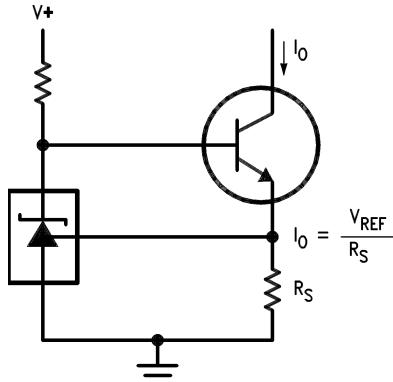

01005524

Application Info


1.0 Mounting

To ensure that the geometry of the micro SMD package maintains good physical contact with the printed circuit board, pin A1 (NC) must be soldered to the PCB. Please see AN-1112 for more detailed information regarding board mounting techniques for the micro SMD package.

2.0 LM431 micro SMD Light Sensitivity

When the LM431 micro SMD package is exposed to bright sunlight, normal office fluorescent light, and other LED's and lasers, it operates within the guaranteed limits specified in the electrical characteristics table.


Physical Dimensions inches (millimeters) unless otherwise noted

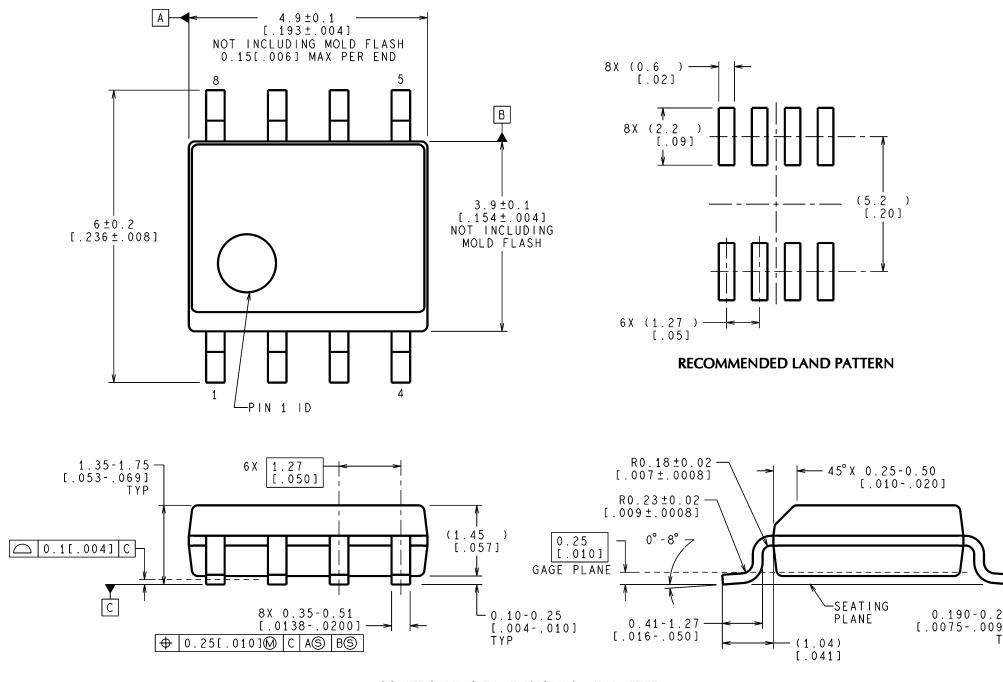

CONTROLLING DIMENSION IS MILLIMETER
VALUES IN [] ARE INCHES
DIMENSIONS IN () FOR REFERENCE ONLY

M08A (Rev K)

8-Pin SOIC
NS Package Number M08A

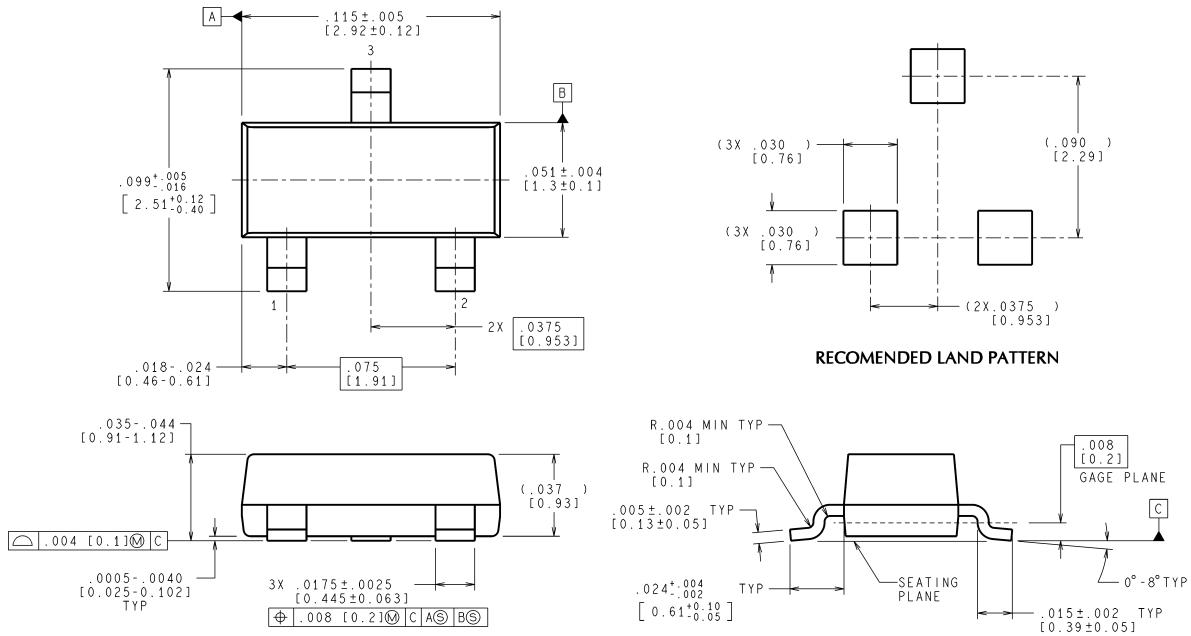


CONTROLLING DIMENSION IS INCH
VALUES IN [] ARE MILLIMETERS

MF03A (Rev B)

SOT-23 Molded Small Outline Transistor Package (M3)
NS Package Number MF03A

Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

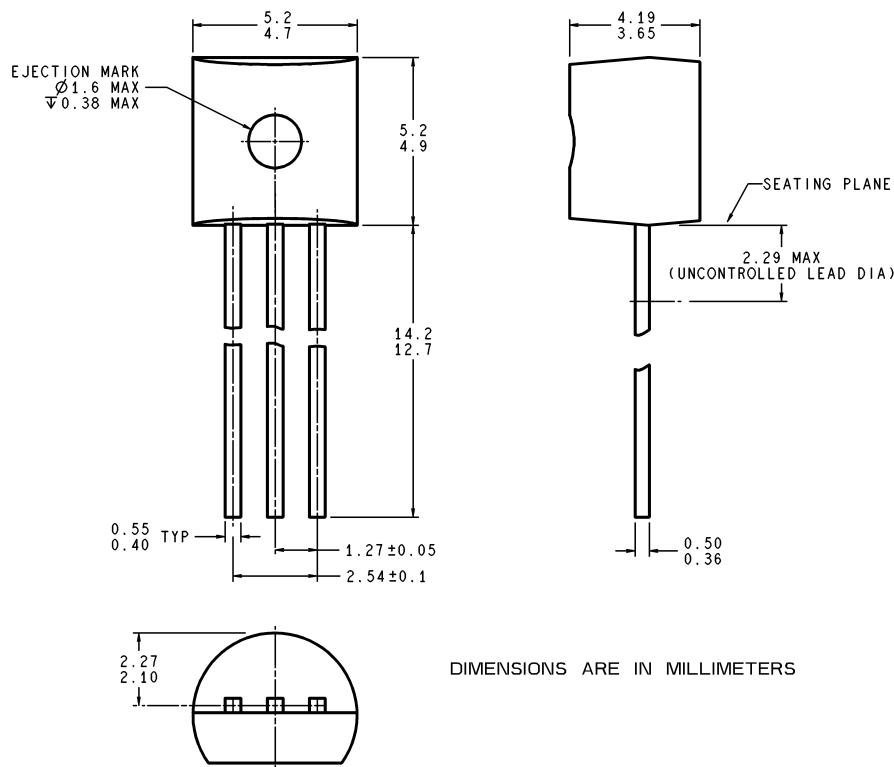


Z03A (Rev G)

NS Package Number Z03A

Physical Dimensions

inches (millimeters) unless otherwise noted (Continued)

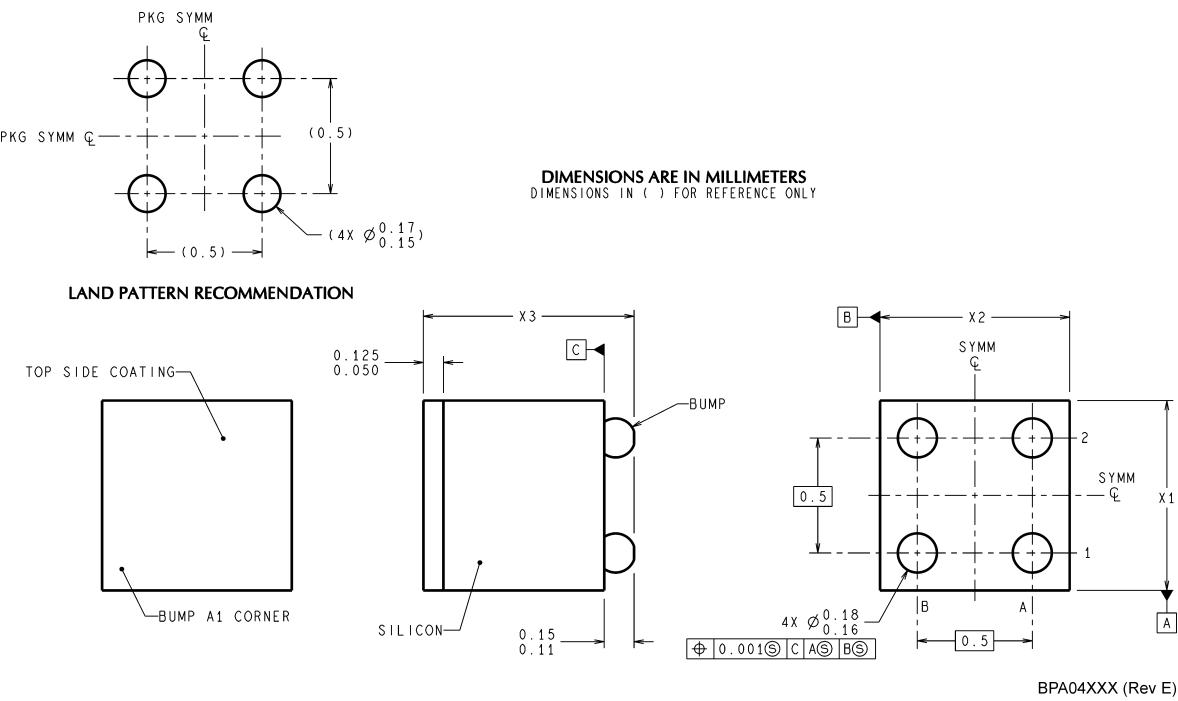

NOTES: UNLESS OTHERWISE SPECIFIED

1. EPOXY COATING
2. 63Sn/37Pb EUTECTIC BUMP
3. RECOMMEND NON-SOLDER MASK DEFINED LANDING PAD.
4. PIN A1 IS ESTABLISHED BY LOWER LEFT CORNER WITH RESPECT TO TEXT ORIENTATION. REMAINING PINS ARE NUMBERED.
5. XXX IN DRAWING NUMBER REPRESENTS PACKAGE SIZE VARIATION WHERE X1 IS PACKAGE WIDTH, X2 IS PACKAGE LENGTH AND X3 IS PACKAGE HEIGHT.
6. REFERENCE JEDEC REGISTRATION MO-211, VARIATION BA.

4-Bump micro SMD
X1 = 0.777 X2 = 0.904 X3 = 0.850
NS Package Number BPA04AFB

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.

For the most current product information visit us at www.national.com.

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

BANNED SUBSTANCE COMPLIANCE

National Semiconductor manufactures products and uses packing materials that meet the provisions of the Customer Products Stewardship Specification (CSP-9-111C2) and the Banned Substances and Materials of Interest Specification (CSP-9-111S2) and contain no "Banned Substances" as defined in CSP-9-111S2.



National Semiconductor
Americas Customer
Support Center
Email: new.feedback@nsc.com
Tel: 1-800-272-9959
www.national.com

National Semiconductor
Europe Customer Support Center
Fax: +49 (0) 180-530 85 86
Email: europe.support@nsc.com
Deutsch Tel: +49 (0) 69 9508 6208
English Tel: +44 (0) 870 24 0 2171
Français Tel: +33 (0) 1 41 91 8790

National Semiconductor
Asia Pacific Customer
Support Center
Email: ap.support@nsc.com

National Semiconductor
Japan Customer Support Center
Fax: 81-3-5639-7507
Email: jpn.feedback@nsc.com
Tel: 81-3-5639-7560