

# SECTION 5



## LATCHING, SEQUENCE AND STEPPER RELAYS

5 TO 30 AMPERES



- 711
- 755/250ML
- 285/388ML
- 303
- B255
- 385
- 311

**PRODUCT**



**711**



**755 / 250ML**



**285 / 388ML**

L X W X H (INCHES)

2.90 x 1.54 x 1.40

2.89 x 1.37 x 1.94

1.90 x 1.53 x 1.40

**FEATURES**

- ✦ IMPULSE SEQUENCING RELAY
- ✦ 3 - WAY TERMINALS, SOLDER, PLUG-IN, OR 0.187 QUICK CONNECT,
- ✦ HOLDS LAST SET POSITION WITH NO POWER REQUIRED

- ✦ PERMANENT MAGNETIC LATCHING RELAY
- ✦ 11 PIN OCTAL SOCKET
- ✦ DUAL COIL LATCHING
- ✦ SELF-MAINTAINING SET AND RESET COILS
- MAINTAINS LAST POSITION WITHOUT POWER
- ✦ AC OR DC COILS OPTIONAL
- BLOWOUT MAGNET
- ✦ OPTIONAL SILVER TIN OXIDE CONTACTS

- ✦ PERMANENT MAGNETIC LATCHING RELAY
- ✦ 3-WAY TERMINALS, SOLDER, PLUG-IN OR 0.187 QUICK CONNECT DUAL COIL LATCHING
- ✦ SELF-MAINTAINING SET AND RESET COILS
- ✦ MAINTAINS LAST POSITION WITHOUT POWER
- AC OR DC COILS
- ✦ OPTIONAL SILVER TIN OXIDE CONTACTS

COIL	UNITS
Standard Voltage AC:	50/60 Hz
DC:	
Coil Power AC (60 Hz):	VA
Coil Power DC:	W
Insulation System Per UL Standard 1446:	

12, 24, 110 / 120	12, 24, 110 / 120, 240	12, 24, 110 / 120, 220 / 240
12, 24, 48, 110 / 125	6, 12, 24, 48, 110 / 125	12, 24
1.8	2.0	2.1
1.8	1.64	1.9
Class B (130°C)	Class B (130°C)	Class B (130°C)

CONTACTS	
Contact Configuration:	
Contact Material:	
Contact Resistance (Initial):	m Ohms
Contact Rating AC Amperes (AC1):	A
Contact Rating AC Voltage:	V
Contact Rating DC Amperes (DC1):	A
Contact Rating DC Voltage:	V
Horse Power (AC):	Hp
Horse Power (AC):	Hp

	DPDT	DPDT	PDT SPDT-DM-DB
Silver alloy, gold flashed	Silver alloy, gold flashed	Silver alloy, gold flashed	
50	50	50	
12	16	10	
240	240	240	
12	16	10	
28	28	28	
1/3 @ 120	1/3 @ 120 V	1/3 @ 120 V	
1/2 @ 240	1/2 @ 240 V	1/2 @ 240 V	

TIMING	
Operate Time:	ms
Release Time:	ms

35	30	30
35	30	30

DIELECTRIC STRENGTH	
Coil to Contacts:	V rms
Insulation Resistance:	megohms minimum@VDC

1500	2500	2500
100 @ 5 VDC or 0.5 W	100 @ 5 VDC or 0.5 W	100 @ 5 VDC or 0.5 W

TEMPERATURE	
Operating, AC Lower:	°C
Operating, AC Upper:	°C
Operating, DC Lower:	°C
Operating, DC Upper:	°C
Storage, Lower:	°C
Storage, Upper:	°C

- 40	-30	-40
+70	+70	+70
- 40	-30	-40
+70	+75	+75
- 45	-30	-45
+105	+105	+105

LIFE EXPECTANCY	
Electrical @ Rated Load (AC1):	operations
Mechanical @ no Load :	operations

100,000	100,000	100,000
10,000,000	10,000,000	10,000,000

MISCELLANEOUS	
Cover Protection Category:	IP
Weight:	grams

40	40	40
110	170	87

**MATING SOCKETS**  
SEE SECTION 7

70-463-1

70-750D8-1, 70-750D11-1, 70-464-1,  
70-465-1, 70-169-1, 70-170-1,

70-463-1, 70-124-1, 70-124-2,  
70-178-1, 70-178-2,

**AGENCY APPROVALS**



# MECHANICAL LATCHING RELAYS



**303**



**B255**



**385**



**311**

2.90 x 1.53 x 1.40

2.63 x 1.47 x 4.56

3.04 x 1.67 x 2.392

2.65 x 1.47 x 4.56

- ✦ PERMANENT MAGNETIC LATCHING RELAY
- ✦ 0.25 TERMINALS, SOLDER, OR QUICK CONNECT OPTIONAL OPTIONAL CLASS F INSULATION
- ✦ DUAL COIL LATCHING
- ✦ SELF-MAINTAINING SET AND RESET COILS MAINTAINS LAST POSITION WITHOUT POWER
- ✦ AC OR DC COILS OPTIONAL BLOWOUT MAGNET
- ✦ OPTIONAL STUD, FLANGE OR DIN MOUNT

- ✦ 2 COIL MECHANICAL LATCHING RELAY
- ✦ SINGLE LEVEL SOCKET WIRING
- ✦ CONTINUOUS DUTY COILS BOTH COILS MAY BE ENERGIZED AT SAME TIME
- ✦ OPTIONAL BLOWOUT MAGNET
- ✦ OPTIONAL BIFURCATED CONTACT
- ✦ UP TO 4PST OR 3PDT

- ✦ 2 COIL MECHANICAL LATCHING RELAY
- ✦ 3 POLES PER COIL
- ✦ AC & DC COILS
- ✦ 0.187 QUICK CONNECT OR SOLDER
- ✦ DIN OR PANEL MOUNT BOTH COIL MAY BE ENERGIZED AT THE SAME TIME
- ✦ UP TO 6PDT
- 3 POLES PER COIL

- ✦ SEQUENCE (STEPPING) RELAY
- ✦ SINGLE COIL
- CONTINUOUS DUTY
- ✦ CONTACT TRANSFER MINERALIZING OR
- ✦ INDUSTRIAL PLUG-IN CONSTRUCTION

110 / 120  
12, 24

6, 12, 24, 110 / 120, 220 / 240  
6, 12, 24, 48, 110 / 125

6, 12, 24, 110 / 120, 220 / 240  
6, 12, 24, 48, 110 / 125

6, 12, 24, 110 / 120, 220 / 240  
6, 12, 24, 48, 110 / 125

2.1  
1.9

5.0  
2.0

2.0  
2.6

5.0  
2.0

Class B (130°C), Class F (155°C)

Class B (130°C)

Class B (130°C), Class F (155°C)

Class B (130°C)

**DPDT**

**UP TO 4PST OR 3PDT**

**DPDT, 4PDT & 6PDT**

**DPDT**

Silver alloy, gold flashed

Silver alloy, gold flashed

Silver alloy, gold flashed

Silver alloy,

50

50

50

50

30

10

15/3

5

277

120

277/ 600

120

30

10

10

5

28

24

28

30

1/3 @ 120 V

None

1/3 @ 120

None

1/2 @ 208 V to 600 V

None

1/2 @ 208 to 600

None

30

25

25

35

30

20

25

35

4000

1500

2000

1500

100 @ 5 VDC or 0.5 W

100 @ 5 VDC or 0.5 W

100 @ 5 VDC or 0.5 W

100 @ 5 VDC or 0.5 W

-40

-10

-40

-10

+60

+60

+70

+60

-40

-10

-40

-10

+65

+60

+70

+60

-40

-40

-40

-40

+105

+105

+105

+105

100,000

100,000

100,000

100,000

10,000,000

10,000,000

10,000,000

10,000,000

40

50

40

50

170

215

85

190

278390D

278390D



PAGE 10, 11



PAGE 12, 13



PAGE 14, 15



PAGE 16, 17

9/04

Latching relays are often confused with sequence, or stepper, and impulse relays. These are in fact three distinctly different types of devices, although in many cases one might be used to mimic the function of another.

### LATCHING RELAYS

Latching relays require one pulse of coil power to move their contacts in one direction, and another, separate one to move them back. Repeated pulses from the same input have no effect. Latching relays are useful in applications where power must be conserved since they require none to maintain their last position, or where it is desirable to have a relay that stays where it was during an interruption of power. They are most often divided into two sub-categories, magnetic latch and mechanical latch.

Magnetic latch relays employ either a permanent or “remanent” magnet to hold their last set Position. The permanent magnet type has the advantage, in that it will not lose its memory no matter how long it is left in one position, while the remanent type if left latched will eventually lose its magnetic charge and drop out. It will also operate backwards if the reset side is subjected to excessive voltage, while the permanent magnet types will tolerate extreme overvoltage to either input without malfunction or damage. The rest of this discussion will address only permanent magnet types.

Permanent magnet latch relays can have either single or dual coils. They will operate in one direction when power is applied with one polarity, and will reset when polarity is reversed on the single coil types, or when properly polarized voltage is applied to the reset coil of a dual version. Most dual coil types can also be used as single coil versions if necessary or desirable. Nearly all AC controlled magnetic latch relays have single coils that employ steering diodes to differentiate between operate and reset commands.

Mechanical latching relays use a catch device to hold their contacts in their last set Position until commanded to change state, usually by means of energizing a second coil. These types are often constructed in such a manner that when the operate coil is energized the contacts will go to the operated position regardless of whether the reset coil is energized or not. They will stay in that position only if the reset coil is not energized when power is removed from the operate side. This “operate coil dominant” operation can be especially useful in certain applications where it is desirable to have the relay function as a non-latching type unless an event has occurred, at which time the reset coil is de-energized. Packaging machinery that places several units into a single container would be a good example.

### SEQUENCE RELAYS

Sequence or stepper relays change the state of their contacts upon successive pulses of power to a single coil. Most employ some form of ratchet and cam assembly that requires several pulses to make one revolution of the cams. Many, but not all, have their cams arranged so that each contact transfers with each pulse. That is, if a contact is open it will close, if closed it will open. By utilizing two sets of double-throw contacts, these devices can perform a number of useful functions. They are most commonly used to equalize wear on two devices that are used to perform a single function. As each command for a device to operate is received, the one that did not operate last is energized. One of the most common uses of this function is sewage lift stations where two pumps sit side by side with only one operating at a time in normal service.

Sequence relays can also be used to perform other repetitive functions by altering the arrangement or number of lobes on their cams. For example, a sequence could be set up controlling two loads with successive pulses where one would come on, then the other, then both, then both would go off. Literally any such sequence is possible that has a number of steps that will divide evenly into the number of pulses required to rotate the cam one full turn.

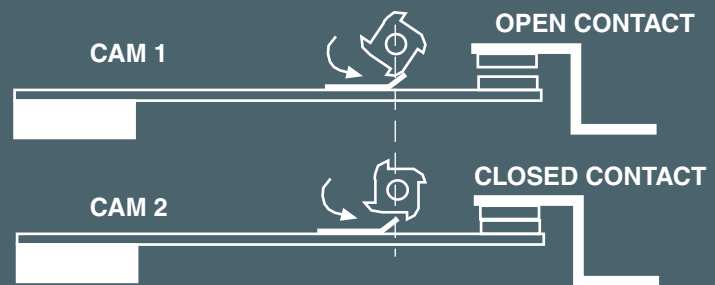


FIGURE 1

### IMPULSE RELAYS


Impulse relays are a form of sequence relay that will only perform the first function described earlier, each contact transfers on each pulse. In many cases the terms sequence and impulse can be used interchangeably, but not all.

Many impulse relays are made up of a magnetic latch relay and a solid state steering circuit that, upon application of power, determines which position the relay is in and energizes the opposite coil. The contacts transfer and hold that position when power is removed. When reenergized the contacts transfer again and hold that position, and so on.

Impulse relays can be used as wear equalizers. They are also well suited for applications such as turning a single device on or off from one or more locations with a single momentary switch or push button at each station. For example, a conveyor could be started and/or stopped from multiple locations by means of a single button at each position.

## DPDT, 12 AMPS

WIRING DIAGRAM  
(VIEWED FROM PIN END)



ALTERNATE NEMA  
OR IEC ( ) NUMBERS  
VIEWED FROM  
PIN SIDE

### FEATURES

- ELECTRONIC STEERING CIRCUIT
- PERMANENT MAGNETIC LATCH
- INDUSTRY STANDARD BLADE BASE
- LED INDICATORS

### BENEFITS

- TOGGLES LOADS ON/OFF (LOAD SHARING)
- HOLDS LAST POSITION INDEFINITELY
- DIRECTLY REPLACES OTHER MANUFACTURES
- VISUALLY INDICATES STEERING DIRECTION


TYPE 711 IS AN ALTERNATING RELAY USED FOR LOAD SHARING OR TOGGING ON / OFF OF ONE LOAD. EACH MOMENTARY PULSE, OR RE - APPLICATION OF INPUT VOLTAGE TOGGLES RELAY CONTACT. ONCE TRANSFERRED RELAY POSITION IS MAINTAINED INDEFINITELY BY INTERNAL MAGNETS.

## GENERAL SPECIFICATIONS (@ 25°C)

	UNITS	
<b>COIL</b>		
Pull-in Voltage AC (50/60 Hz):≤	% of nominal	85
Pull-in Voltage DC:≤	% of nominal	85
Dropout Voltage AC (50/60 Hz):≥	% of nominal	Not applicable
Dropout Voltage DC:≥	% of nominal	Not applicable
Maximum Voltage:	% of nominal	110
Resistance Tolerance:	% ±	10
Coil Power AC (50/60 Hz):	VA	1.8
Coil Power DC:	W	1.8
Insulation System Per UL Standard 1446: Duty:		Class B (130°C) Intermittent
<b>CONTACTS</b>		
Contact Material:		Silver alloy, gold flashed
Contact Rating AC Amperes (AC1):	A	12
Contact Rating AC Voltage:	V	240
Contact Rating DC Amperes (DC1):	A	12
Contact Rating DC Voltage:	V	28
Horse Power (AC):	HP	1/3 @ 120
Horse Power (AC):	HP	1/2 @ 240
Pilot Duty (60 Hz):		Not applicable
Minimum Recommended Load:	ma	100 @ 5 VDC or 0.5 W
<b>TIMING</b>		
Operate Time:	ms	35
Release Time:	ms	35
<b>DIELECTRIC STRENGTH</b>		
Coil to Contacts:	V rms	1500
Across Open Contacts:	V rms	500
Pole to Pole:	V rms	1500
Insulation Resistance:	megohms	1000 @ 500 minimum @VDC
<b>TEMPERATURE</b>		
Operating, AC Lower:	°C	-45
Operating, AC Upper:	°C	+70
Operating, DC Lower:	°C	-45
Operating, DC Upper:	°C	+70
Storage, Lower:	°C	-45
Storage, Upper:	°C	+105
<b>LIFE EXPECTANCY</b>		
Electrical @ Rated Load (AC1):	operations	100,000
Mechanical @ no Load :	operations	10,000,000
<b>MISCELLANEOUS</b>		
Operating Position:		Any
Insulation Material:		Molded plastic
Enclosure Material:		Clear Polycarbonate
Cover Protection Category:	IP	40
Weight:	grams	110

### OUTLINE DIMENSIONS

DIMENSIONS SHOWN IN INCHES & (MILLIMETERS).

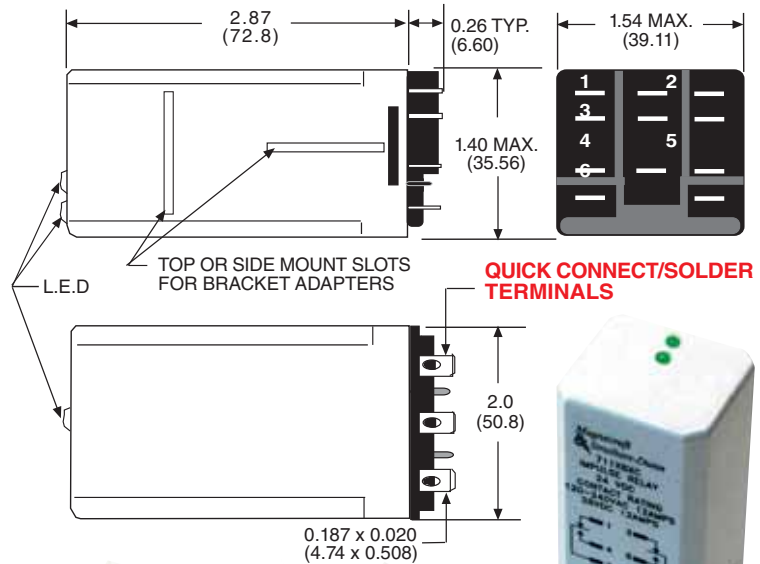

### TOP OR SIDE MOUNT BRACKET ADAPTERS

ORDERED AND SHIPPED SEPARATELY



STANDARD PART NUMBERS	NOMINAL INPUT VOLTAGE
<b>AC OPERATED, 12 AMP</b>	
711XBXCL-24A	24 VAC
711XBXCL-120A	120 VAC
<b>DC OPERATED, 12 AMP</b>	
711XBXCL-12D	12 VDC
711XBXCL-24D	24 VDC
711XBXCL-110D	110 VDC

Mating Socket  
70-463-1  
See section 7

## — FEATURES — — BENEFITS —

**11 PIN OCTAL BASE:**

**16 AMP CONTACT RATING:**

**PERMANENT MAGNET LATCHING MECHANISM:**

**EASILY INSTALLED IN EXISTING OR READILY AVAILABLE SOCKETS**


**ACCOMMODATES MOST CONTROL CIRCUIT LOADS**

**STAYS IN LAST SET POSITION INDEFINITELY WITH NO EXTERNAL POWER REQUIRED**

## GENERAL SPECIFICATIONS (@ 25°C)

	UNITS	
<b>COIL</b>		
Pull-in Voltage AC (50/60 Hz):≤	% of nominal	85
Pull-in Voltage DC:≤	% of nominal	80
Dropout Voltage AC (50/60 Hz):≥	% of nominal	Not applicable
Dropout Voltage DC:≥	% of nominal	Not applicable
Maximum Voltage:	% of nominal	500
Resistance Tolerance:	% ±	10
Coil Power AC (50/60 Hz):	VA	2
Coil Power DC:	W	1.64
Insulation System Per UL Standard 1446:		Class B (130°C)
Duty:		Single coil Continuous Dual coil intermittent
<b>CONTACTS</b>		
Contact Material:		Silver alloy, gold flashed
Contact Rating AC Amperes (AC1):	A	16
Contact Rating AC Voltage:	V	240
Contact Rating DC Amperes (DC1):	A	16
Contact Rating DC Voltage:	V	28
Horse Power (AC):	HP	1/3 @ 120 V
Horse Power (AC):	HP	1/2 @ 240 V
Pilot Duty (60 Hz):		Not applicable
Minimum Recommended Load:	ma	100 @ 5 VDC or 0.5 W
<b>TIMING</b>		
Operate Time:	ms	30
Release Time:	ms	30
<b>DIELECTRIC STRENGTH</b>		
Coil to Contacts:	V rms	2500
Across Open Contacts:	V rms	1500
Pole to Pole:	V rms	2500
Contacts to Frame:	V rms	Not applicable
Insulation Resistance:	megohms	1000 @ 500 minimum @VDC
<b>TEMPERATURE</b>		
Operating, AC Lower:	°C	-30
Operating, AC Upper:	°C	+70
Operating, DC Lower:	°C	-30
Operating, DC Upper:	°C	+75
Storage, Lower:	°C	-30
Storage, Upper:	°C	+105
<b>LIFE EXPECTANCY</b>		
Electrical @ Rated Load (AC1):	operations	100,000
Mechanical @ no Load :	operations	10,000,000
<b>MISCELLANEOUS</b>		
Operating Position:		Any
Insulation Material:		Molded plastic
Enclosure Material:		Clear Polycarbonate
Cover Protection Category:	IP	40
Weight:	grams	170

**MAGNETIC LATCHING RELAY WITH 11 PIN OCTAL BASE. OPERATES BY PULSED INPUT. PERMANENT MAGNET MAINTAINS LAST POSITION.**

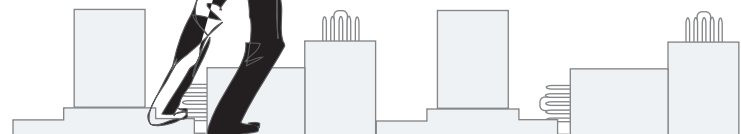

# 755/250ML OCTAL BASE MAGNETIC LATCHING RELAY




## DPDT, 16 AMPS



WIRING DIAGRAM  
(VIEWED FROM PIN END)

### OUTLINE DIMENSIONS

DIMENSIONS SHOWN IN INCHES & (MILLIMETERS).

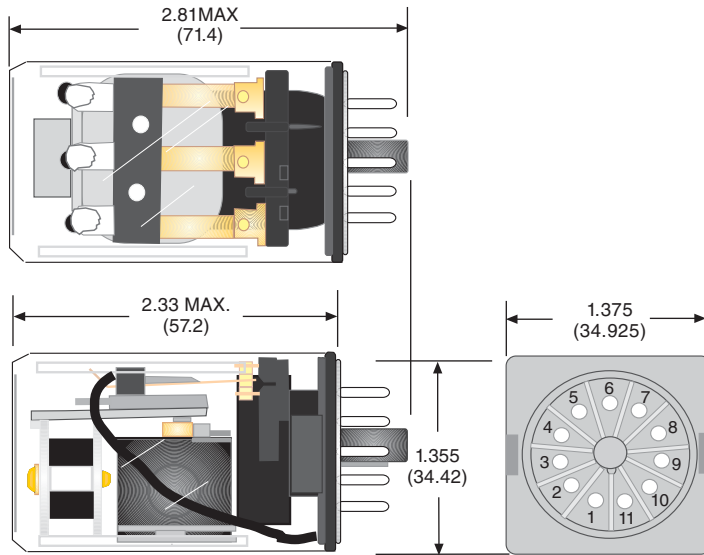

8 PIN OCTAL BASE  
NOT SHOWN

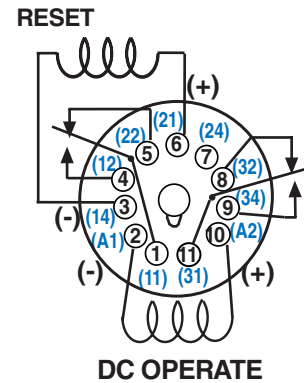

ALTERNATE NEMA  
OR IEC ( ) NUMBERS  
VIEWED FROM  
PIN SIDE



### ORDERING CODE

**755** **XBXC** **C** **-120A**

**CLASS:** \_\_\_\_\_

**CONTACT CONFIGURATION:**  
DPDT: **XBXC**

**OPTIONS:** \_\_\_\_\_  
MAGNETIC BLOWOUT: **CODE 69**  
SILVER TIN CONTACTS: **CODE 36**

**PLAIN COVER:** \_\_\_\_\_  
**CODE C**

**DUAL COIL:** \_\_\_\_\_  
**CODE D (DC ONLY)**

**SINGLE COIL:**  
**NO CODE**

**COIL VOLTAGE:** \_\_\_\_\_  
6, 12, 24, 120, 220/230, 240 **ADD "A" FOR AC COILS**  
6, 12, 24, 48, 110 **ADD "D" FOR DC COILS**

**Mating Sockets**  
70-750D8-1, 70-750D11-1,  
70-464-1, 70-465-1: **SCREW/DIN**  
70-169-1, 70-170-1: **SCREW/PANEL**  
See section 7

STANDARD PART NUMBERS		COIL MEASURED @ 25 °C		
		NOMINAL INPUT VOLTAGE	OPERATE VOLTAGE MIN.	NOMINAL RESISTANCE (OHMS)
<b>AC OPERATED SINGLE COIL, 16 AMP</b>				
<b>NEW PART NUMBER</b>	<b>SUPERCEDES</b>			
755XBXC-24A	W250AML2CPX-8	24 VAC	19.2 VAC	740 Ω
755XBXC-120A	W250AML2CPX-9	120 VAC	96 VAC	10,000 Ω
755XBXC-240A	W250AML2CPX-10	240 VAC	192 VAC	36,00 Ω
<b>DC OPERATED DUAL COIL, 16 AMP</b>				
755XBXCD-12D	W250ML2CPX-6	12 VDC	8.4 VDC	88/88 Ω
755XBXCD-24D	W250ML2CPX-7	24 VDC	16.7 VDC	350/350 Ω
755XBXCD-110D	W250ML2CPX-8	110 VDC	77 VDC	9000/9000 Ω

RETROFITS IDEC RR2KP-U, SEE END OF SECTION 5 FOR CROSS REFERENCE



UL Recognized  
File No. E43641

Recognized Component  
mark for Canada and the  
United States.



COMPLIES WITH REQUIREMENTS OF

\* IEC STANDARDS 947-4-1 AND  
947-5-1 LOW VOLTAGE DIRECTIVE

\* IEC = INTERNATIONAL  
ELECTROTECHNICAL COMMISSION

\* CE TESTING AND EVALUATION  
PERFORMED BY THE UNDERWRITERS  
LABORATORIES AS A THIRD PARTY  
PARTICIPANT

## FEATURES

**11 PIN BLADE TERMINAL  
SQUARE BASE:**

**CONSERVATIVE 10 AMP  
CONTACT RATING:**

**3 AMP 600 VAC  
CONTACT RATING:**

## BENEFITS

**ACCEPTS STANDARD 0.187" QUICK CONNECT  
TERMINALS AS WELL AS EXISTING  
READILY AVAILABLE SOCKETS**


**WILL TOLERATE SIGNIFICANT ACCIDENTAL  
OVERLOADS WITHOUT PREMATURE FAILURE**

**ACCOMMODATES NEARLY ALL  
CONTROL CIRCUIT VOLTAGES**

## GENERAL SPECIFICATIONS (@ 25°C)

	UNITS	
<b>COIL</b>		
Pull-in Voltage AC (50/60 Hz):≤	% of nominal	85
Pull-in Voltage DC:≤	% of nominal	80
Dropout Voltage AC (50/60 Hz):≥	% of nominal	Not applicable
Dropout Voltage DC:≥	% of nominal	Not applicable
Maximum Voltage:	% of nominal	500
Resistance Tolerance:	% ±	10
Coil Power AC (50/60 Hz):	VA	2.1
Coil Power DC:	W	1.9
Insulation System Per UL Standard 1446:		Class B (130°C)
Duty:		Single coil Continuous Dual coil intermittent
<b>CONTACTS</b>		
Contact Material:		Silver alloy, gold flashed
Contact Rating AC Amperes (AC1):	A	10
Contact Rating AC Voltage:	V	240
Contact Rating DC Amperes (DC1):	A	10
Contact Rating DC Voltage:	V	28
Horse Power (AC):	HP	1/3 @ 120 V
Horse Power (AC):	HP	1/2 @ 240 V
Pilot Duty (60 Hz):		Not applicable
Minimum Recommended Load:	ma	100 @ 5 VDC or 0.5 W
<b>TIMING</b>		
Operate Time:	ms	30
Release Time:	ms	30
<b>DIELECTRIC STRENGTH</b>		
Coil to Contacts:	V rms	2500
Across Open Contacts:	V rms	1500
Pole to Pole:	V rms	2500
Contacts to Frame:	V rms	Not applicable
Insulation Resistance:	megohms minimum @VDC	1000 @ 500
<b>TEMPERATURE</b>		
Operating, AC Lower:	°C	-40
Operating, AC Upper:	°C	+70
Operating, DC Lower:	°C	-40
Operating, DC Upper:	°C	+75
Storage, Lower:	°C	-45
Storage, Upper:	°C	+105
<b>LIFE EXPECTANCY</b>		
Electrical @ Rated Load (AC1):	operations	100,000
Mechanical @ no Load :	operations	10,000,000
<b>MISCELLANEOUS</b>		
Operating Position:		Any
Insulation Material:		Molded plastic
Enclosure Material:		Clear Polycarbonate
Cover Protection Category:	IP	40
Weight:	grams	87

**MAGNETIC LATCHING RELAY  
WITH SQUARE BASE.  
OPERATES BY PULSED INPUT.  
PERMANENT MAGNET MAINTAINS  
LAST POSITION.**




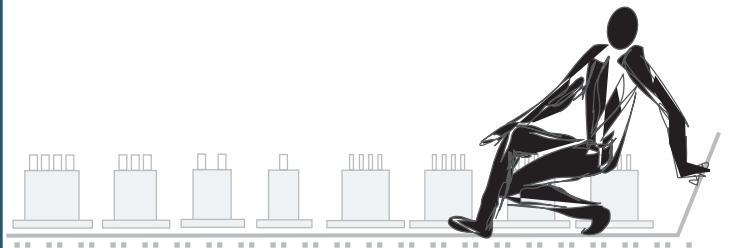




## DPDT, 10 AMPS

### WIRING DIAGRAM (VIEWED FROM PIN END)

#### OUTLINE DIMENSIONS DIMENSIONS SHOWN IN INCHES & (MILLIMETERS).

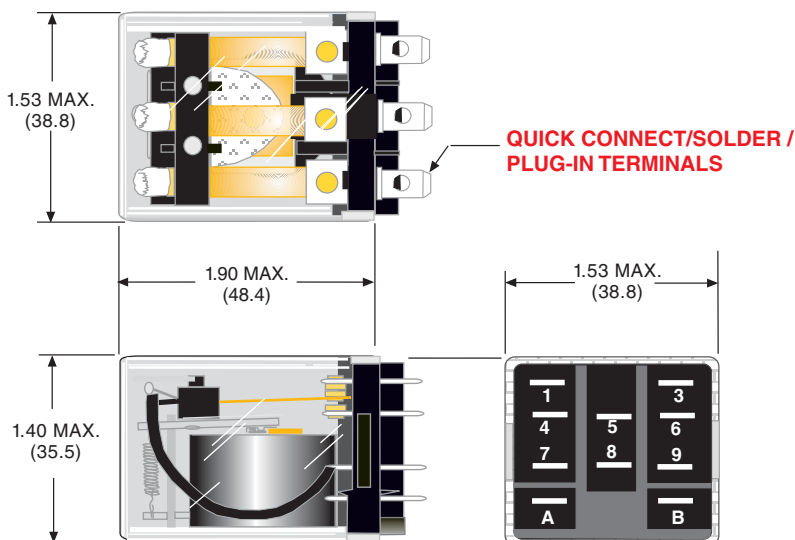

ALTERNATE NEMA  
OR IEC ( ) NUMBERS  
VIEWED FROM  
PIN SIDE




#### Mating Sockets

70-463-1: SCREW/DIN, 70-124-1: SOLDER  
70-178-1, 70-178-2: PRINTED CIRCUIT  
70-124-2: QUICK CONNECT

See section 7

#### ORDERING CODE

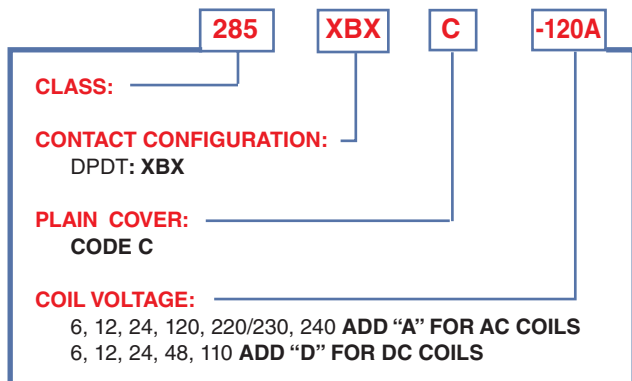

STANDARD PART NUMBERS	EQUIVALENT PART NUMBERS	COIL MEASURED @ 25 °C	
		NOMINAL INPUT VOLTAGE	NOMINAL RESISTANCE (OHMS)
<b>AC OPERATED, SINGLE COIL, 10 AMP</b>			
285XBXC-120A	W388AMLCPX-9	120 VAC	10,000 Ω
<b>DC OPERATED, SINGLE COIL, 10 AMP</b>			
285XBXC-12D	W388MLCPX-6	12 VDC	120 Ω
285XBXC-24D	W388MLCPX-7	24 VDC	470 Ω
<b>DC OPERATED, DUAL COIL, 10 AMP</b>			
285XBXCD-12D	W388ML2CPX-6	12 VDC	88/88 Ω
285XBXCD-24D	W388ML2CPX-7	24 VDC	350/350 Ω

## FEATURES

0.250" QUICK CONNECT/  
SOLDER TERMINALS:

2 MM CONTACT GAPS:

COMPACT DESIGN:

WIDE SELECTION OF COVER  
STYLES AND OPTIONS:

## BENEFITS

SIMPLE INSTALLATION, WILL ACCEPT FULLY  
INSULATED (BOOTED) TERMINALS

MEETS NEARLY ALL INTERNATIONAL  
REQUIREMENTS FOR SPACING

HANDLES "CONTACTOR LOADS"  
IN A CONTROL RELAY PACKAGE.

CAN BE "CUSTOMIZED" AS NEEDED  
WITHOUT EXCESSIVE COST OR MINIMUMS



## GENERAL SPECIFICATIONS (@ 25°C)

	UNITS	
<b>COIL</b>		
Pull-in Voltage AC (50/60 Hz):≤	% of nominal	85
Pull-in Voltage DC:≤	% of nominal	80
Dropout Voltage AC (50/60 Hz):≥	% of nominal	Not applicable
Dropout Voltage DC:≥	% of nominal	Not applicable
Maximum Voltage:	% of nominal	500
Resistance Tolerance:	% ±	10
Coil Power AC (50/60 Hz):	VA	2
Coil Power DC:	W	1.64
Insulation System Per UL Standard 1446:		Class B (130°C) Class F (155°C)
Duty:		Continuous
<b>CONTACTS</b>		
Contact Material:		Silver alloy, gold flashed
Contact Rating AC Amperes (AC1):	A	30
Contact Rating AC Voltage:	V	277
Contact Rating DC Amperes (DC1):	A	30
Contact Rating DC Voltage:	V	28
Horse Power (AC):	HP	1/3 @ 120 V
Horse Power (AC):	HP	1/2 @ 208 V to 600 V
Pilot Duty (60 Hz):		Not applicable
Minimum Recommended Load:	ma	100 @ 5 VDC or 0.5 W
<b>TIMING</b>		
Operate Time:	ms	30
Release Time:	ms	30
<b>DIELECTRIC STRENGTH</b>		
Coil to Contacts:	V rms	4000
Across Open Contacts:	V rms	1000
Pole to Pole:	V rms	2200
Contacts to Frame:	V rms	Not applicable
Insulation Resistance:	megohms minimum @VDC	1000 @ 500
<b>TEMPERATURE</b>		
Operating, AC Lower:	°C	-40
Operating, AC Upper:	°C	+60
Operating, DC Lower:	°C	-40
Operating, DC Upper:	°C	+65
Storage, Lower:	°C	-40
Storage, Upper:	°C	+105
<b>LIFE EXPECTANCY</b>		
Electrical @ Rated Load (AC1):	operations	100,000
Mechanical @ no Load :	operations	10,000,000
<b>MISCELLANEOUS</b>		
Operating Position:		Any
Insulation Material:		Molded plastic
Enclosure Material:		Clear Polycarbonate
Cover Protection Category:	IP	40
Weight:	grams	170

MAGNETIC LATCHING RELAY WITH SQUARE BASE. OPERATES BY PULSED INPUT AND MAINTAINS LAST POSITION.

*THE CLASS 303 RELAY HAS BEEN DESIGNED FOR INSTALLATION OF FULLY INSULATED 0.250" QUICK CONNECT TERMINALS. CONTACT GAPS ARE 2 MILLIMETERS WIDE TO MEET MOST STANDARDS FOR CREEPAGE AND CLEARANCE. THE OPTIONAL MAGNETIC BLOWOUT ALLOWS FOR HIGH VOLTAGE DC SWITCHING APPLICATIONS. ITS LATCH MECHANISM KEEPS IT IN ITS LAST SET POSITION UNTIL COMMANDED TO CHANGE BY MEANS OF A SEPARATE SIGNAL.*



# 303 SQUARE BASE POWER MAGNETIC LATCHING RELAYS




## DPDT, 30 AMPS

### WIRING DIAGRAM (VIEWED FROM PIN END)


#### OUTLINE DIMENSIONS

DIMENSIONS SHOWN IN INCHES & (MILLIMETERS).

#### ENCLOSED FLANGE MOUNT



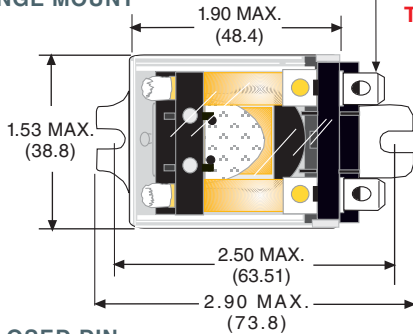


#### QUICK CONNECT/SOLDER TERMINALS



#### PRINTED CIRCUIT TERMINALS

#### ENCLOSED DIN MOUNT COVER

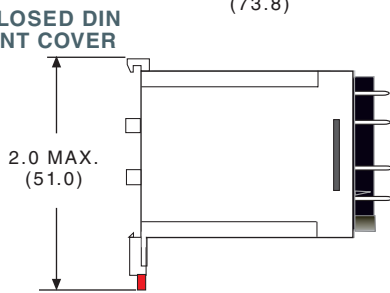

ENCLOSED STYLE CHOICE OF 6-32 STUD OR TAPPED CORE WITH ANTI ROTATION TAB.

#### ORDERING CODE

**F** **303** **XBXC** **C1** **L** **-240A**

#### COILS:

130°C: NO CODE, 155°C: CODE F

#### CLASS:

303 - 30 AMPS RATING WITH 0.25 QUICK CONNECT/SOLDER TERMINALS

#### CONTACT ARRANGEMENTS:

XBXC: DPDT, BXC: DPST-N.O.  
XHX: SPDT - DM -DB, XXB: DPST-N.C.

#### CONSTRUCTION STYLE:

\*ENCLOSED, PLAIN COVER: CODE C  
ENCLOSED, SIDE FLANGE MOUNT: CODE C1  
ENCLOSED, 6-32 TAPPED CORE & ANTI-ROTATION TAB: CODE CS2  
ENCLOSED, 6-32 STUD & ANTI-ROTATION TAB: CODE CS2  
ENCLOSED, TOP FLANGE MOUNT: CODE C3  
ENCLOSED, DIN MOUNT: CODE C4

#### TERMINALS STYLE:

SOLDER/QUICK CONNECT TERMINALS: NO CODE  
\*PRINTED CIRCUITS TERMINALS: CODE T






#### OPTIONS:

L.E.D. STATUS LAMP: CODE L (NOT AVAILABLE W/CODE 4)  
MAGNET BLOWOUT: CODE 69  
\*\*DUAL COIL: CODE D

#### COIL VOLTAGE:

6, 12, 24, 120, 240 ADD "A" FOR AC COILS  
6, 12, 24, 48, 110-125 ADD "D" FOR DC COILS

\* Note: Code "C" Recommended To Be Used With Printed Circuit Terminals  
\*\* Note: Dual Coil Not Available On Xbx Contact Arrangement

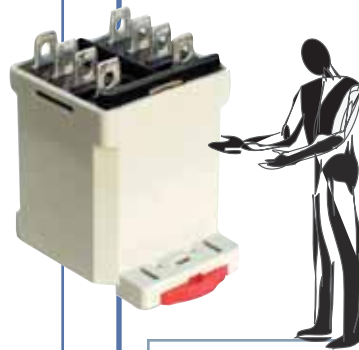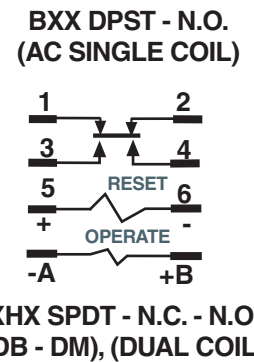

STANDARD PART NUMBERS	CONTACT CONFIGURATION	COIL MEASURED @ 25 °C	
		NOMINAL INPUT VOLTAGE	NOMINAL RESISTANCE (OHMS)
<b>AC OPERATED, SINGLE COIL, 30 AMP</b>			
303BXC3-120A	DPST-N.O	120 VAC	6300 Ω
303BXC1-120A	DPDT	120 VAC	6300 Ω
<b>DC OPERATED, SINGLE COIL, 30 AMP</b>			
303BXC1-24D	DPDT	24 VDC	300 Ω
303BXC4-24D	DPDT	24 VDC	300 Ω
303BXC69C-24D	DPDT	24 VDC	300 Ω
<b>DC OPERATED, DUAL COIL, 30 AMP</b>			
303XHC1D-12D	SPDT-N.C.-N.O. (DB-DM)	12 VDC	70/70 Ω

RETROFITS POTTER & BRUMFIELD KUB  
SEE END OF SECTION 5 FOR CROSS REFERENCE



UL Recognized  
File No. E13224



UL Listed industrial  
control equipment 225G  
when used with  
27390D socket

## FEATURES

INDUSTRIAL PLUG-IN CONSTRUCTION

2 COILS WITH OPERATE COIL DOMINANT

MULTIPLE CONTACT ARRANGEMENTS  
AND AVAILABLE OPTIONS

GOLD DIFFUSED  
CONTACTS STANDARD

## BENEFITS

ULTIMATE RUGGEDNESS & RELIABILITY.

VERSATILE OPERATION

CAN BE PURCHASED EXACTLY  
AS NEEDED

WILL NOT TARNISH, LOW CONTACT  
RESISTANCE FOR THE LIFE OF THE RELAY

## GENERAL SPECIFICATIONS (@ 25°C)

	UNITS	
<b>COIL</b>		
Pull-in Voltage AC (50/60 Hz): ≤	% of nominal	85
Pull-in Voltage DC: ≤	% of nominal	80
Dropout Voltage AC (50/60 Hz): ≥	% of nominal	Not applicable
Dropout Voltage DC: ≥	% of nominal	Not applicable
Maximum Voltage:	% of nominal	110
Resistance Tolerance:	% ±	10
Coil Power AC (50/60 Hz):	VA	5
Coil Power DC:	W	2
Insulation System		
Per UL Standard 1446:		Class B (130°C)
Duty:		Continuous
<b>CONTACTS</b>		
Contact Material:		Silver alloy, gold flashed
Contact Rating AC Amperes (AC1):	A	10
Contact Rating AC Voltage:	V	120
Contact Rating DC Amperes (DC1):	A	10
Contact Rating DC Voltage:	V	24
Horse Power (AC):	HP	None
Horse Power (AC):	HP	None
Pilot Duty (60 Hz):		Not applicable
Minimum Recommended Load:	ma	100 @ 5 VDC or 0.5 W
<b>TIMING</b>		
Operate Time:	ms	25
Release Time:	ms	20
<b>DIELECTRIC STRENGTH</b>		
Coil to Contacts:	V rms	1500
Across Open Contacts:	V rms	1500
Pole to Pole:	V rms	1500
Contacts to Frame:	V rms	1500
Insulation Resistance:	megohms minimum @VDC	1000 @ 500
<b>TEMPERATURE</b>		
Operating, AC Lower:	°C	-10
Operating, AC Upper:	°C	+60
Operating, DC Lower:	°C	-10
Operating, DC Upper:	°C	+60
Storage, Lower:	°C	-40
Storage, Upper:	°C	+105
<b>LIFE EXPECTANCY</b>		
Electrical @ Rated Load (AC1):	operations	100,000
Mechanical @ no Load :	operations	10,000,000
<b>MISCELLANEOUS</b>		
Operating Position:		Any
Insulation Material:		Molded plastic
Enclosure Material:		Clear Polycarbonate
Cover Protection Category:	IP	50
Weight:	grams	215


## UL CONTACT LOAD RATINGS TABLE

VOLTS	MAKE	CARRY	BREAK	
			RESISTIVE	INDUCTIVE
24 VDC	30 A	10 A	10 A	10 A
120 VAC	30 A	10 A	10 A	3 A
240 VAC	30 A	10 A	5 A	1 A
28 VDC	30 A	10 A	10 A	3 A
125 VDC	30 A	10 A	0.5 A	0.1 A
<b>**FOR VERSIONS WITH SUFFIX "69" PERMANENT MAGNET BLOWOUTS</b>				
125 VDC SM*	30 A	10 A	1.5 A	0.5 A
125 VDC DM	30 A	10 A	4 A	1.5 A
250 VDC SM	30 A	10 A	0.5 A	150 A
250 VDC DM	30 A	10 A	1.5 A	0.5 A
<b>**FOR VERSIONS WITH SUFFIX "33" BIFURCATED CONTACTS</b>				
120 VAC	1.5 A	5 A	5 A	2 A
240 VAC	7.5 A	2.5 A	2.5 A	1 A

\*\* RELAYS WITH CODE 69 FEATURE (CHECK WITH FACTORY FOR UL & CSA LISTING)

\* SM = SINGLE MAKE DM = DOUBLE MAKE

**THE CLASS B255 IS A TWO COIL LATCHING VERSION OF THE GENERAL PURPOSE TYPE 219 RELAY. WHEN THE OPERATE COIL IS MOMENTARILY ENERGIZED, THE RELAY MECHANICALLY LATCHES IN THE ENERGIZED POSITION AND REMAINS IN THE ENERGIZED POSITION WITH THE POWER REMOVED FROM THE COIL. THE SECOND COIL WHEN MOMENTARILY ENERGIZED, PROVIDES ELECTRICAL RESET OF THE CONTACTS. ALL CONTACTS OPERATE FROM A COMMON ARMATURE TO PREVENT CONTACT OVERLAPPING. COILS ARE RATED FOR CONTINUOUS DUTY. NUCLEAR QUALIFIED VERSIONS ARE AVAILABLE. CONTACT THE FACTORY FOR DETAILS.**

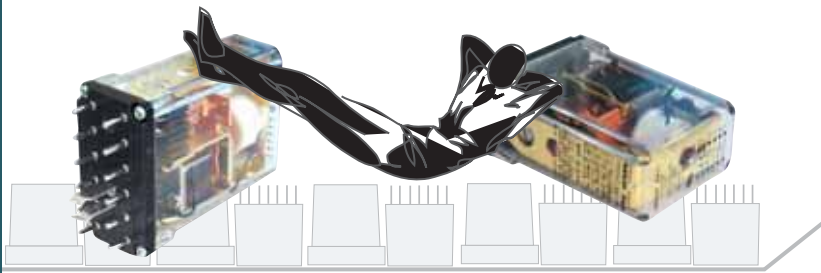

# B255 INDUSTRIAL PLUG - IN LATCHING RELAY



## UP TO 3PDT, 10 AMPS


WIRING DIAGRAM  
(VIEWED FROM PIN END)

### COIL SPECIFICATIONS @ 25°C


### AC COIL DATA (50/60 Hz)

NOMINAL VOLTAGE	RESET COIL (3 VA)		OPERATE COIL (5 VA)	
	RESISTANCE OHMS ±10%	COIL CURRENT (mA)	RESISTANCE OHMS ±10%	COIL CURRENT (mA)
6	3.0	840	1.10	800
12	14.5	256	4.20	410
24	52.0	150	15.5	200
120	1450	26.5	540	45.0
240	5000	4.8	1815	13.2


Current inrush on all AC coils is less than twice the listed milliamperes ratings as shown in the AC coil data table. Currents shown in table measured at 60 Hz.




**B255XBXP (DPDT)**



**B255XCXP (3PDT)**



**B255ABXP (DPDT + 1 N.O.)**



**B255BXBP (2 N.O. + 2 N.C.)**

### COIL SPECIFICATIONS @ 25°C


### DC COIL DATA

NOMINAL VOLTAGE	RESET COIL (1.4 W)		OPERATE COIL (1.8 W)	
	RESISTANCE OHMS ±10%	COIL CURRENT (mA)	RESISTANCE OHMS ±10%	COIL CURRENT (mA)
6	21.0	286	15.5	385
12	85.0	141	63.5	189
24	300	80	250	96.0
115/125	8000	14.4	6200	20.0

DC relays, 1.8 Watts (2.5 W @ 125VDC)

### OUTLINE DIMENSIONS

DIMENSIONS SHOWN IN INCHES & (MILLIMETERS).

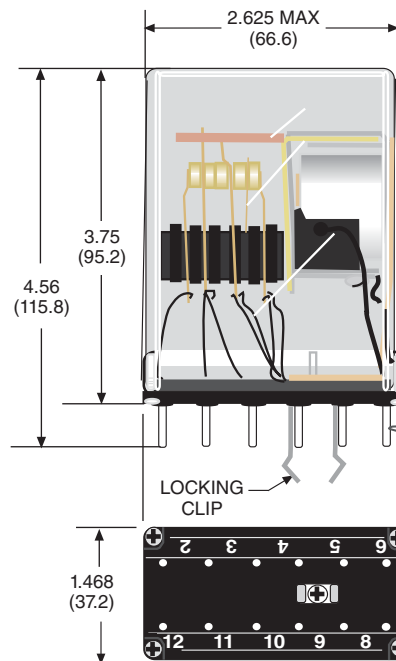

### ORDERING CODE

**B255** **XCX** **P** **LM** **-120A**

#### CLASS:

B255 2 COIL LATCH PLUG-IN

#### CONTACT ARRANGEMENTS:

XBX: DPDT  
XCX: 3PDT  
ABX: SPST-NO & 2 FORM C  
BXX: DPST-NO & 2 FORM B

#### STANDARD FEATURES:


POLYCARBONATE COVER: CODE "P"

#### OPTIONAL FEATURES:

INDICATOR LAMP ACROSS BOTH COILS: CODE "L"  
MANUAL ACTUATOR: CODE "M"  
LIGHT & ACTUATOR: CODE "LM"  
PERM. MAGNET BLOWOUT: CODE "69"  
BIFURCATED CONTACTS: CODE "33"  
DC COIL SUPPRESSION: CODE "V"  
AC COIL SUPPRESSION: CODE "V1"

#### COIL VOLTAGE:

6, 12, 24, 120, 240 ADD "A" FOR AC COILS  
6, 12, 24, 115-125 ADD "D" FOR DC COILS

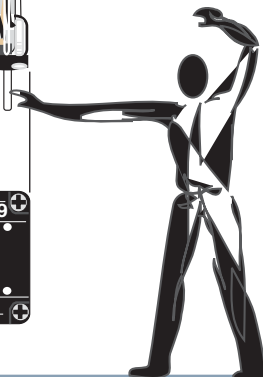

Mating Socket  
**27390D**  
See section 7

STANDARD PART NUMBERS	CONTACT CONFIGURATION	COIL MEASURED @ 25 °C	
		NOMINAL INPUT VOLTAGE	NOMINAL RESISTANCE (OHMS)
<b>AC OPERATED, 10 AMP</b>			
B255BXBP-120A	2 N.O. + 2 N.C.	120 VAC	540/1450 Ω
B255XBXP-120A	DPDT	120 VAC	540/1450 Ω
B255XCXP-120A	3PDT	120 VAC	540/1450 Ω
<b>DC OPERATED, DUAL COIL, 10 AMP</b>			
B255BXBP-24D	DPDT	24 VDC	250/300 Ω



## FEATURES

## BENEFITS

**UP TO 6PDT  
15 AMP CONTACT:**

**MAXIMUM FLEXIBILITY OF USES EASILY HANDLES  
MODERATELY HEAVY LOADS**

**3 AMP 600 VAC RATING:**

**SUITABLE FOR NEARLY ALL CONTROL VOLTAGES**

**DIN RAIL/PANEL  
MOUNTABLE:**

**RAPID INSTALLATION -CAN REPLACE  
EXISTING OPEN TYPES SUCH AS POTTER &  
BRUMFIELD KUB WITHOUT PANEL MODIFICATION**

**RECTIFIED COILS  
ON AC TYPES:**

**RUNS COOLER & QUIETER,  
USES LESS ENERGY.**

## GENERAL SPECIFICATIONS (@ 25°C)

	UNITS	
<b>COIL</b>		
Pull-in Voltage AC (50/60 Hz):	% of nominal	85
Pull-in Voltage DC:	% of nominal	80
Dropout Voltage AC (50/60 Hz):	% of nominal	Not applicable
Dropout Voltage DC:	% of nominal	Not applicable
Maximum Voltage:	% of nominal	110
Resistance Tolerance:	% ±	10
Coil Power AC (50/60 Hz):	VA	2
Coil Power DC:	W	2.6
Insulation System		
Per UL Standard 1446:		Class B (130°C), F(155°C)
Duty:		Intermittent
<b>CONTACTS</b>		
Contact Material:		Silver alloy, gold flashed
Contact Rating AC Amperes (AC1):	A	15 / 3
Contact Rating AC Voltage:	V	277/ 600
Contact Rating DC Amperes (DC1):	A	10
Contact Rating DC Voltage:	V	28
Horse Power (AC):	HP	1/3 @ 120
Horse Power (AC):	HP	1/2 @ 208 to 600
Pilot Duty (60 Hz):		Not applicable
Minimum Recommended Load:	ma	100 @ 5 VDC or 0.5 W
<b>TIMING</b>		
Operate Time:	ms	25
Release Time:	ms	25
<b>DIELECTRIC STRENGTH</b>		
Coil to Contacts:	V rms	2000
Across Open Contacts:	V rms	500
Pole to Pole:	V rms	1500
Contacts to Frame:	V rms	Not applicable
Insulation Resistance:	megohms minimum @VDC	1000 @ 500
<b>TEMPERATURE</b>		
Operating, AC Lower:	°C	-40
Operating, AC Upper:	°C	+70
Operating, DC Lower:	°C	-40
Operating, DC Upper:	°C	+70
Storage, Lower:	°C	-40
Storage, Upper:	°C	+105
<b>LIFE EXPECTANCY</b>		
Electrical @ Rated Load (AC1):	operations	100,000
Mechanical @ no Load :	operations	10,000,000
<b>MISCELLANEOUS</b>		
Operating Position:		Any
Insulation Material:		Molded plastic
Enclosure Material:		Clear Polycarbonate
Cover Protection Category:	IP	40
Weight:	grams	85

*THE CLASS 385 RELAY IS A MECHANICALLY LATCHED, ELECTRICALLY RESET RELAY, IT CAN BE FURNISHED WITH TWO, FOUR OR SIX SETS OF DOUBLE THROW CONTACTS, AND ALL POPULAR COIL VOLTAGES. AC COIL TYPES INCORPORATE BUILT IN RECTIFIERS FOR MAXIMUM COIL EFFICIENCY AND MINIMAL HEATING FOR CONTINUOUS DUTY CAPABILITY. ALL TERMINALS ARE STANDARD 0.187 INCH QUICK CONNECT AND ARE ALSO PIERCED FOR DIRECT SOLDER CONNECTION IF DESIRED. THE MOLDED PLASTIC DUST COVER SNAPS ONTO A STANDARD DIN RAIL, AS WELL AS INCORPORATING MOUNTING SLOTS THAT EXACTLY MATCH POTTER & BRUMFIELD'S KUB. UNLIKE MOST MECHANICAL LATCH RELAYS, THE 385 DOES NOT HAVE A DOMINANT COIL. IF BOTH COILS ARE ENERGIZED AT THE SAME TIME, ALL OF THE NORMALLY OPEN CONTACTS CLOSE, AND ALL NORMALLY CLOSED CONTACTS OPEN. WHICH EVER COIL IS DE-ENERGIZED FIRST, RELEASES AND LOCKS THE OTHER SIDE IN ITS ENERGIZED POSITION.*










# 385 DIN / PANEL MOUNTABLE LATCHING RELAY



## DPDT, 4PDT & 6PDT 15 AMPS

WIRING DIAGRAM  
(VIEWED FROM PIN END)

### OUTLINE DIMENSIONS DIMENSIONS SHOWN IN INCHES & (MILLIMETERS).

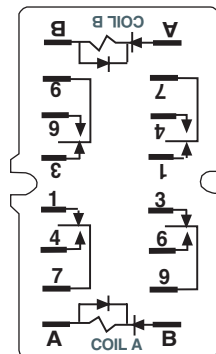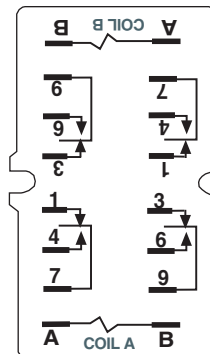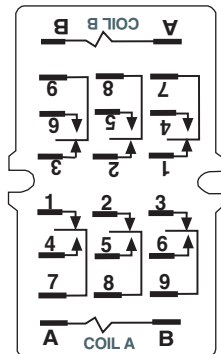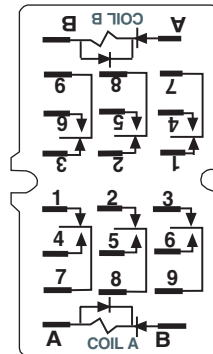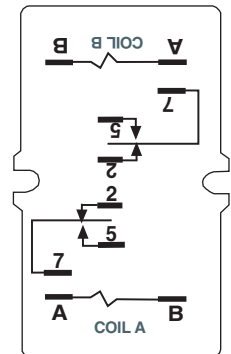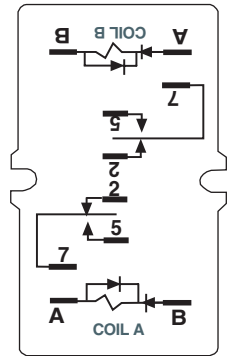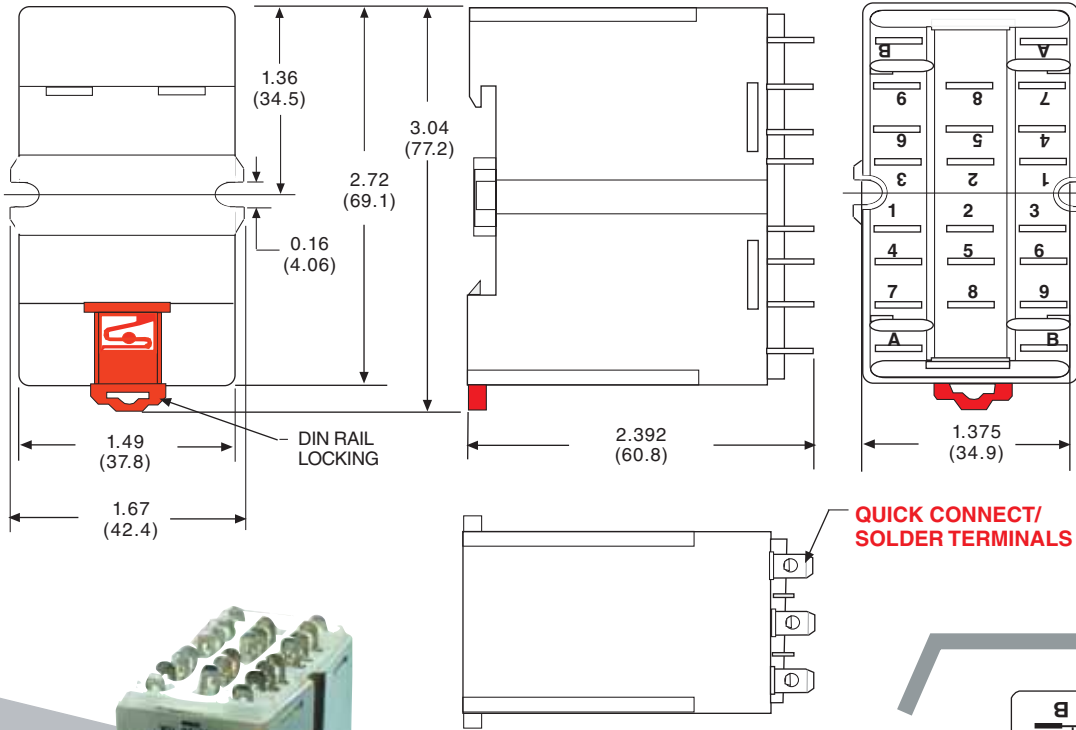

### ORDERING CODE

**F** **385** **XBX** **-240A**

#### COILS:

130°C: NO CODE,  
155°C: CODE F

#### CLASS:

385 - 15 AMPS RATING WITH  
0.187" QUICK CONNECT/  
SOLDER TERMINALS

#### CONTACT ARRANGEMENTS:

XBX: DPDT,  
XDX: 4PDT  
XFX: 6PDT

#### COIL VOLTAGE:

6, 12, 24, 120, 240 ADD "A" FOR AC COILS  
6, 12, 24, 48, 110-125 ADD "D" FOR DC COILS

STANDARD PART NUMBERS	CONTACT CONFIGURATION	COIL MEASURED @ 25 °C	
		NOMINAL INPUT VOLTAGE	NOMINAL RESISTANCE (OHMS)
<b>AC OPERATED, DUAL COIL, 15 AMP</b>			
385XDX-120A	4PDT	120 VAC	4800/4800 Ω
<b>DC OPERATED, 15 AMP</b>			
385XDX-12D	4PDT	12 VDC	85/85 Ω
385XDX-24D	4PDT	24 VDC	340/340 Ω

RETROFITS POTTER & BRUMFIELD KUB  
SEE END OF SECTION 5 FOR CROSS REFERENCE

9/04

## FEATURES

- INDUSTRIAL PLUG-IN CONSTRUCTION:
- TRANSFER ON RELEASE VERSION AVAILABLE :
- NON-STANDARD SEQUENCES AVAILABLE


## BENEFITS

- RUGGED & RELIABLE
- EXTRA LONG LIFE WHEN LOAD IS ENERGIZED ONLY WHEN THE 311'S COIL IS ON.
- CAN BE CUSTOMIZED WITH ANY SEQUENCE DIVISIBLE INTO EIGHT

## GENERAL SPECIFICATIONS (@ 25°C)

	UNITS	
<b>COIL</b>		
Pull-in Voltage AC (50/60 Hz):≤	% of nominal	85
Pull-in Voltage DC:≤	% of nominal	80
Dropout Voltage AC (50/60 Hz):≥	% of nominal	Not applicable
Dropout Voltage DC:≥	% of nominal	Not applicable
Maximum Voltage:	% of nominal	110
Resistance Tolerance:	% ±	10
Coil Power AC (50/60 Hz):	VA	5
Coil Power DC:	W	2
Insulation System		
Per UL Standard 1446:		Class B (130°C)
Duty:		Continuous
<b>CONTACTS</b>		
Contact Material:		Silver alloy
Contact Rating AC Amperes (AC1):	A	5
Contact Rating AC Voltage:	V	120
Contact Rating DC Amperes (DC1):	A	5
Contact Rating DC Voltage:	V	30
Horse Power (AC):	HP	None
Horse Power (DC):	HP	None
Pilot Duty (60 Hz):		Not applicable
Minimum Recommended Load:	ma	100 @ 5 VDC or 0.5 W
<b>TIMING</b>		
Operate Time:	ms	35
Release Time:	ms	30
<b>DIELECTRIC STRENGTH</b>		
Coil to Contacts:	V rms	1500
Across Open Contacts:	V rms	500
Pole to Pole:	V rms	1500
Contacts to Frame:	V rms	Not applicable
Insulation Resistance:	megohms minimum @VDC	1000 @ 500
<b>TEMPERATURE</b>		
Operating, AC Lower:	°C	-10
Operating, AC Upper:	°C	+60
Operating, DC Lower:	°C	-10
Operating, DC Upper:	°C	+60
Storage, Lower:	°C	-40
Storage, Upper:	°C	+105
<b>LIFE EXPECTANCY</b>		
Electrical @ Rated Load (AC1):	operations	100,000
Mechanical @ no Load :	operations	10,000,000
<b>MISCELLANEOUS</b>		
Operating Position:		Any
Insulation Material:		Molded plastic
Enclosure Material:		Clear Polycarbonate
Cover Protection Category:	IP	50
Weight:	grams	190

*THE CLASS A311 RELAY IS A SEQUENCING VERSION OF THE CLASS 219 GENERAL PURPOSE RELAY. CONTACTS TRANSFER ON EACH IMPULSE TO THE COIL. MODELS ARE AVAILABLE WITH CONTACTS TRANSFERRING WHEN COIL IS ENERGIZED OR WHEN DE-ENERGIZED. A DOUBLE CAM MOVEMENT, ONE CAM PER SNAP SWITCH, ALLOWS ONE OR BOTH CONTACTS TO BE ENERGIZED OR DE-ENERGIZED WITH THE CAM ROTATING ONE HALF STEP WHEN THE COIL IS ENERGIZED AND THE OTHER HALF STEP WHEN THE COIL IS DE-ENERGIZED ASSURES RELIABLE SEQUENCING OF THE TWO SPDT SNAP SWITCHES.*






# 311 SEQUENCE (STEPPER) RELAY




## DPDT, 5 AMPS

WIRING DIAGRAM  
(VIEWED FROM PIN END)



**A311XBXP  
A311XBXP\*  
(DPDT)  
TRANSFER ON RELEASE**

**OUTLINE DIMENSIONS**  
DIMENSIONS SHOWN IN INCHES & (MILLIMETERS).

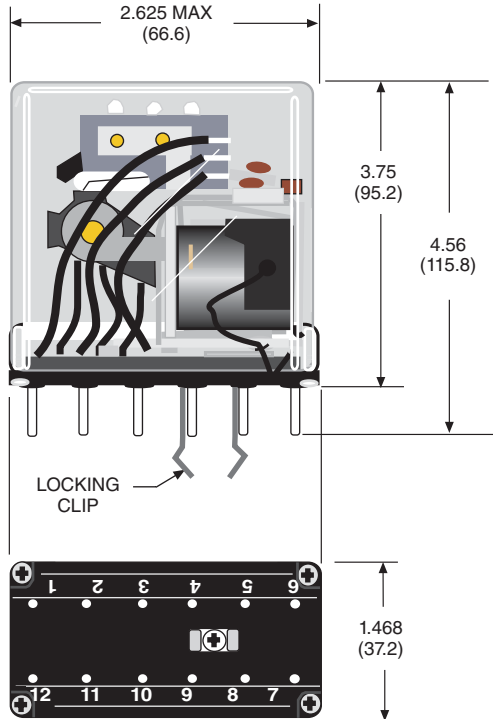

### ORDERING CODE

**A311** **XBX** **P** **R** **L** **-120A**

**CLASS:**

A311 INDUSTRIAL PLUG-IN,  
SEQUENCE RELAY,  
5 AMP, DPDT

**CONTACT ARRANGEMENTS:**

XBX: DPDT

**STANDARD FEATURES:**

PLUG-IN WITH POLYCARBONATE  
COVER: **CODE P**

**CONTACT TRANSFER:**

WHEN COIL IS ENERGIZED: **NO CODE**  
WHEN COIL IS DE-ENERGIZED: **CODE R**

**OPTIONS:**

INDICATOR LAMP: **CODE L**  
COIL SUPPRESSION: **CODE V**

**COIL VOLTAGE:**

6, 12, 24, 120, 240 **ADD "A" FOR AC COILS**  
6, 12, 24, 48, 110-125 **ADD "D" FOR DC COILS**

**Mating Socket  
27390D  
See section 7**

STANDARD PART NUMBERS	COIL MEASURED @ 25 °C	
	NOMINAL INPUT VOLTAGE	NOMINAL RESISTANCE (OHMS)
<b>AC OPERATED, 5 AMP</b>		
A311XBXP-120A	120 VAC	540 Ω
A311XBXP-240A	240 VAC	1815 Ω
A311XBXP-120A	120 VAC	540 Ω
<b>DC OPERATED, 5 AMP</b>		
A311XBXP-24D	24 VDC	250 Ω
A311XBXP-24D	24 VDC	250 Ω

# SECTION 5

## CROSS REFERENCE GUIDE

MAGNECRAFT & STRUTHERS-DUNN	POTTER & BRUMFIELD	MIDTEX
711XBXC-12D	KUR-11D15-12	619-11B200
711XBXC-24D	KUR-11D15-24	619-11C200
711XBXC-48D	KUR-11D15-48	619-11D200
711XBXC-110D	KUR-11D15-110	619-11F200
MAGNECRAFT & STRUTHERS-DUNN	IDEC	
755XBXC-24A	W250AML2CPX-8	RR2KP-U-AC24
755XBXC-120A	W250AML2CPX-9	RR2KP-U-AC120
755XBXC-240A	W250AML2CPX-10	RR2KP-U-AC240
755XBXC-12D	W250ML2CPX-6	RR2KP-U-DC12
755XBXC-24D	W250ML2CPX-7	RR2KP-U-DC24
755XBXC-110D	W250ML2CPX-8	RR2KP-U-DC110
MAGNECRAFT & STRUTHERS-DUNN	POTTER & BRUMFIELD	
W388AMLCPX-9	285XBXC-120A	KUL11A15S-120
W388MLCPX-6	285XBXC-12D	KUL11D15S-12
W388MLCPX-7	285XBXC-24D	KUL11D15S-24
W388ML2CPX-6	285XBXC-12D	KUL11D15D-12
W388ML2CPX-7	285XBXC-24D	KUL11D15D-24
MAGNECRAFT & STRUTHERS-DUNN	POTTER & BRUMFIELD	
385XDX-120A	KB-17AG-120 OR KUB-17A15-120	
385XDX-12D	KB-17DG-12 OR KUB-17D15-12	
385XDX-24D	KB-17DG-24 OR KUB-17D15-24	

### U. S. A.


MAGNECRAFT & STRUTHERS-DUNN  
700 ORANGE STREET  
DARLINGTON, SC. 29532-3739  
TEL.: (843) 393-5421 FAX: (843) 393-4123  
WEBSITE: [www.magnecraft.com](http://www.magnecraft.com)  
EMAIL: [info@magnecraft.com](mailto:info@magnecraft.com)

### EUROPE

MAGNECRAFT & STRUTHERS-DUNN  
OFFICE MUNICH  
FORSTENRIEDER ALLEE 227  
D 81476 MUNCHEN/GERMANY  
TEL.: 4989 75080310 FAX: 4989 7559344  
EMAIL: [renatesteinback@magnecraft.de](mailto:renatesteinback@magnecraft.de)

### FOR LATCHING RELAYS APPLICATION ENGINEERING ASSISTANCE

**Joe Zintel**, PRODUCT MANAGER  
FAX: (847) 441-2522  
EMAIL: [jzintel@magnecraft.com](mailto:jzintel@magnecraft.com)

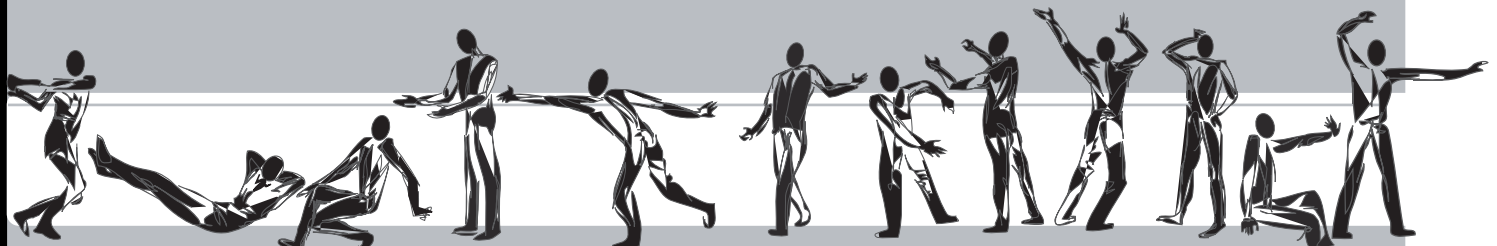

THE CROSS REFERENCE IS INTENDED TO MATCH FOOT PRINT, INTERNAL WIRING, AND CONTACT LOAD RATINGS.  
CONSTRUCTION FEATURES AND GENERAL SPECIFICATIONS SHOULD BE COMPARED IF EXACT REPLACEMENT IS REQUIRED.