

Micro Relay A / VFM A



**Description**


**Features**

- Limiting continuous currents 25/15 A at the NO/NC contacts
- Pin assignment to ISO 7588 part 3
- Positions of quick connect terminals to ISO 7588 part 3
- Compact dimensions

**Typical applications**

- Heaters (seat, front/rear windows)
- Motors (fan, pump, wiper)
- Valves, lifting magnets, interlocks
- Headlights, lighting systems

Please contact Tyco Electronics for relay application support.

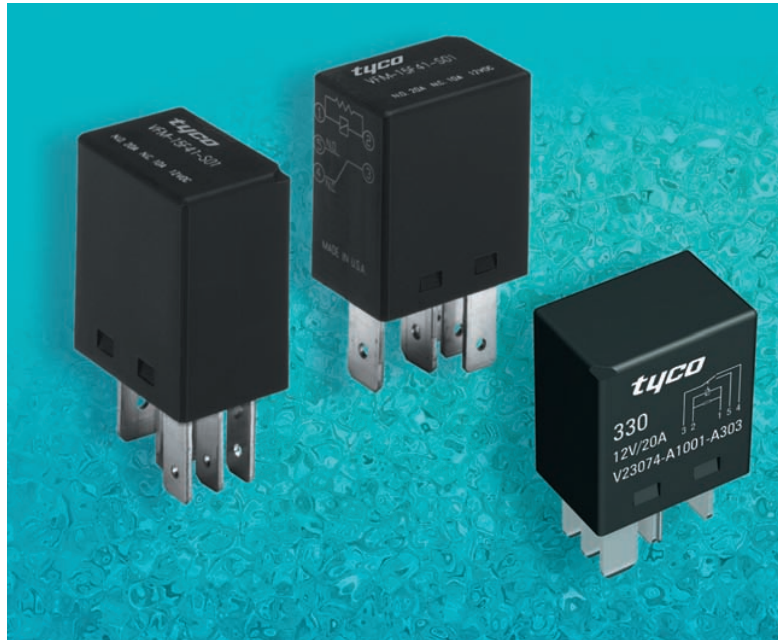

74\_kop1

**Design**

Dustproof; protection class IP 54 to IEC 529 (EN 60 529)  
Optional cover markings; color-coded

**Weight**

Approx. 0.5 - 0.7 oz. (16 - 20 g) depending on contact

**Nominal voltage**

12 V or 24 V  
other nominal voltages available on request

**Terminals**

Quick connect terminals similar to ISO 8092-1  
Coil and break contact 4.8 x 0.8 mm, other load terminals 6.3 x 0.8 mm; surfaces tin-plated  
Version with PCB terminals on request

**Accessories**

Connectors see page 190

**Special models on request**

- One integrated component: diode or varistor in parallel to the coil
- Special labels

**Conditions**

All parametric, environmental and endurance tests are performed according to EIA Standard RS-407-A at standard test conditions unless otherwise noted:

23 °C ambient temperature, 20-50% RH, 29.5 ± 1.0" Hg (998.9 ± 33.9 hPa).


Please also refer to the Application Recommendations in this catalog for general precautions.

**Disclaimer**

All technical performance data apply to the relay as such, specific conditions of the individual application are not considered. Please always check the suitability of the relay for your intended purpose. We do not assume any responsibility or liability for not complying herewith. We recommend to complete our questionnaire and to request our technical service. Any responsibility for the application of the product remains with the customer only. All specifications are subject to change without notification. All rights of Tyco are reserved.


**Micro Relay A / VFM A**

**Dimensional drawing**  
Micro Relay A / VFM A

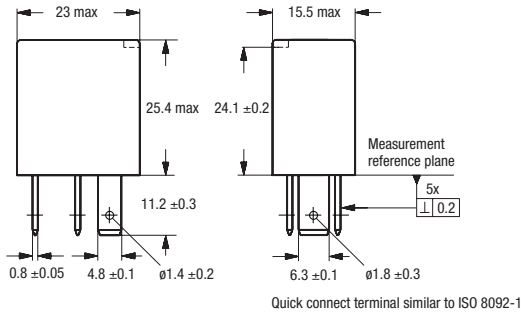


Micro A: Terminals without holes  
VFM A: Terminals with holes  
(other versions available on request)

**Terminal arrangement**  
View of the terminals (bottom view)


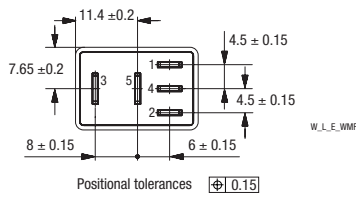


**Cover marking**


Only available for Micro Relay A on request



**Dimensional drawing**  
VFM A (PCB version on request)

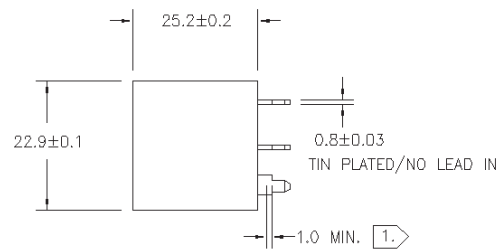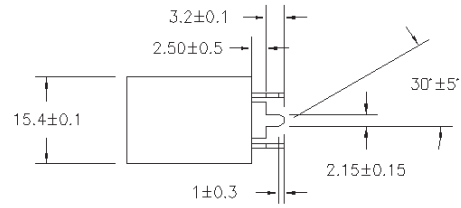

**Terminal arrangement**  
View of the terminals (bottom view)



**Micro Relay A / VFM A**

**Contact data**


Contact configuration	Make contact/ Form A		Changeover contact/ Form C	
Circuit symbol				
Rated voltage	12 V	24 V	12 V	24 V
Rated current at 85 °C	25 A	15 A	15/25 A	10/15 A
Contact material	AgSnO <sub>2</sub>			
Max. switching voltage/power	See load limit curve			
Max. switching current <sup>1)</sup>			NC/NO	NC/NO
On <sup>2)</sup>	120 A	120 A	40/120 A	20/120 A
Off	30 A	20 A	15/30 A	10/20 A
Min. recommended load <sup>3)</sup>	1 A at 5 V			
Voltage drop at 10 A (initial)	Typ. 15 mV, 200 mV max.		Typ. 15 mV, 200 mV max.	
	NO contact		NO contact	
	NC contact		NC contact	
Mechanical endurance (without load)	Typ. 10 <sup>7</sup> operations			
Electrical endurance (example of resistive load, further information on request)	> 1 x 10 <sup>5</sup> operations 25 A, 14 V	> 1 x 10 <sup>5</sup> operations 15 A, 28 V	> 1 x 10 <sup>5</sup> operations 25 A, 14 V (NO contact) > 1 x 10 <sup>5</sup> operations 15 A, 14 V (NC contact)	> 1 x 10 <sup>5</sup> operations 15 A, 28 V (NO contact) > 1 x 10 <sup>5</sup> operations 10 A, 28 V (NC contact)
Max. switching rate at nominal load	6 operations per minute (0.1 Hz)			

<sup>1)</sup> The values apply to a resistive or inductive load with suitable spark suppression and at maximum 13.5 V for 12 V or 27 V for 24 V load voltages.

<sup>2)</sup> For a load current duration of maximum 3 s for a make/break ratio of 1:10.

<sup>3)</sup> See chapter Diagnostics in our Application Recommendations on page 18 of this catalog or consult the internet at <http://relays.tycoelectronics.com/application.asp>

**Load limit curve**


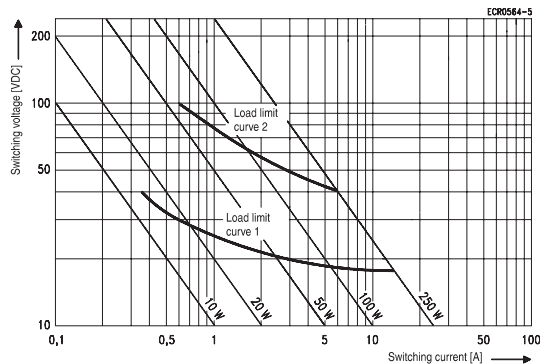


Load limit curve 1 ≙ arc extinguishes, during transit time (changeover contact)  
Load limit curve 2 ≙ safe shutdown, no stationary arc (make contact)

**Pin assignment**

1 make contact/  
1 form A

1 changeover contact/  
1 form C



Value of resistor see ordering information  
Other components in parallel to the coil  
available on request

Micro Relay A / VFM A


**Coil data**

Available for nominal voltages	12, 24 V		
Nominal power consumption at nominal voltage with suppression resistor	Micro A 12 V 1.4 W	Micro A 24 V 1.6 W	VFMA 12, 24 V 1.8 W
Test voltage winding/contact	500 VAC <sub>rms</sub>		
Ambient temperature range	- 40 to + 125 °C		
Max. switching rate without contact loading	20 Hz		
Operate time at nominal voltage	Typ. 5 ms		
Release time at nominal voltage	Typ. 3 ms		


N.B.

A low resistive suppression device in parallel to the relay coil increases the release time and reduces the lifetime caused by increased erosion and/or higher risk of contact tack welding.

**Operating voltage range**

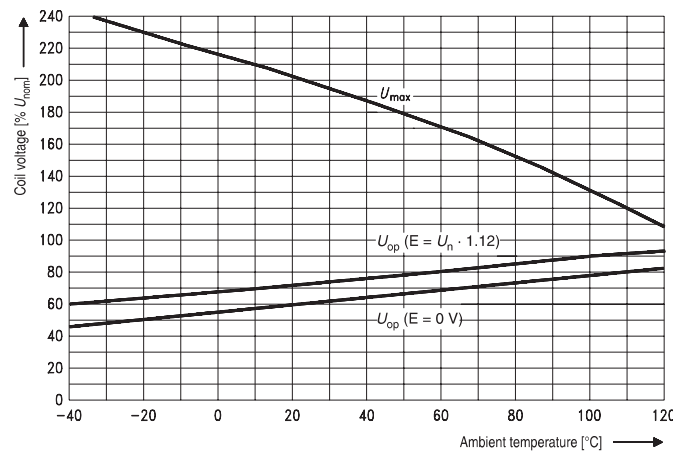

**Ambient temperature vs. coil voltage for continuous load**

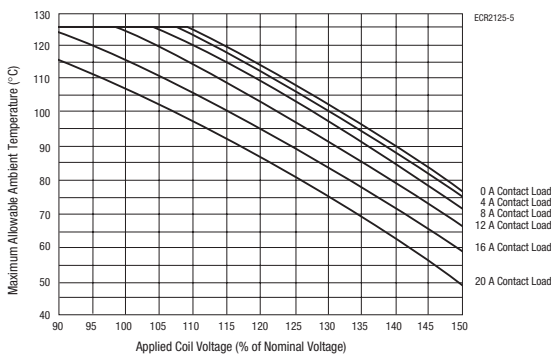

**Mechanical data**

Cover retention	
Axial force	150 N (33.8 lbs)
Pull force	150 N (33.8 lbs)
Push force	200 N (45 lbs)
Terminals	
Pull force	100 N (22.5 lbs)
Push force	100 N (22.5 lbs)
Resistance to bending, force applied to front	10 N (2.25 lbs) <sup>1)</sup>
Resistance to bending, force applied to side	10 N (2.25 lbs) <sup>1)</sup>
Torsion	0.3 Nm
Enclosures	
Dust cover	Protects relay from dust. For use in passenger compartment or enclosures.

<sup>1)</sup> Values apply 2 mm from the end of the terminal. When the force is removed, the terminal must not have moved by more than 0.3 mm.

**Micro Relay A / VFM A**

<b>Operating conditions</b>				
Temperature range, storage	Refer to <i>Storage</i> in the "Glossary"			
Test	Relevant standard	Testing as per	Dimension	Comments
Climatic cycling with condensation	EN ISO 6988		6 cycles	Storage 8/16 h
Temperature cycling	IEC 68-2-14	Nb	10 cycles	- 40/+ 85 °C (5 °C per min.)
Damp heat				
cyclic	IEC 68-2-30	Db, Variant 1	6 cycles	Upper air temperature 55 °C
constant	IEC 68-2-3	Ca	56 days	
Corrosive gas	IEC 68-2-42	10 ± 2 cm <sup>3</sup> /m <sup>3</sup> SO <sub>2</sub>	10 days	
	IEC 68-2-43	1 ± 0.3 cm <sup>3</sup> /m <sup>3</sup> H <sub>2</sub> S	10 days	
Vibration resistance	IEC 68-2-6 (sine sweep)		10-500 Hz min. 5 g	No change in the switching state > 10 μs Valid for NC contacts, NO contact values significantly higher
Shock resistance	IEC 68-2-27 (half sine pulse form)		min. 20 g 11 ms	
Load dump	ISO 7637-1 (12 V) ISO 7637-2 (24 V)	Test pulse 5 Test pulse 5	Vs =+ 86.5 V Vs =+ 200 V	
Jump start	24 V for 5 minutes conducting nominal current at 23 °C			
Drop test	Capable of meeting specifications after 1.0 m (3.28 foot) drop onto concrete			
Flammability	UL94-HB or better (meets FMVSS 302) <sup>1)</sup>			
Overload current <sup>2)</sup>	34 A, 1800 s 50 A, 5 s 87.5 A, 0.5 s 150 A, 0.1 s			

<sup>1)</sup> FMVSS: Federal Motor Vehicle Safety Standard.

<sup>2)</sup> Current and time are compatible with circuit protection by a typical 25 A automotive fuse. Relay will make, carry and break the specified current.

**Ordering information (Production in Europe and Asia)**

<b>Part numbers</b> (see table below for coil data)		<b>Contact arrangement</b>	<b>Contact material</b>	<b>Enclosure</b>	<b>Terminals</b>
<b>Relay part number</b>	<b>Tyco order number</b>				
<b>12 V Plug-In relays<sup>1)</sup></b>					
V23074-A1001-A402	1393292-5	1 Form A	AgSnO2	Dust cover	Quick connect
V23074-A1001-A403	8-1393292-4	1 Form C	AgSnO2	Dust cover	Quick connect
<b>24 V Plug-In relays<sup>1)</sup></b>					
V23074-A1002-A402	8-1393292-9	1 Form A	AgSnO2	Dust cover	Quick connect
V23074-A1002-A403	3-1393292-8	1 Form C	AgSnO2	Dust cover	Quick connect

<sup>1)</sup> Versions with diode or varistor in parallel to the coil on request. Versions with special labels or color shapes on request

**Coil versions**

<b>Coil designator for Micro A (with Resistor)</b>	<b>Rated coil voltage (V)</b>	<b>Coil resistance <sup>2)</sup> ± 10% (Ω)</b>	<b>Must operate voltage (V)</b>	<b>Must release voltage (V)</b>	<b>Allowable overdrive <sup>1)</sup> voltage (V)</b>	
					<b>at 23 °C</b>	<b>at 85 °C</b>
V23074-**001-****	12	105	7.2	1.8	24	18
V23074-**002-****	24	354	14.4	3.6	45	33

<sup>1)</sup> Allowable overdrive is stated with no load applied and minimum coil resistance..

<sup>2)</sup> Including parallel resistor.

**Standard delivery packs (orders in multiples of delivery pack)**

Micro Relay A: 480 pieces

Micro Relay A / VFM A

Ordering information (Production in USA only)

Part numbers (see table below for coil data)		Contact arrangement	Contact material	Enclosure	Terminals
Relay part number	Tyco order number				
VFMA-11F41-S01	9-1393292-9	1 Form A	AgSn02	Dust cover	Quick connect
VFMA-15F41-S01	1393293-8	1 Form C	AgSn02	Dust cover	Quick connect
VFMA-21F41-S01	1432503-1	1 Form A	AgSn02	Dust cover, Sealed	Quick connect
VFMA-25F41-S01	1432506-1	1 Form C	AgSn02	Dust cover, Sealed	Quick connect
VFMA-21F42-S01	1432502-1	1 Form A	AgSn02	Dust cover, Sealed	Printed circuit

**Coil versions**

Coil designator for VFM A (without resistor)	Rated coil voltage (V)	Coil resistance ± 10% (Ω)	Must operate voltage (V)	Must release voltage (V)	Allowable overdrive <sup>1)</sup> voltage (V)	
					at 23 °C	at 85 °C
VFMA-**F**-S01 <sup>2)</sup>	12	80	7.2	1.2	20	15
VFMA-**H**-S02 <sup>2)</sup>	24	318	14.4	2.4	40	30

<sup>1)</sup> Allowable overdrive is stated with no load applied and minimum coil resistance.

<sup>2)</sup> Coil suppression suffix: S01 for 12 V (680 Ω parallel resistor), S08 for 24 V (2700 Ω parallel resistor).

**Standard delivery packs** (orders in multiples of delivery pack)

VFM A: 600 pieces