



Solving your relay requirements since 1922

Amperite Co.
567 52nd Street
P.O. Box 329
West New York, NJ 07093
(800) 752-2329
www.Amperite.com

DC10 Series TDR



- ... Solid state CMOS digital circuitry
- ... Triggered delay on release timing mode
- ... DPDT (2 form C) isolated 10 ampere relay contacts
- ... Timing selection: Knob adjustable or Fixed
- ... Numerous models timing from 0.1 secs. to 1000 hours
- ... UL File #E96739 (M)
- ... CSA File #LR62586

Timing Mode:

Delay on operate timing cycle begins upon application of input power. The relay contacts transfer at the end of the delay period and will remain transferred until input voltage is removed. Reset occurs when input voltage is removed.

Timing diagram:



Contact Information:

Arrangement: 2 form C (DPDT) - Diagram C

Contact Material: Silver - Cadmium Oxide

Rating (Resistive):

10A @ 240V AC Resistive

15A @ 30V DC Resistive

15A @ 120V AC Resistive

1/3 HP @ 120V AC

1/2 HP @ 250V AC

Expected Life @ 25°C: 10 Million operations, Mechanical; 100,000 operations minimum at rated loads.

Environmental Information:

Temperature Range:

Storage: -60°C to +105°C (-76°F to +221°F)

Operating: -45°C to +70°C (-49°F to +158°F)



Solving your relay requirements since 1922

Amperite Co.
567 52nd Street
P.O. Box 329
West New York, NJ 07093
(800) 752-2329
www.Amperite.com

Mechanical Information:


Termination: 8 pin Octal Style Plug or 11 pin spade terminals (Diagram C & D)

Enclosure: White plastic case. Knob adjustable models have a dial scale for reference only.

Weight: 4 oz (114g) approx.

Outline Dimensions: (Octal Style):

Please contact us for information on 11-pin spade terminal style (LDC10).

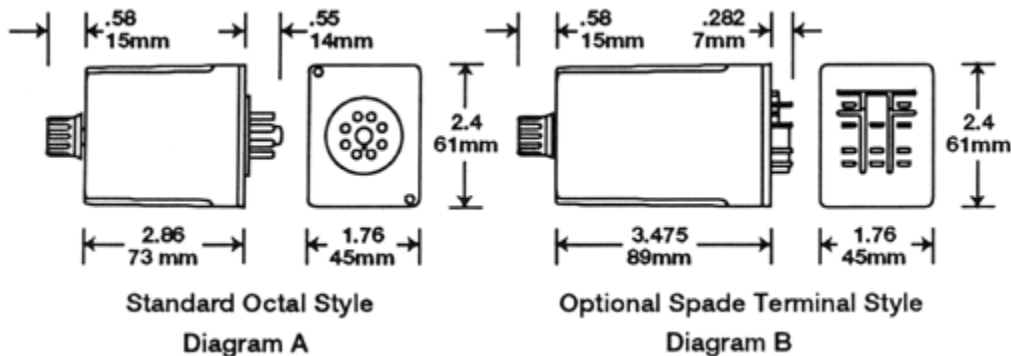

Timing Specification:

Timing - Fixed: 0.1 sec. through 1000 hours.

Timing Ranges: Standard timing ranges are as follows:

.1 to 10 secs., 1 to 30 secs., 1.8 to 180 secs., 5 to 300 secs., 1 to 60 mins., 1 to 60 hours.

Custom timing is available.

Timing Adjustment: Knob adjustable potentiometer.

Timing Tolerance: Fixed Units: $\pm 5\%$; 1% units are available at extra cost.

Adjustable Units: -0 to +10% of maximum specified delay time.

Minimum specified value or less at low end.

Repeatability: $\pm 1\%$

Release Time: 60 ms typical, 100 ms maximum

Timing Cycle Interrupt Transfer: None

Reset: Upon interruption of power

Initial Dielectric Strength:

Between open contacts: 1000V RMS, Between adjacent contacts: 1500V RMS,

Between contacts & coil: 1500V RMS

Input Information:

Voltage: AC units- 12V, 24V, and 120V; DC units: 12V, 24V, 48V, and 110V. Other voltages are available.

Power Requirement: AC units: 3 VA or less, DC units: 3 Watts or less

Transient Protection: 1 Joule MOV

Polarity Protection: On DC units - Yes





Solving your relay requirements since 1922

Amperite Co.
567 52nd Street
P.O. Box 329
West New York, NJ 07093
(800) 752-2329
www.Amperite.com

Input Voltages & Limits:

Nominal	Minimum	Maximum
12V AC	10V	14V
24V AC	20V	28V
120V AC	105V	130V
12V DC	11V	14V
24V DC	20V	32V
48V DC	41V	55V
110V DC	95V	125V

Wiring Diagrams:

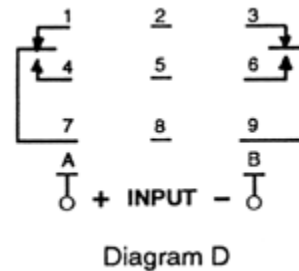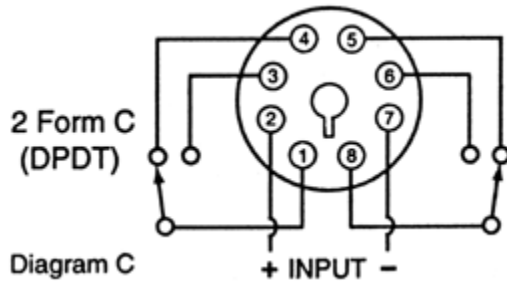


Ordering Information:

Definition of a part number for the Amperite DC10 Series Time Delay Relay.

Example:

120 A P 1 -60 S L DC
 ↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑
 A B C D E F G H

A: Denotes nominal input voltage. Voltages available: 12, 24 & 120V AC; 12, 14, 48, & 110V DC, Custom voltages are available.

	<p>Amperite Co. 567 52nd Street P.O. Box 329 West New York, NJ 07093 (800) 752-2329 www.Amperite.com</p>
---	---

B: Denotes type of input current required for operation:

A = AC - Alternating Current, D = DC - Direct Current

C: Denotes contact form: P= DPDT - 2 form C.

D & E: Denotes range of knob adjustability for timing (in seconds, minutes or hours)

where:

D= Minimum time delay. E= Maximum time delay for adjustable TDR'S.

Note:

- 1.) Ranges available: See standard timing ranges above. Custom timing is available.
- 2.) Both values (D & E) can be replaced by a single value for a factory preset time delay in seconds, minutes or hours from 0.1 secs. through 1000 hours.

F: Denotes use of seconds, minutes or hours in timing value(s), S = seconds, M = minutes, H = hours.

G: Enter "L" if optional 11-pin spade terminals are required (Diagram D). Contact us for dimensional differences.

H: Denotes use of solid state digital circuitry of DC10 Series.

