


Panasonic

ideas for life

**General use and economy type.
DIP (2 Form A) 8-pin type.
Reinforced insulation
5,000V type.**

**GU-E PhotoMOS
(AQW21OEH)**

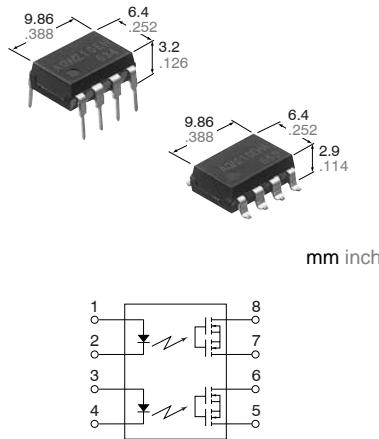

FEATURES

1. Reinforced insulation 5,000 V type

More than 0.4 mm internal insulation distance between inputs and outputs. Conforms to EN41003, EN60950 (reinforced insulation).

2. Compact 8-pin DIP size

The device comes in a compact (W)6.4×(L)9.86×(H)3.2 mm (W).252×(L).388×(H).126 inch, 8-pin DIP size (through hole terminal type).

3. Applicable for 2 Form A use as well as two independent 1 Form A use

4. Controls low-level analog signals

PhotoMOS relays feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

5. High sensitivity, high speed response.

Can control a maximum 0.14 A load current with a 5 mA input current. Fast operation speed of 0.5 ms (typical). (AQW21OEH)

6. Low-level off state leakage current

TYPICAL APPLICATIONS

- Modem
- Telephone equipment
- Security equipment
- Sensors

TYPES

Type	I/O isolation voltage	Output rating*		Part No.			Packing quantity	
				Through hole terminal	Surface-mount terminal			
		Load voltage	Load current	Tube packing style	Tape and reel packing style	Tube	Tape and reel	
AC/DC type	Reinforced 5,000 V	60 V	500 mA	AQW212EH	AQW212EHA	AQW212EHAX	AQW212EHAZ	1 tube contains 40 pcs. 1 batch contains 400 pcs.
		350 V	120 mA	AQW210EH	AQW210EHA	AQW210EHAX	AQW210EHAZ	
		400 V	100 mA	AQW214EH	AQW214EHA	AQW214EHAX	AQW214EHAZ	
		600 V	40 mA	AQW216EH	AQW216EHA	AQW216EHAX	AQW216EHAZ	

*Indicate the peak AC and DC values.

Note: For space reasons, the SMD terminal shape indicator "A" and the package style indicator "X" or "Z" are not marked on the relay.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	AQW212EH(A)	AQW210EH(A)	AQW214EH(A)	AQW216EH(A)	Remarks	
Input	LED forward current	I _F	50mA				f =100 Hz, Duty factor = 0.1%	
	LED reverse voltage	V _R			5V			
	Peak forward current	I _{FP}	1A					
	Power dissipation	P _{in}			75mW			
Output	Load voltage (peak AC)	V _L	60 V	350 V	400 V	600 V	Peak AC, DC (): in case of using only 1 channel	
	Continuous load current (peak AC)	I _L	0.5 A (0.6 A)	0.12 A (0.14 A)	0.1 A (0.13 A)	0.04 A (0.05 A)		
	Peak load current	I _{peak}	1.5 A	0.36 A	0.3 A	0.15 A		
	Power dissipation	P _{out}	800mW					
Total power dissipation		P _T	850mW					
I/O isolation voltage		V _{iso}	5,000 V AC					
Temperature limits	Operating	T _{opr}	−40°C to +85°C −40°F to +185°F				Non-condensing at low temperatures	
	Storage	T _{stg}	−40°C to +100°C −40°F to +212°F					

GU-E PhotoMOS (AQW21OEH)


2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	AQW212EH(A)	AQW210EH(A)	AQW214EH(A)	AQW216EH(A)	Condition
Input	LED operate current	Typical	I _{Fon}	1.2mA			I _L =Max.	
		Maximum		3.0mA			I _L =Max.	
Output	LED turn off current	Minimum	I _{Foff}	0.4mA			I _L =Max.	
		Typical		1.1mA			I _F =50mA	
Transfer characteristics	LED dropout voltage	Typical	V _F	1.25 V (1.14 V at I _F =5mA)			I _F =50mA	
		Maximum		1.5V			I _F =50mA	
Output	On resistance	Typical	R _{on}	0.83Ω	18Ω	26Ω	52Ω	I _F =5mA
		Maximum		2.5Ω	25Ω	35Ω	120Ω	I _F =Max. Within 1 s on time
Transfer characteristics	Off state leakage current	Maximum	I _{Leak}	1μA				I _F =0mA V _L =Max.
		Typical	T _{on}	1ms	0.5ms			I _F =5mA
Transfer characteristics	Turn on time*	Maximum		4ms	2.0ms			I _L =Max.
		Typical	T _{off}	0.08ms			0.04ms	I _F =5mA
Transfer characteristics	Turn off time*	Maximum		1.0ms			I _L =Max.	I _F =5mA
		Typical	C _{iso}	0.8pF			f =1MHz V _B =0V	
Transfer characteristics	I/O capacitance	Maximum		1.5pF			f =1MHz V _B =0V	
		Minimum	R _{iso}	1,000MΩ			500V DC	

Note: Recommendable LED forward current I_F= 5 to 10mA.

Type of connection

*Turn on/Turn off time

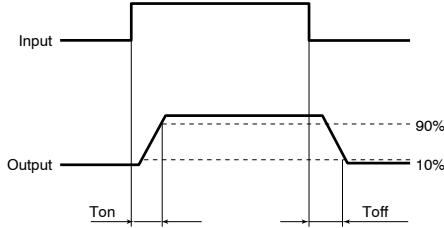

Dimensions


Schematic and Wiring Diagrams

Cautions for Use

REFERENCE DATA


1-(1). Load current vs. ambient temperature characteristics

Allowable ambient temperature: -20°C to +85°C
-40°F to +185°F

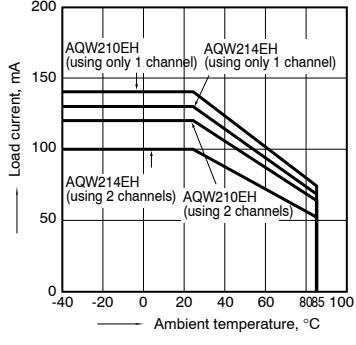


1-(2). Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F

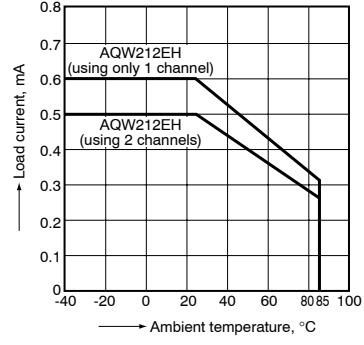


1-(3). Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F

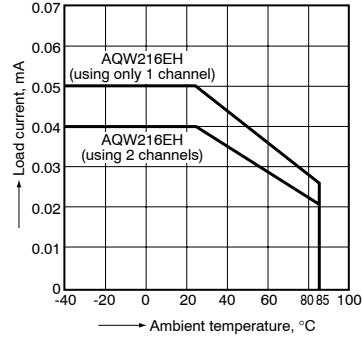


GU-E PhotoMOS (AQW21OEH)


2-(1). On resistance vs. ambient temperature characteristics
Measured portion: between terminals 5 and 6, 7 and 8;
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

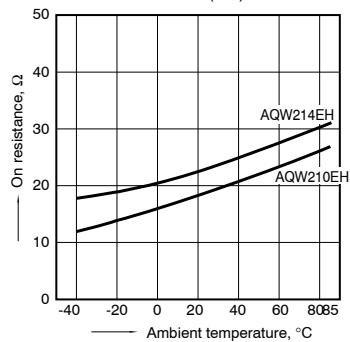


2-(2). On resistance vs. ambient temperature characteristics
Measured portion: between terminals 5 and 6, 7 and 8;
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)




2-(3). On resistance vs. ambient temperature characteristics
Measured portion: between terminals 5 and 6, 7 and 8;
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)




3. Turn on time vs. ambient temperature characteristics
Sample: All types
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)




4. Turn off time vs. ambient temperature characteristics
Sample: All types
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)




5. LED operate current vs. ambient temperature characteristics
Sample: All types; Load voltage: Max. (DC);
Continuous load current: Max. (DC)




6. LED turn off current vs. ambient temperature characteristics
Sample: All types; Load voltage: Max. (DC);
Continuous load current: Max. (DC)




7. LED dropout voltage vs. ambient temperature characteristics
Sample: All types; LED current: 5 to 50 mA

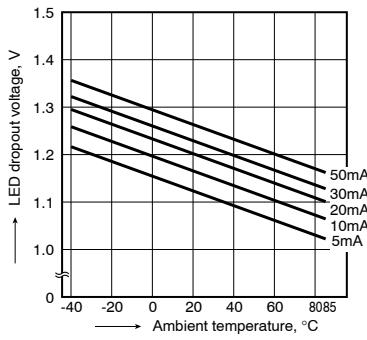


8-(1). Current vs. voltage characteristics of output at MOS portion
Measured portion: between terminals 5 and 6, 7 and 8;
Ambient temperature: 25°C 77°F




8-(2). Current vs. voltage characteristics of output at MOS portion
Measured portion: between terminals 3 and 4;
Ambient temperature: 25°C 77°F



8-(3). Current vs. voltage characteristics of output at MOS portion
Measured portion: between terminals 3 and 4;
Ambient temperature: 25°C 77°F




9-(1). Off state leakage current vs. load voltage characteristics
Measured portion: between terminals 5 and 6, 7 and 8;
Ambient temperature: 25°C 77°F

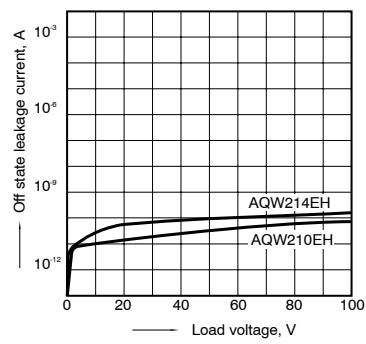


GU-E PhotMOS (AQW21OEH)


9-(2). Off state leakage current vs. load voltage characteristics
 Measured portion: between terminals 5 and 6, 7 and 8;
 Ambient temperature: 25°C 77°F

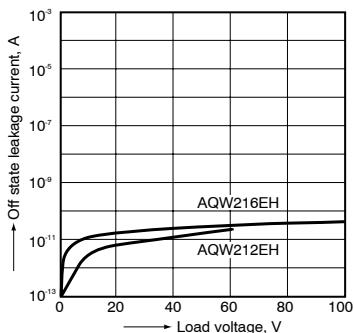


10. Turn on time vs. LED forward current characteristics
 Sample: All types
 Measured portion: between terminals 5 and 6, 7 and 8;
 Load voltage: Max. (DC); Continuous load current:
 Max. (DC); Ambient temperature: 25°C 77°F

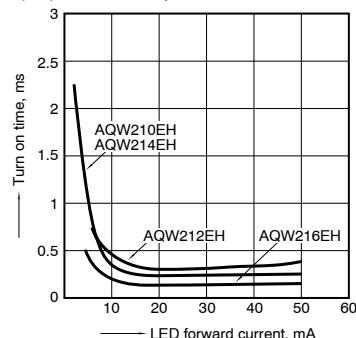

11. Turn off time vs. LED forward current characteristics
 Sample: All types
 Measured portion: between terminals 5 and 6, 7 and 8;
 Load voltage: Max. (DC); Continuous load current:
 Max. (DC); Ambient temperature: 25°C 77°F

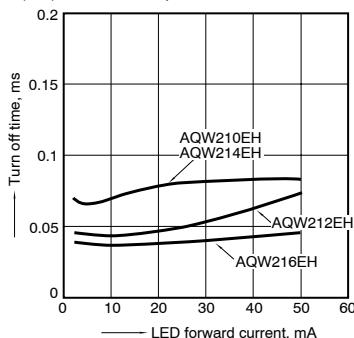

12-(1). Output capacitance vs. applied voltage characteristics
 Measured portion: between terminals 5 and 6, 7 and 8;
 Frequency: 1 MHz; Ambient temperature: 25°C 77°F

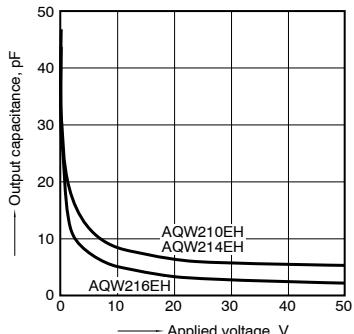

12-(2). Output capacitance vs. applied voltage characteristics
 Measured portion: between terminals 5 and 6, 7 and 8;
 Frequency: 1 MHz; Ambient temperature: 25°C 77°F

