



PRELIMINARY DATA

Page 1/5 UK

**MOSFET BASED
DC SOLID-STATE RELAY**



- ▶ Latest MOSFET technology generation.
- ▶ Ultra low on-state resistance.
- ▶ Low output leakage current.
- ▶ Low control current consumption.
- ▶ Built-in overvoltage protection
- ▶ Reverse protected triggered control input to avoid linear control risks
- ▶ No radiated or conducted disturbances
- ▶ Touch protected housing IP20

SOM020200



SOM020200	
Control voltage range	3.5-32VDC
Max. permanent output voltage	110VDC
Max. load current with heatsink	20ADC

Load voltage range	Load current range	Control input voltage range	In & case / Out Insulation	Connections	Dimensions (WxHxD)	Weight
5-110VDC	Up to 20A (with heatsink)	3.5-32VDC	2.5kV	Screw terminals	45 x 58.5 x 30	80g

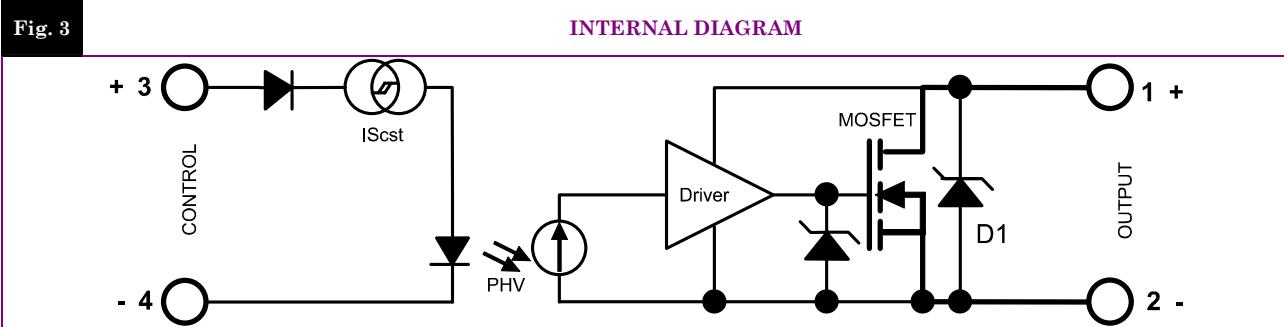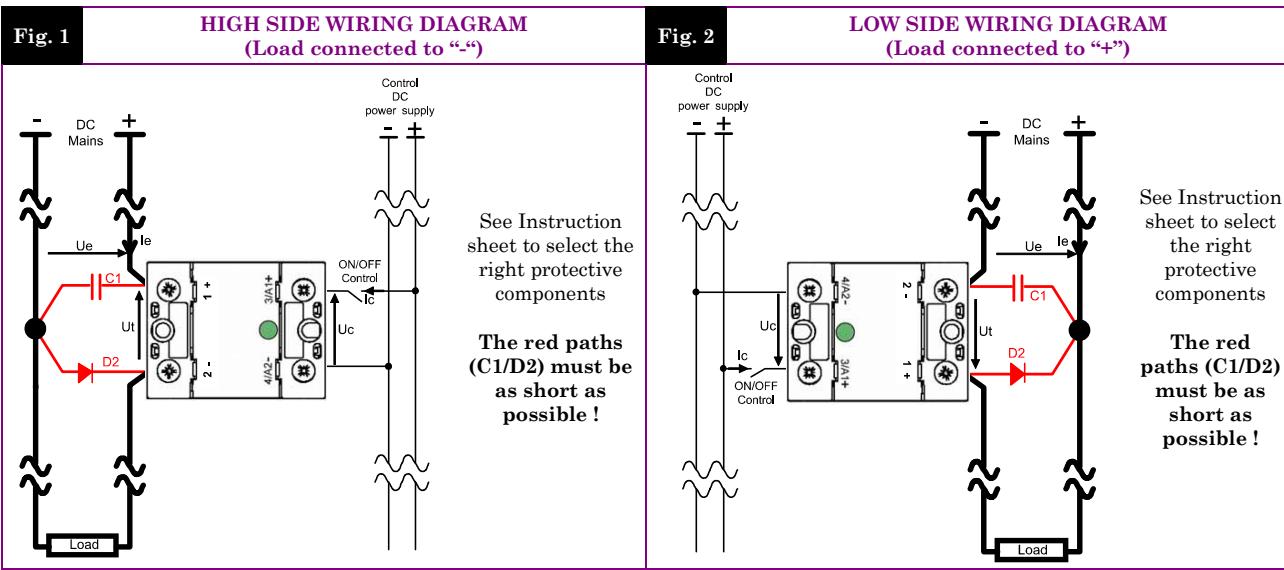

Proud to serve you

Data given at Tambient=25°C and subject to modification without previous notice

celduc®
relais



PRELIMINARY DATA

Page 2/5 UK

CONTROL INPUT CHARACTERISTICS

INPUT CIRCUIT	CHARACTERISTIC	LABEL	VALUE	INFO.
	Nom. Control voltage	Uenom	12-24VDC	
	Min. Control current	Iemin	35mAADC	-100µA/°C
	Control voltage range	Uc	3.5 - 32VDC	typical ON=3.3V
	Control current consumption	Ic	32 - 35mAADC (for control voltage range)	See fig. 5
	Releasing control voltage	Ucoffmax	1VDC	typical OFF= 2.6V
	Max. reverse control voltage	-Uemax	32VDC	-Icmax<100µA
	Input impedance	Rin	Current limitation	See fig. 5

POWER OUTPUT CHARACTERISTICS

POWER CIRCUIT	CHARACTERISTIC	LABEL	VALUE	INFO.				
	Nominal voltage	Uenom	90VDC					
	Voltage range	Ut Ue	5-110VDC					
	Non-repetitive peak voltage	Utp	200V					
	Overvoltage protection	D1	Varistor 75V size 20					
	Max reverse voltage drop (internal diode at OFF state)	-Ut	1.5V	@Ie=-20A @Uc=0				
	Maximum nominal currents	Ie max	<table border="1"> <tr> <td>Resistive</td> <td>Motor</td> </tr> <tr> <td>20A</td> <td>Please contact us</td> </tr> </table>	Resistive	Motor	20A	Please contact us	See fig. 7 (limits)
Resistive	Motor							
20A	Please contact us							
	Non-repetitive peak overload current	Iepeak	160A	See fig. 8				
	Min. load current	Iemin	5mA					
	Max. leakage current	Ielk max	3mA	@Utmax @Tjmax				
	Max. on-state resistance	RDSon	90mΩ	@Iemax @Tjmax				
	Typ. output capacitance	Cout	0.6nF					
	Junction/case thermal resistance per power element	Rthjc	1.2 K/W					
	Built-in heatsink thermal resistance vertically mounted	Rthra	10K/W	@ΔTra=75°C				
	Heatsink thermal time constant	Tthra	10 minutes	@ΔTra=50°C				
	Control inputs/power outputs insulation voltage	Uimp	2.5kV					
	Inputs/case insulation voltage	Uimp	2.5kV					
	Outputs/case insulation voltage	Uimp	2.5kV					
	Isolation resistance	Rio	1GΩ					
	Isolation capacitance	Cio	<8pF					
	Maximum junction temperature	Tjmax	175°C					
	Storage ambient temperature	Tstg	-40->+100°C					
	Operating ambient temperature	Tamb	-25->+90°C	See fig. 7				
	Max. case temperature	Tc	100°C					

PROTECTION CHARACTERISTICS

PROTECTION	Leakage current (Ielk) vs DC voltage (Ut)	Absolute limits
	<p>Ielk : Leakage current of the relay Ie : User load nominal current Utp : Relay max. non repetitive peak voltage</p>	<p>Absolute limits</p> <p>Ut (V) : DC voltage Utp : Peak voltage limit Uto : User DC power supply voltage Utmax : Max. nominal voltage of the relay Utmin : Min. voltage of the relay t : Overvoltage duration T : Time between 2 overvoltage</p> <p>$U_{to} < U_{tp}$</p> $t_{max} = \frac{0.75}{(U_{to} - U_{t\ max}) \times I_e}$ $P_{(protection)} = I_e W_{\ max}$ $\Rightarrow \frac{(U_{to} - U_{t\ max}) \times I_e \times t}{T} \leq 1$
	<p>Ielk : Leakage current of the relay Ie : User load nominal current Utp : Relay max. non repetitive peak voltage</p>	<p>Utmax : Max. nominal voltage of the relay Uto : Possible overvoltage above Utmax Utmin : Min. voltage of the relay t : Overvoltage duration T: Time between 2 overvoltage</p>




PRELIMINARY DATA

Page 3/5 UK

TIME CHARACTERISTICS

Fig. 4

TIME DIAGRAMS

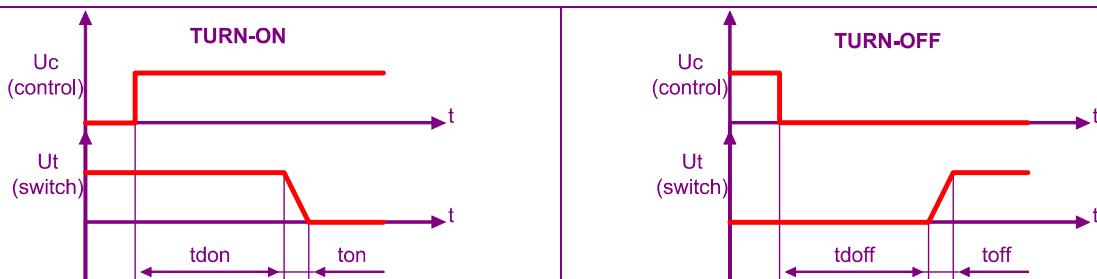

TIME CHAFACT.	CHARACTERISTIC	LABEL	VALUE	INFO.
	Turn on time	ton	20µs	
	Turn on delay	tdon	20µs	
	Turn off time	toff	20µs	
	Turn off delay	tdoff	20µs	
	Max. On-Off frequency	F(on-off)	>1000Hz (for high frequency, take 2 x Ie to calculate the heatsink; the protections must be chosen carefully)	Refer to the instruction sheet

GENERAL INFORMATION

CONNEX- TIONS	Connections	Power	Control	
	Screwdriver advised		POZIDRIV2	
	Min and max tightening torque	2 N.m	1.2 N.m	
	Insulated crimp terminals (round tabs, eyelet type)	M5	M4	

MISC.	Display	Green LED (indicates relay has switched ON)	
	Housing	UL94V0	
	Mounting	2 screws (M4x12mm ; tightening = 1.2N.m)	See mounting sheet
	Noise level	None	
	Weight	80g	

STANDARDS

GENERAL	Standards	IEC60947-1	
	Protection level	IP20	
	Protection against direct touch	Yes	
	CE marking	Yes	
	UL, cULUS and VDE approvals	Pending	

E.M.C. IMMUNITY	TYPE OF TEST	STANDARD	LEVEL	EFFECT
	E.S.D. (Electrostatic discharges)	EN61000-4-2	Pending	?
	Radiated electromagnetic fields	EN61000-4-3	Pending	?
	Fast transients bursts	EN61000-4-4	Pending	?
	Electric shocks	EN61000-4-5	Pending	?
	Voltage drop	EN61000-4-11	-	

E.M.C. EMISSION	Radiated and conducted disturbances	NFEN55011	Pending	



PRELIMINARY DATA

Page 4/5 UK

CHARACTERISTIC CURVES

Fig. 5

INPUT CHARACTERISTIC

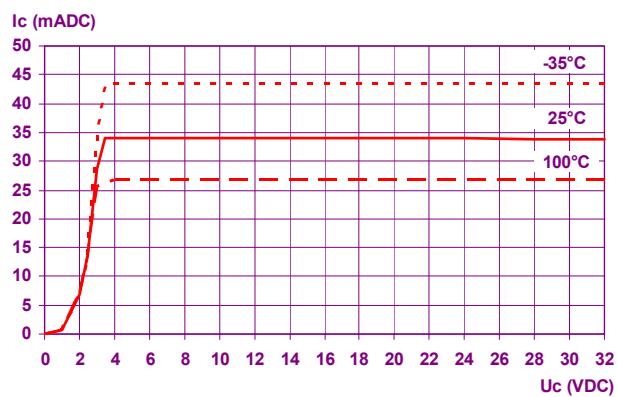


Fig. 6

ON RESISTANCE VS JUNCTION TEMPERATURE

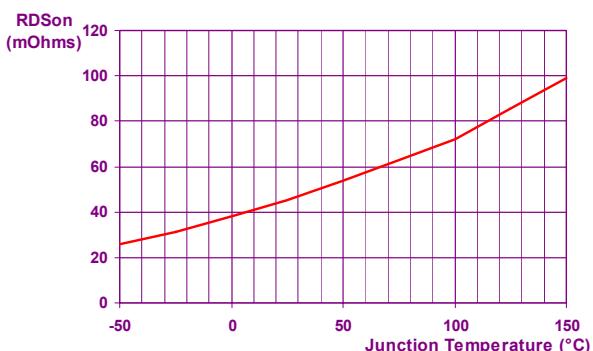


Fig. 7

POWER DISSIPATED AND LOAD CURRENT LIMIT VS TEMPERATURE

Permanent current
Ie (ARMS)

Please refer to the installation notice for precautions
about mounting the device on a heatsink.

Power dissipated
(W)



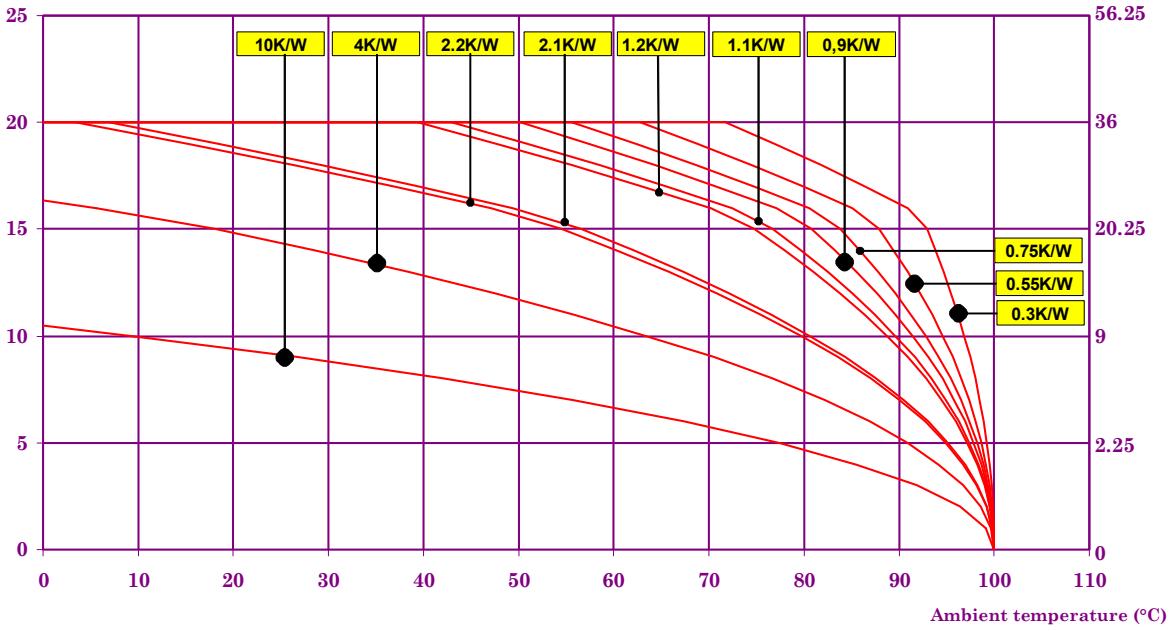


Fig. 8

PEAK OVERLOAD CURRENT vs. PULSE DURATION CHARACTERISTIC

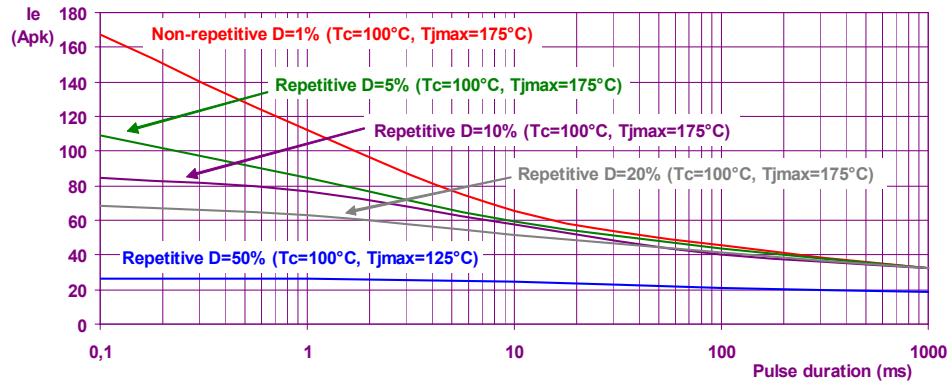



PRELIMINARY DATA

Page 5/5 UK

DIMENSIONS AND ACCESSORIES

Fig. 9

DIMENSIONS (mm)




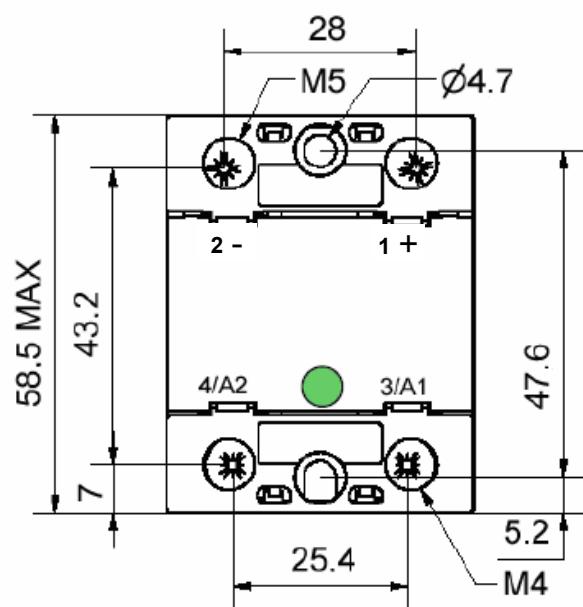


Fig.
10

ACCESSORIES

FASTON : Please contact us

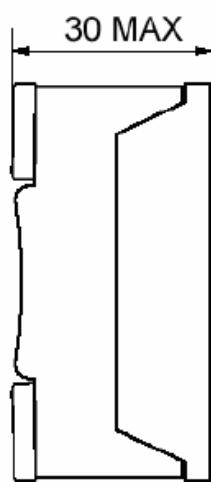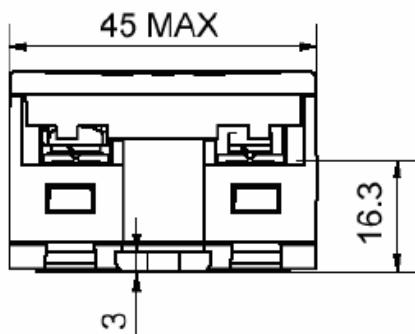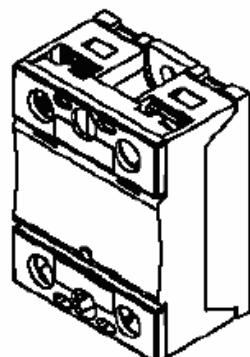

ISO 9001
N° 1993/1106a

ASSOCIATION
FRANÇAISE POUR
L'ASSURANCE DE
LA QUALITÉ

celduc®
relais

www.celduc.com

Rue Ampère B.P. 4 42290 SORBIERS - France

Phone : 33 (0) 4 77 53 90 20 Fax : 33 (0) 4 77 53 85 51 Email : celduc-relais@celduc.com