

## EAO Product Information

Series 19

**eao** ■



**Description ..... 5**

**Product Assembly ..... 6**

**Devices raised mounting ..... 7**

**Accessories..... 8**

**Technical Data..... 12**

**Drawings..... 14**

**Index..... 17**

## Product Information

### General notes

The series contains indicators and illuminated pushbuttons with maintained and momentary action and one contact which may be normally closed or normally open (snap-action element for closing). The illuminated pushbuttons are fitted with snap-action or low-level switching systems.

The front dimensions are 9 x 9 mm or 9 mm dia.

### Mounting

Mounting from the front through the mounting hole is assured even when the wiring has already been attached.

The units are equipped with soldering/plug-in terminals.

### Lenses

The flat lenses, made of polycarbonate, are obtainable in various colours. The transparent lens is available with translucent or transparent support.

### Marking

A limited amount of marking can be provided.

### Illumination

Perfect illumination of the different coloured lenses is assured by filament lamps Bi-Pin T1 longlife (6 - 24 V) or LED bi-pin T1. LED are available in the colours white, red, yellow, orange and green.

Luminosity and wave length scattering caused by the technology used in the LED manufacturing processes may lead to visual differences in our products.

### Position indication

The status of a maintained action switch can be determined by the position of the lens.

## Specimen order

### Indicator :

- Indicator actuator, 9 mm dia., soldering terminal 19-030.005

### Essential accessories :

- Lens plastic blue, transparent, flush, 9 mm dia. 19-931.6
- Single-LED, T1 Bi-Pin, 3.6 VDC, weiss 10-2603.3179C

*We reserve the right to modify technical data  
All dimensions in mm*

## Pushbutton illuminative, raised mounting





- 1 Lens
- 2 Switch housing
- 3 Fixing nut

## Indicator actuator



### Essential Accessories:


-  Lens page 8
-  Single-LED page 10

	Front protection	Terminals	9 x 9 mm Typ-Nr.	Ø 9 mm Typ-Nr.	Component layout	Mounting dimensions	Technical drawing	Circuit drawing	
<b>Indicator actuator</b> Mounting depth : 25 mm	IP 40	S/P	<b>19-050.005</b>	<b>19-030.005</b>	1	1	1	1	0.001
Mounting depth : 33 mm	IP 40	S/P	<b>19-051.005</b>	<b>19-031.005</b>	1	1	3	1	0.002



Terminals: S/P = Soldering-/plug-in terminal

Component layout from page 14, Mounting dimensions from page 14, Technical drawing from page 14, Circuit drawing from page 15
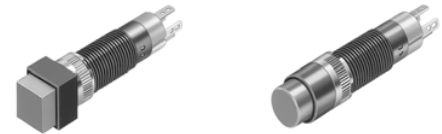
## Illuminated pushbutton actuator



### Essential Accessories:

-  Lens page 8
-  Single-LED page 10

	Front protection	Switching system	Contact material	Contacts	Switching action	Terminals	9 x 9 mm Typ-Nr.	Ø 9 mm Typ-Nr.	Component layout	Mounting dimensions	Technical drawing	Circuit drawing	
<b>Illuminated pushbutton actuator</b>	IP 40	LL	Au	1 NC	MA	S/P	<b>19-482.035</b>	<b>19-472.035</b>	2	1	2	2	0.002
					M	S/P	<b>19-452.035</b>	<b>19-432.035</b>	2	1	2	4	0.002
				1 NO	MA	S/P	<b>19-481.035</b>	<b>19-471.035</b>	2	1	2	3	0.002
					M	S/P	<b>19-451.035</b>	<b>19-431.035</b>	2	1	2	5	0.002
		SA	Au	1 NC	MA	S/P	<b>19-289.035</b>	<b>19-279.035</b>	2	1	2	3	0.002
					M	S/P	<b>19-159.035</b>	<b>19-139.035</b>	2	1	2	5	0.002
			Ag	1 NO	MA	S/P	<b>19-289.015</b>	<b>19-279.015</b>	2	1	2	3	0.002
					M	S/P	<b>19-159.015</b>	<b>19-139.015</b>	2	1	2	5	0.002

Switching system: LL = Low level switching element, SA = Snap-action switching element

Contact material: Au = Gold, Ag = Silver

Contacts: NC = Normally closed, NO = Normally open


Switching action: MA = Maintained action, M = Momentary action

Terminals: S/P = Soldering-/plug-in terminal

Component layout from page 14, Mounting dimensions from page 14, Technical drawing from page 14, Circuit drawing from page 15


## Front

### Lens

	Lens	□ 9 x 9 mm Typ-Nr.	∅ 9 mm Typ-Nr.	
illuminative	Plastic flush transparent blue	<b>19-951.6</b>	<b>19-931.6</b>	0.001
	Plastic flush transparent green	<b>19-951.5</b>	<b>19-931.5</b>	0.001
	Plastic flush transparent red	<b>19-951.2</b>	<b>19-931.2</b>	0.001
	Plastic flush transparent white	<b>19-951.9</b>	<b>19-931.9</b>	0.001
	Plastic flush transparent yellow	<b>19-951.4</b>	<b>19-931.4</b>	0.001
illuminative (not recommended for film insert)	Plastic flush transparent blue	<b>19-952.6</b>	<b>19-932.6</b>	0.001
	Plastic flush transparent colourless	<b>19-952.7</b>	<b>19-932.7</b>	0.001
	Plastic flush transparent green	<b>19-952.5</b>	<b>19-932.5</b>	0.001
	Plastic flush transparent red	<b>19-952.2</b>	<b>19-932.2</b>	0.001
non-illuminative	Plastic flush opaque black	<b>19-951.0</b>	<b>19-931.0</b>	0.001
	Plastic flush opaque grey	<b>19-951.8</b>	<b>19-931.8</b>	0.001



### Blind plug


	Blind plug	□ 9 x 9 mm Typ-Nr.	∅ 9 mm Typ-Nr.	Mounting dimensions	
<b>Blind plug</b>	Plastic black	<b>19-948.0</b>	<b>19-949.0</b>	1	0.001




Mounting dimensions from page 14

## Backside


### PCB plug-in base

	Terminals	Typ-Nr.	Component layout		Technical drawing	
<b>PCB plug-in base</b> Pins axial	P	<b>19-940</b>	4	4	0.001	
Pins bent at right-angles	P	<b>19-941</b>	3	5	0.001	




Terminals: P = PCB terminal  
Component layout from page 14, Technical drawing from page 14

### Flat receptacle

	Typ-Nr.	
<b>Flat receptacle</b> 2.0 x 0.5 mm for Universal terminal	<b>31-945</b>	0.001



### Insulation sleeve


	Typ-Nr.	
<b>Insulation sleeve</b> for Flat receptacle 31-945	<b>31-928</b>	0.001






## Illumination

## Filament lamp

	Socket	Operating voltage/-current	Typ-Nr.	
<b>Filament lamp</b> max. PIN length 5 mm	T1 Bi-Pin	12 VAC/DC, 25 mA	<b>10-1609.1199</b>	0.001
		24 VAC/DC, 20 mA	<b>10-1612.1179</b>	0.001
		6 VAC/DC, 70 mA	<b>10-1606.1309</b>	0.001




## Single-LED

	Socket	Light colour	Operating voltage/-current	Typ-Nr.	
<b>Single-LED</b> max. PIN length 8 mm	T1 Bi-Pin	green	2.2 VDC, 20 mA	<b>10-2602.3175C</b>	0.001
		red	2.2 VDC, 20 mA	<b>10-2602.3172C</b>	0.001
		white	3.6 VDC, 20 mA	<b>10-2603.3179C</b>	0.001
		yellow	2.2 VDC, 20 mA	<b>10-2602.3174C</b>	0.001




## Multi-LED

	Socket	Light colour	Operating voltage/-current	Typ-Nr.	
<b>Multi-LED</b> max. PIN length 5 mm	T1 Bi-Pin	green	28 VDC, 12 mA	<b>10-4613.3105B</b>	0.001
		orange	28 VDC, 12 mA	<b>10-4613.3103B</b>	0.001
		red	28 VDC, 12 mA	<b>10-4613.3102B</b>	0.001
		yellow	28 VDC, 12 mA	<b>10-4613.3104B</b>	0.001




## Assembling

### Fixing nut

	Typ-Nr.	
<b>Fixing nut</b> 9 x 13 mm dia., only for sheet <3 mm panel thickness	<b>19-991</b>	0.001




### Dressing tool

	Typ-Nr.	
<b>Dressing tool</b> for aligning buttons	<b>19-906</b>	0.011




### Lens remover

	Typ-Nr.	
<b>Lens remover</b>	<b>19-910</b>	0.002



### Lamp remover


	Typ-Nr.	
<b>Lamp remover</b>	<b>11-906</b>	0.003



#### CAUTION

A switching process might be released when replacing the Lamp/LED !

### Mounting tool

	Typ-Nr.	
<b>Mounting tool</b> for tightening or loosening of the Fixing nut	<b>19-905</b>	0.011



## Actuator with snap-action switching element

### Switching system

Single-break, snap-action switching system.  
1 normally open contact

### Material

#### Material of contact

Gold plated Silver, Silver plated

#### Switch housing

Polyetherimide (PEI), self-extinguishing

#### Actuator housing

Polyphenyleneoxide (PPO), self-extinguishing, colour black

### Mechanical characteristics

#### Terminals

Universal terminal:  
Max. wire diameter 2 x 0.8 mm  
Max. wire cross-section of stranded cable 1 x 0.75 mm<sup>2</sup>

Plug-in terminal: 2.0 x 0.5 mm  
For these terminals we can also supply a plug-in base which, when soldered on to the board, enables the switch to be plugged in.

#### Tightening torque

for fixing nut max. 20 Ncm

#### Actuating force

1.6 N

#### Actuating travel

2.8 mm ±0.2 mm

#### Mechanical lifetime

2 million operations

### Electrical characteristics

#### Switch rating

Silver plated:  
Max. 50 VAC / 72 VDC, 0.8 A or 50 W  
Min. 20 V, 10 mA  
Gold plated:  
Max. 50 VAC / 72 VDC, 100 mA or 5 W  
Min. 100 µV, 50 µA

#### Electric strength

2500 VAC, 50 Hz, 1 min. between all terminals and earth, as per IEC 60512-2-11

### Environmental conditions

#### Storage temperature

-40 °C ... +85 °C

#### Service temperature

without illumination -25 °C ... +65 °C  
with incandescent lamp -25 °C ... +45 °C  
with LED -25 °C ... +65 °C  
for indicators and illuminated pushbuttons mounted as a block, make sure the heat can escape freely

#### Protection degree

IP 40 front side, as per IEC 60529

### Approvals

RoHS compliant

## Actuator with low level switching element

### Switching system

This low-level switching system was designed for switching low powers in electronic circuits. The switching system assures reliable switching of loads.  
Single-break momentary contact, as normally open or normally closed with 4 independent points of contact.  
Special features are the long life, extremely short rebound time and stable contact resistance.  
1 normally open or 1 normally closed contact.

### Material

#### Material of contact

Gold plated

#### Actuator housing

Polyphenyleneoxide (PPO), self-extinguishing, colour black

### Mechanical characteristics

#### Terminals

Universal terminal:  
Max. wire diameter 2 x 0.8 mm  
Max. wire cross-section of stranded cable 1 x 0.75 mm<sup>2</sup>

Plug-in terminal: 2.0 x 0.5 mm

For these terminals we can also supply a plug-in base which, when soldered on to the board, enables the switch to be plugged in.

#### Tightening torque

for fixing nut max. 20 Ncm

#### Actuating force

1.8 N ±0.3 N

#### Actuating travel

2.8 mm ±0.2 mm

#### Rebound time

Typ. <100 µs

#### Mechanical lifetime

5 million operations

### Electrical characteristics

#### Contact resistance

≤50 mΩ starting value (initial) as per IEC 60512-2-2b

#### Switch rating

10 µA, 100 µV to 100 mA at 42 VAC/VDC

#### Electric strength

2500 VAC, 50 Hz, 1 min. between all terminals and earth, as per IEC 60512-2-11

### Environmental conditions

#### Storage temperature

-40 °C ... +85 °C

**Service temperature**

without illumination -25 °C ... +65 °C

with incandescent lamp -25 °C ... +45 °C

with LED -25 °C ... +65 °C

for indicators and illuminated pushbuttons mounted as a block,  
make sure the heat can escape freely

**Protection degree**

IP 40 front side, as per IEC 60529

**Shock resistance**

(Single impacts, semi-sinusoidal)


15 g for 11 ms, as per IEC 60512-4-3, IEC 60068-2-27

**Approvals**


RoHS compliant

## Component layout


### 1 Indicator actuator page 7




### 2 Illuminated pushbutton actuator page 7



### 3 PCB plug-in base page 9




### 4 PCB plug-in base page 9




## Mounting dimensions

### 1 Indicator actuator page 7 | Illuminated pushbutton actuator page 7 | Blind plug page 8

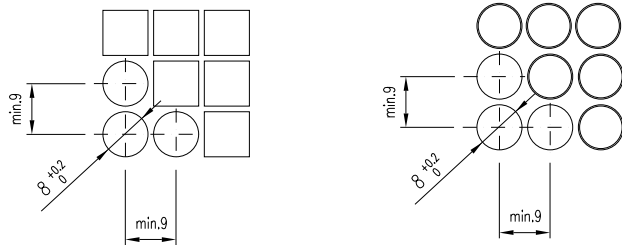


## Technical drawing


### 1 Indicator actuator page 7

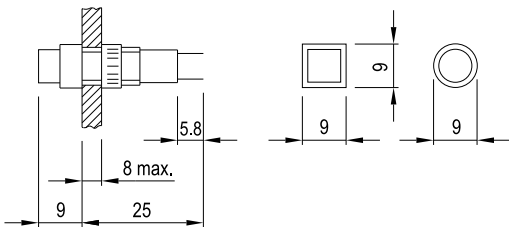


## 2 Illuminated pushbutton actuator page 7

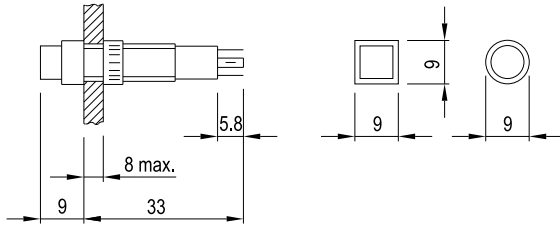


## 3 Indicator actuator page 7

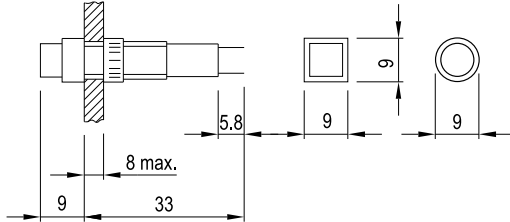

## 4 PCB plug-in base page 9



## 5 PCB plug-in base page 9




## Circuit drawing


### 1 Indicator actuator page 7




### 2 Illuminated pushbutton actuator page 7




### 3 Illuminated pushbutton actuator page 7



## 4 Illuminated pushbutton actuator page 7



## 5 Illuminated pushbutton actuator page 7



# Index from Typ-Nr.

Typ-Nr.	Page	Typ-Nr.	Page	Typ-Nr.	Page
10-1606.1309	10	19-991	11		
10-1609.1199	10	31-928	9		
10-1612.1179	10	31-945	9		
10-2602.3172C	10				
10-2602.3174C	10				
10-2602.3175C	10				
10-2603.3179C	10				
10-4613.3102B	10				
10-4613.3103B	10				
10-4613.3104B	10				
10-4613.3105B	10				
11-906	11				
19-030.005	7				
19-031.005	7				
19-050.005	7				
19-051.005	7				
19-139.015	7				
19-139.035	7				
19-159.015	7				
19-159.035	7				
19-279.015	7				
19-279.035	7				
19-289.015	7				
19-289.035	7				
19-431.035	7				
19-432.035	7				
19-451.035	7				
19-452.035	7				
19-471.035	7				
19-472.035	7				
19-481.035	7				
19-482.035	7				
19-905	11				
19-906	11				
19-910	11				
19-931.0	8				
19-931.2	8				
19-931.4	8				
19-931.5	8				
19-931.6	8				
19-931.8	8				
19-931.9	8				
19-932.2	8				
19-932.4	8				
19-932.5	8				
19-932.6	8				
19-932.7	8				
19-940	9				
19-941	9				
19-948.0	8				
19-949.0	8				
19-951.0	8				
19-951.2	8				
19-951.4	8				
19-951.5	8				
19-951.6	8				
19-951.8	8				
19-951.9	8				
19-952.2	8				
19-952.4	8				
19-952.5	8				
19-952.6	8				
19-952.7	8				



	<b>EAO AG</b> Tannwaldstrasse 88 4601 Olten, Switzerland
<b>E-mail</b>	info@eao.com
<b>Website</b>	www.eao.com
	<b>Austria</b>
Phone	+49/201 85 87 0
E-mail	sales.ede@eao.com
	<b>Belgium</b>
Phone	+32/2 456 00 10
E-mail	sales.ebl@eao.com
	<b>China</b>
Phone	+852/27 86 91 41
E-mail	sales.ehk@eao.com
	<b>France</b>
Phone	+33/1 64 43 37 37
E-mail	sales.esa@eao.com
	<b>Germany</b>
Phone	+49/201 85 87 0
E-mail	sales.ede@eao.com
	<b>Italy</b>
Phone	+39/035 481 0189
E-mail	sales.eit@eao.com
	<b>Japan</b>
Phone	+81/3 5401 0953
E-mail	sales.esj@eao.com
	<b>Netherlands</b>
Phone	+31/78 653 17 00
E-mail	sales.enl@eao.com
	<b>Sweden</b>
Phone	+46/8 683 86 60
E-mail	sales.esw@eao.com
	<b>Switzerland</b>
Phone	+41/62 388 95 00
E-mail	sales.ech@eao.com
	<b>United Kingdom</b>
Phone	+44/1444 236000
E-mail	sales.euk@eao.com
	<b>USA</b>
Phone	+1/203 877 4577
E-mail	sales.eus@eao.com
	<b>Other Countries</b>
Fax	+41/62 296 21 62
E-mail	info@eao.com
Website	www.eao.com

