


FO-55111-A

4



3


2

1


HONEYWELL PART NUMBER
8AS193
FAA-PMA 

REV	DOCUMENT	CHANGED BY	CHECK
12	0054409	SJK 10JUL09	CMH

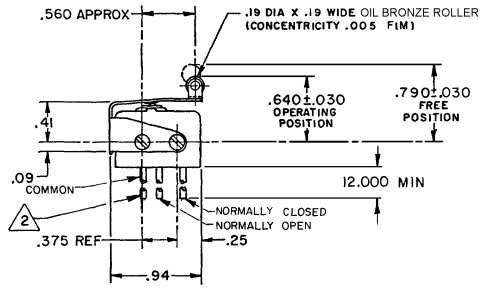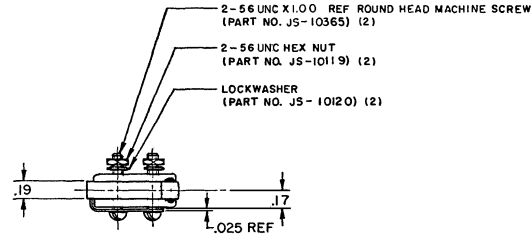

- NOTES
- 1 - UNIT INCLUDES CATALOG LISTING 1SE201 BASIC SWITCH AND JE-13 TYPE ACTUATOR
 -  (3) NO. 20 WIRE LEAD PER MIL-W-22759/7
 -  FOR MANUFACTURING DETAIL SEE ASSEMBLY DRAWING 8AS193 FOR FAA-PMA

REPLACES : X71296-8AS

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: INCH TOLERANCES UNLESS NOTED:		DRAWN TSM 25AUG80 CHECK DJW 28AUG80		Honeywell	
CONTACT ARRANGEMENT S P D T		INDUCTIVE SEA LEVEL ----- 3 AMP 50,000 FT ----- 2.5 AMP		NO PLACE X ± 0.040 ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± 0.0005 ANGLES ± 2°		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			
OPERATING FORCE ----- 12 OZ MAX RELEASE FORCE ----- 2 OZ MIN		250VAC ----- 5 AMP 30 VOLTS DC RATING		THIRD ANGLE PROJECTION 		INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		SIZE TYPE DRAWING NAME B I 8AS193	
DIFFERENTIAL TRAVEL ----- .025 MAX OVERTRAVEL ----- .015 MIN		RESISTIVE SEA LEVEL ----- 5 AMP 50,000 FT ----- 5 AMP MAXIMUM INRUSH ----- 24 AMP				RASTER		SCALE FULL SHEET 1 OF 1	

4

3

2

1