

# Control and signalling units Ø 16

---

Harmony® style 6

Pushbuttons, switches and pilot lights, with double insulated bezel

## Contents

---

|                             |                 |
|-----------------------------|-----------------|
| General                     | Pages 2 to 5    |
| Characteristics             | Pages 6 and 7   |
| References                  |                 |
| Sub-assemblies : bodies     | Pages 8 and 9   |
| Sub-assemblies : heads      | Pages 10 to 15  |
| Pushbutton and lens caps    | Pages 16 to 19  |
| Accessories and spare parts | Pages 20 and 21 |
| Dimensions                  | Pages 22 to 25  |

---

# Control and signalling units Ø 16

Harmony® style 6

Pushbuttons, switches and pilot lights, with double insulated bezel


General

Characteristics :  
pages 6 and 7  
References :  
pages 8 to 21  
Dimensions :  
pages 22 to 25


## Description

The Ø 16, style 6 range of control and signalling units comprises :


### Complete units



### Sub-assemblies for user assembly



### Component parts and accessories

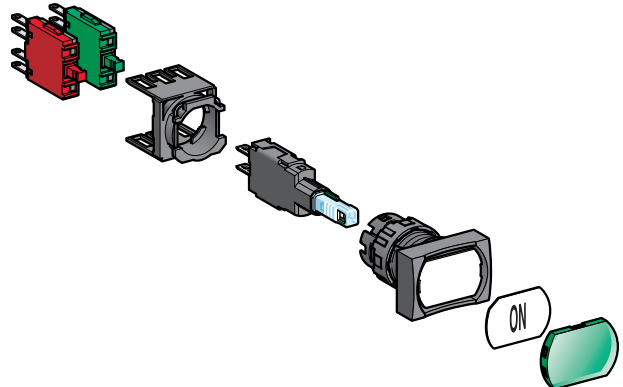

These control and signalling units are ideally suited to the dialogue sector, which is dedicated to the manual and prompt action from control panels. This could entail : adjustment, parametering or the feedback of information.

### Luminosity

LEDs, providing high performance.  
Brilliant colours (white, blue, etc.)  
Service life : 100,000 hours

### Safety

Slow break contacts.  
N/C contacts with positive opening operation.  
Tactile and audible feedback contacts.  
Maintenance free LEDs, protected against electromagnet interference conforming to the standard IEC 1000-4.

### Modularity and customising

The Ø 16 range of pushbuttons and selector switches includes sub-assemblies for variable composition of the units by the user, thus providing complete adaptability.  
For signalling functions :  
- choice of light source (LED, incandescent bulb or neon bulb),  
- software for legend marking.

# Control and signalling units Ø 16

Harmony® style 6

Pushbuttons, switches and pilot lights, with double insulated bezel

Characteristics :  
pages 6 and 7  
References :  
pages 8 to 21  
Dimensions :  
pages 22 to 25

General


Complete units

Supplied as standard kits (head + body), ready for mounting



Pushbuttons, switches and pilot lights  
with rectangular, square or circular head

Colour of head


Illuminated pushbuttons  
with flush push

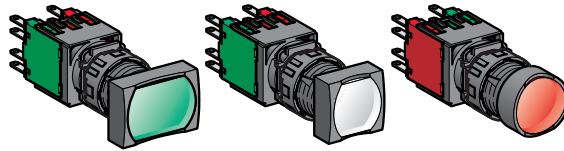



Illuminated pushbuttons  
with projecting push

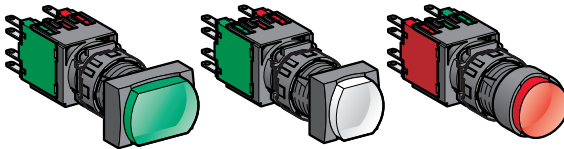


LED pilot lights



Pushbuttons  
with flush push

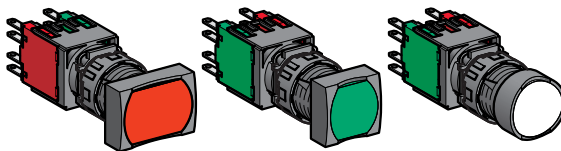

Ø 30 trigger action  
mushroom head  
pushbuttons

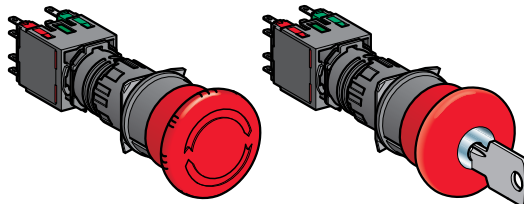

Selector switches



Key switches



# Control and signalling units Ø 16

Harmony® style 6









































































Pushbuttons, switches and pilot lights, with double insulated bezel

General

Characteristics :  
pages 6 and 7  
References :  
pages 8 to 21  
Dimensions :  
pages 22 to 25

Illuminated units  
for user assembly

Supplied as individual sub-assemblies (heads, bodies) and the component parts, allowing variable composition of the units

|   | Body sub-assemblies | Head sub-assemblies<br>Rectangular, square and circular | Colour of head   |  |  |
|---|---------------------|---|--|--|--|
| Illuminated pushbuttons with flush push                                       |                     |   | <br><br><br><br><br>             | <br><br><br><br><br>             | <br><br><br><br><br>             |
| Illuminated pushbuttons with projecting push                                  |                     |   | <br><br><br><br><br>        | <br><br><br><br><br>        | <br><br><br><br><br>        |
| Illuminated selector switches (handle not included, to be ordered separately) |                     |   | <br><br><br><br><br> | <br><br><br><br><br> | <br><br><br><br><br> |
| Pilot lights (LED, incandescent and neon)                                     |                     |   | <br><br><br><br><br> | <br><br><br><br><br> | <br><br><br><br><br> |

# Control and signalling units Ø 16

Harmony® style 6

Pushbuttons, switches and pilot lights, with double insulated bezel

Characteristics :  
pages 6 and 7  
References :  
pages 8 to 21  
Dimensions :  
pages 22 to 25

General

Non illuminated units  
for user assembly


Supplied as individual sub-assemblies (heads, bodies) and the component parts, allowing variable composition of the units

Pushbuttons  
with flush push

Body  
sub-assemblies

Head sub-assemblies  
Rectangular, square and circular

Colour  
of head



Ø 24 mushroom head  
spring return pushbuttons  
and  
Ø 30 Emergency stop trigger  
action mushroom head  
pushbuttons



Selector switches



Key switches




Component parts  
and accessories for  
variable composition

It is possible to customise both control and signalling units of the range by replacing various component parts, for example :

For operating head

- Pushbutton caps and lenses.
- Legends
  - Pre-printed legends.
  - Specific legends from the software library (SIS labelling software).
- Link for operation of 3rd contact (not available on illuminated pushbuttons).



For body

- Light sources (LED, incandescent or neon).
- Contact blocks (N/C or N/O), up to 3 contacts per body, with Faston connectors or pins for printed circuits.
- Gold or silver plated contact blocks (N/O or N/C).

