


1. MATERIAL: ALNICO 5, CAST, PHYSICAL SPECIFICATION PER MMPA STANDARDS NO. 0100-90 (SEE GAUSS SPECIFICATION)
2. MAGNETIZATION LEVEL: SEE BELOW
3. MAGNETIZATION DIRECTION: PARALLEL TO LENGTH
4. DIMENSIONS: AS SHOWN
5. SQUARENESS: 1°
6. PACKING: 250-70-530-01 TO BE SHRINK WRAPPED ON CARDBOARD SLATS. 100 PIECES PER SLAT, POLES ATTRACTING. OTHER METHODS ACCEPTABLE WITH SIGNED ENGINEERING APPROVAL

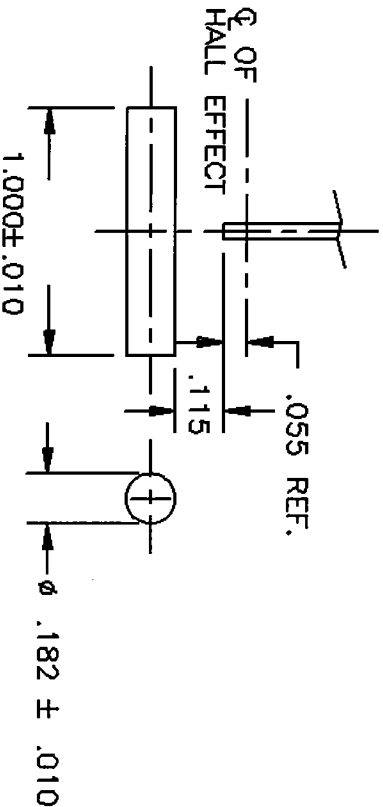

PROPRIETARY NOTE

THIS DRAWING AND ALL INFORMATION THEREON IS THE PROPERTY OF BREED TECHNOLOGIES, INC. AND IS CONFIDENTIAL AND PROPRIETARY AND MUST NOT BE MADE PUBLIC OR CONT'D UNLESS EXPRESSLY AUTHORIZED IN WRITING BY BREED TECHNOLOGIES, INC. AND IS SUBJECT TO RETURN UPON DEMAND.

THIS NOTE APPLIES TO 250-70-530-01. THE 250-70-530-00 IS SUPPLIED UNMAGNETIZED. MAGNETIZATION LEVEL- USING F.W. BELL METER 4048, TRANSVERSE PROBE #1706 (REF), AND TN 3930-C 120 GAUSS MINIMUM MEASURED AT THE MAGNETS CENTER AT AN AIR GAP OF .115" PER ABOVE DRAWING.

H-36 MAGNET (MAGNETIZED)

REV.	DESCRIPTION OF REVISION	DCR No.	BY	DATE	APP.	DATE	H A M L I N, Inc.		DCR No. 2431	
AJ	ADD SPECIFICATIONS STANDARDS	A7823	CRR	2/23/99	CRR	2/24/99	Dwnr.	BB	DATE 5/18/73	250-70-530-01
							App'd	MM	DATE 5/28/73	Page 1 of 1