

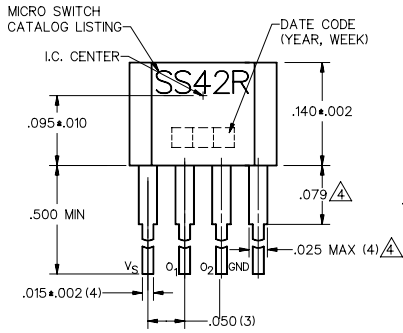


**M** SS42R


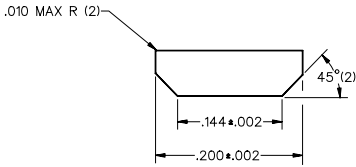


MAGNETIC CHARACTERISTICS (GAUSS) <sup>△</sup>			
	24±2°C V <sub>S</sub> = 12±0.5V VDC	0°C TO 75°C V <sub>S</sub> = 4.5 TO 28 VDC	0°C TO 100°C V <sub>S</sub> = 4.5 TO 16 VDC
OPERATE POINT	55 MIN: 185 MAX	40 MIN: 250 MAX	40 MIN: 350 MAX
RELEASE POINT	-185 MIN: -55 MAX	-250 MIN: -40 MAX	-350 MIN: -40 MAX
DIFFERENTIAL	200 MIN: 300 MAX	150 MIN: 420 MAX	150 MIN: 600 MAX

ABSOLUTE MAXIMUM RATINGS <sup>△</sup>	
TEMPERATURE	-40°C MIN: 125°C MAX. STORAGE, NO POWER SUPPLIED
SUPPLY VOLTAGE (V <sub>S</sub> )	-28V MIN: 28V MAX, 0 TO 100°C
VOLTAGE EXTERNALLY APPLIED TO OUTPUT	-1.2V MIN: 5V MAX, 0 TO 100°C
OUTPUT CURRENT	-10mA MIN: 10mA MAX
MAGNETIC FLUX	NO LIMIT THE CIRCUIT CANNOT BE DAMAGED BY MAGNETIC OVERDRIVE

ELECTRICAL CHARACTERISTICS				
	24±2°C		0°C TO 75°C	REMARKS
	MIN	MAX	MIN	
SUPPLY CURRENT	11.0mA		12.0mA	NO LOAD <sup>△</sup>
OUTPUT VOLTAGE:				
#1 SOURCING	5.0	6.0		SWITCH MAGNETICALLY OPERATED: NO LOAD <sup>△</sup>
#2 SINKING	0	.2		SWITCH MAGNETICALLY RELEASED: NO LOAD <sup>△</sup>
#1 SOURCING	5.0	6.0		NO LOAD <sup>△</sup>
#2 SINKING	1.0 μA			APPLY VOLTAGE 0.2V GREATER THAN MEASURED OUTPUT SOURCE VOLTAGE MEASURE CURRENT, NO LOAD <sup>△</sup>
OUTPUT CURRENT:				APPLY 2 VOLTS TO OUTPUT AND MEASURE CURRENT. SWITCH MAGNETICALLY OPERATED, NO LOAD <sup>△</sup>
#1 SOURCING	4.0mA	6.5mA	3.75	4.4
#2 SINKING	2.8mA	4.7mA	2.4	4.4
#1 SINKING	2.8mA	4.7mA	2.2	4.4
#2 SOURCING	4.0mA	6.5mA	3.75	6.4
OUTPUT SWITCHING TIME:				
FALL TIME:	1.0 μS			90% TO 10% NO LOAD <sup>△</sup>
RISE TIME:	1.0 μS			10% TO 90% NO LOAD <sup>△</sup>

DRAWING NUMBER: SS42R  
 PAGE 1 OF 1  
 RELEASE NO. DR-3124  
 DATE: 16 JAN 85  
 DRAWN BY: MAM/3  
 CHECKED BY: MAM/3  
 DATE: 18 DEC 87  
 DDM/CAD  
 KAG/18

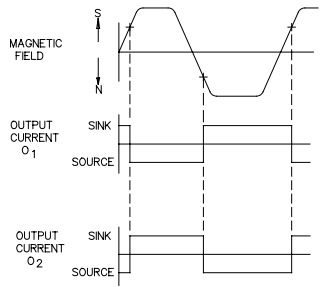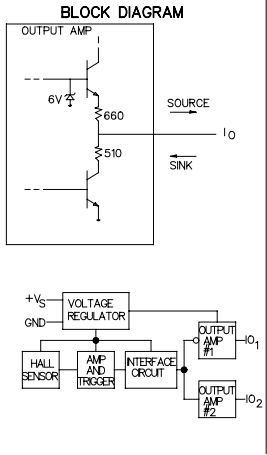

**NOTES**  
<sup>△</sup> THE MAGNETIC FLUX USED TO OPERATE THE SWITCH MUST BE IN THE DIRECTION AND LOCATION SHOWN (THIS ASSUMES THE CONVENTION THAT THE DIRECTION OF THE EXTERNAL FLUX OF A MAGNET IS FROM THE NORTH TO THE SOUTH POLE OF THE MAGNET)  
<sup>△</sup> THE MAGNETIC FIELD STRENGTH (GAUSS) REQUIRED TO CAUSE THE SWITCH TO CHANGE STATE (OPERATE AND RELEASE) WILL BE AS SPECIFIED IN THE MAGNETIC CHARACTERISTICS. TO TEST THE SWITCH AGAINST THE SPECIFIED MAGNETIC CHARACTERISTICS THE SWITCH MUST BE PLACED IN A UNIFORM MAGNETIC FIELD  
<sup>△</sup> ABSOLUTE MAXIMUM RATINGS ARE THE EXTREME LIMITS THAT THE DEVICE WILL WITHSTAND WITHOUT DAMAGE TO THE DEVICE. HOWEVER, THE ELECTRICAL AND MAGNETIC CHARACTERISTICS ARE NOT GUARANTEED AS THE MAXIMUM LIMITS (ABOVE RECOMMENDED OPERATING CONDITIONS) ARE APPROACHED NOR WILL THE DEVICE NECESSARILY OPERATE AT ABSOLUTE MAXIMUM RATING  
<sup>△</sup> DIMENSIONS NOTED ARE DUE TO TIE BAR REMOVAL AND ARE VALID ONLY IN .079 DIMENSION.  
<sup>△</sup> BURRS EXTEND BACK FROM FRONT SURFACE ONLY  
<sup>△</sup> 28±0.5% VOLTS SUPPLY

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

<b>MICRO SWITCH</b> a Honeywell Division FED. REG. CODE 91929	SOLID STATE SWITCH	CATALOG LISTING SS42R
	THIRD ANGLE PROJECTION SCALE 10 : 1 DO NOT SCALE PRINT <b>UNLESS OTHERWISE SPECIFIED TOLERANCES ARE</b> ONE PLACE (L0) ±.030 TWO PLACES (L00) ±.015 THREE PLACES (L000) ±.005 ANGLES ± 2° WEIGHT	

MASTER REDUCED  
 ANSI Y14.5M-1982 APPLIES