

Installation Instructions for the 2SS52M Series Magneto-resistive Position Sensors

ISSUE 1
PK 80077

WARNING

PERSONAL INJURY

- DO NOT USE these products as safety or emergency stop devices, or in any other application where failure of the product could result in personal injury.


Failure to comply with these instructions could result in death or serious injury.

OPERATING MODE

2SS52M Series are operated by magnetic fields (North or South) **parallel** to the sensor package.

NOTICE

Due to the inherently high sensitivity of the 2SS52M, stray magnetic fields parallel to the IC may affect operation.

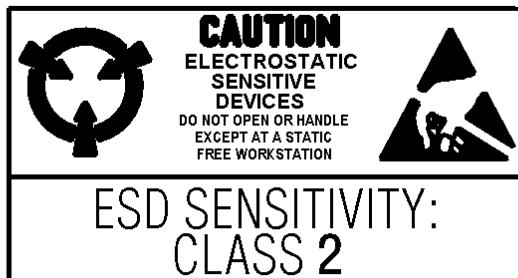

SOLDERING/ASSEMBLY

Leads **must** be adequately supported during any forming/shearing operation to ensure that the leads are not stressed inside the plastic case. Recommended PC board wave soldering temperature is 250 to 260°C (482 to 500°F) for 3 seconds maximum.

ABSOLUTE MAXIMUM RATINGS*

Supply voltage	3.8 to +30 VDC
Voltage externally applied to output	+24 VDC max. (OFF cond. only) -0.5 VDC min. (OFF or ON cond.)
Output ON current	20 mA max.
Temperature	-40 to +150°C (-40 to +302°F)
Magnetic flux	No limit. Circuit cannot be damaged by magnetic overdrive.

* Absolute maximum ratings are the extreme limits that the device will withstand without damage to the device. However, the electrical and mechanical characteristics are not guaranteed as the maximum limits (above recommended operating conditions) are approached, nor will the device necessarily operate at absolute maximum ratings.


ELECTRICAL SPECIFICATIONS over 3.8 to 30 VDC and -40 to +150°C unless otherwise noted

	Typ.	Max.	Remarks
Supply Current (without load) at 25°C, with 16V supply	6 mA	11 mA 10 mA	Max. operated Max. released
Output Voltage (operated)	0.25 V	0.40 V	Sinking 20 mA max.
Output Leakage Current (released)		10 µA	Leakage into sensor output
Output Switching Time	Rise 0.2 µs Fall 0.1 µs	1.5 µs 1.5 µs	10 to 90%, 1600 Ω, 20 pF load 90 to 10%, 1600 Ω, 20 pF load



MAGNETIC CHARACTERISTICS over 3.8 to 30 VDC Supply Voltage

Temperature Range	Max. Operate	Min. Release	Max. Differential
-25 to +85°C (-13 to +185°F)	25 gauss	5 gauss	7 gauss
-40 to +150°C (-40 to +302°F)	25 gauss	4 gauss	8 gauss

MOUNTING DIMENSIONS (for reference only)

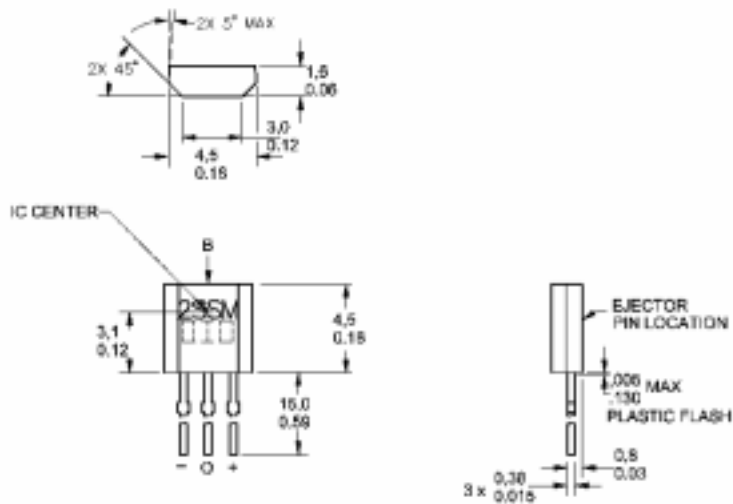


2SS52M-S Dimensions (Surface Mount)







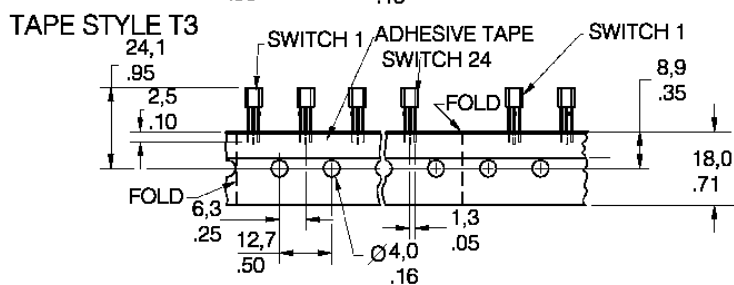
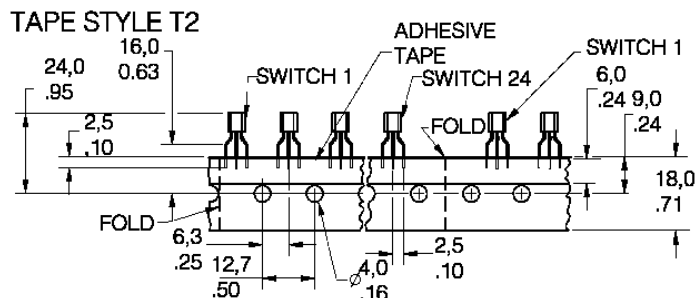


Tape styles T2 and T3 are available in ammo style package.

BLOCK DIAGRAM CURRENT SINKING OUTPUT (NPN)

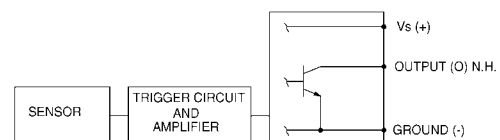

INTERFACE DIAGRAMS NPN (CURRENT SINKING) OUTPUT

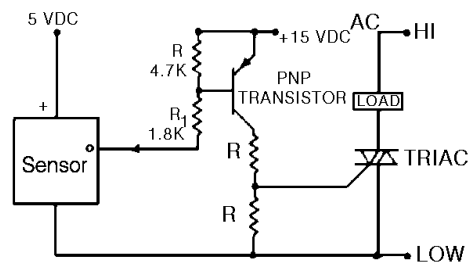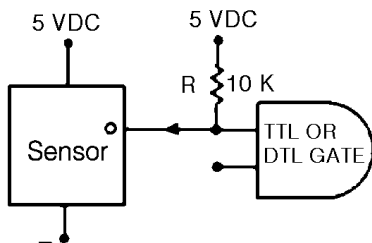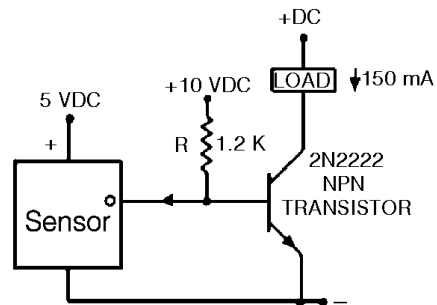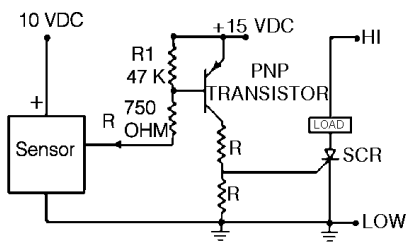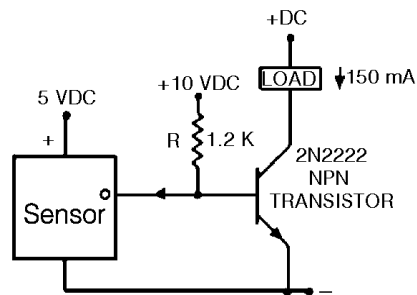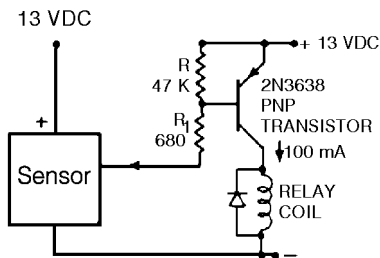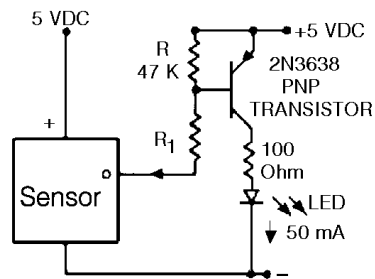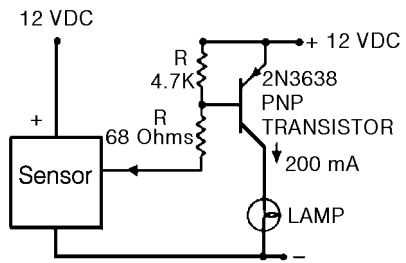

WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Contact your local sales office for warranty information. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace without charge those items it finds defective. The foregoing is Buyer's sole remedy and is **in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose.**

For application assistance, current specifications, pricing or name of the nearest Authorized Distributor, contact a nearby sales office. Or call:

1-800-537-6945 USA

1-800-737-3360 Canada

1-815-235-6847 International

FAX

1-815-235-6545 USA

INTERNET

<http://www.honeywell.com/sensing/>

info@micro.honeywell.com

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

While we provide application assistance, personally and through our literature, it is up to the customer to determine the suitability of the product in the application.

Honeywell

Honeywell Inc.
11 West Spring Street
Freeport, Illinois 61032



Printed with Soy Ink
on 50% Recycled Paper

PK 80077-1-EN IL50 GLO 698 Printed in USA