



NOTES
 1 - THE + MAGNETIC FLUX IS IN THIS DIRECTION (THIS ASSUMES THE CONVENTION THAT THE DIRECTION OF THE EXTERNAL FLUX OF A MAGNET IS FROM THE NORTH TO THE SOUTH POLE OF THE MAGNET)
 2 - AT 25°C AND 2,200 OHM LOAD
 3 - ABSOLUTE MAXIMUM RATINGS ARE THE EXTREME LIMITS THAT THE DEVICE WILL WITHSTAND WITHOUT DAMAGE TO THE DEVICE. HOWEVER, THE ELECTRICAL AND MAGNETIC CHARACTERISTICS ARE NOT GUARANTEED AS THE MAXIMUM LIMITS (ABOVE RECOMMENDED OPERATING CONDITIONS) ARE APPROACHED NOR WILL THE DEVICE NECESSARILY OPERATE AT ABSOLUTE MAXIMUM RATING
 4 - REFERENCE CURVES

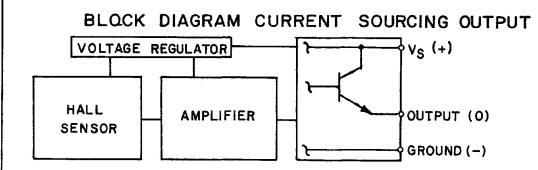

PARAMETER	PERFORMANCE @ 12 VDC	
	TYPICAL	MAX TOLERANCE
SPAN (-400 TO +400 GAUSS)	6.00 VDC	
NULL (OFFSET AT 0 GAUSS)	6 VDC	±0.6 VDC
SENSITIVITY (MV/GAUSS) (V_0 @ 340G - V_0 @ -340G) / 680	9.9	±1.3
LINEARITY % OF SPAN		±1.5%
TEMPERATURE ERROR NULL % OF SPAN -40°C TO 150°C -25°C TO 85°C 0°C TO 50°C		±5% ±3% ±2%
GAIN -40°C TO 0°C 0°C TO 150°C	-0.034%/°C -0.077%/°C	

ELECTRICAL CHARACTERISTICS			
	25°C	-40°C TO +150°C	REMARKS
SUPPLY CURRENT (MAX)	16mA	19mA	EXCLUDING LOAD CURRENT 8 TO 16VDC SUPPLY VOLTAGE

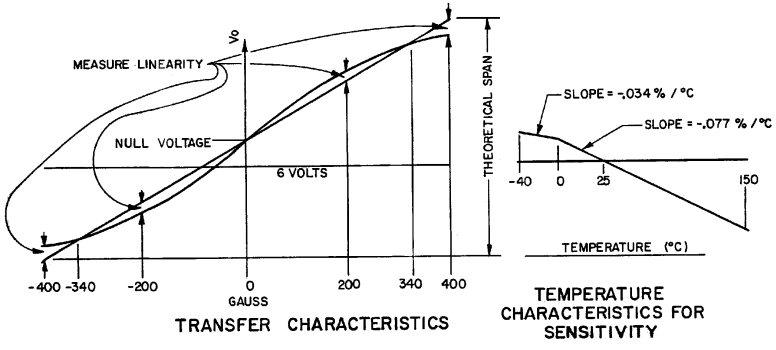

ABSOLUTE MAXIMUM RATING	
SUPPLY VOLTAGE	-0.5 TO +16.0 VDC
OUTPUT CURRENT	10 mA MAX
STORAGE TEMPERATURE	-40°C TO 150°C
MAGNETIC FLUX	NO LIMIT, THE CIRCUIT CANNOT BE DAMAGED BY MAGNETIC OVERDRIVE

THIRD ANGLE PROJECTION
SCALE NONE
DO NOT SCALE PRINT
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
ONE PLACE (.0) ±.030
TWO PLACES (.00) ±.015
THREE PLACES (.000) ±.005
ANGLES ±
WEIGHT



THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH. CATALOG LISTING: SOLID STATE LINEAR OUTPUT HALL EFFECT TRANSDUCER

MICRO SWITCH
 a Honeywell Division

91SS16-3

MASTER REDUCED

REV. 476 008 9/820

91SS16-3

PAGE 1 OF 1

M

4

0099600

J J A F 27AUG99

ANSI Y14.5M-1982 APPLIES