



NTC THERMISTORS: TYPE NC08


SMD CHIP THERMISTOR 0805 SIZE

DESCRIPTION:


0805 size surface mount ceramic chip thermistor

FEATURES:

- Cost effective thermistor for automatic placement
- Standard resistance tolerances down to $\pm 3\%$
- High sensitivity to changes in temperature
- Suitable for temperature measurement, control and compensation
- Suitable for epoxy termination.
- Wide operating temperature range: -50°C to 125°C
- Rugged construction
- Available in other material systems
- Palladium Silver terminations
- Other termination systems available
- Available pocket taped to EIA RS-481

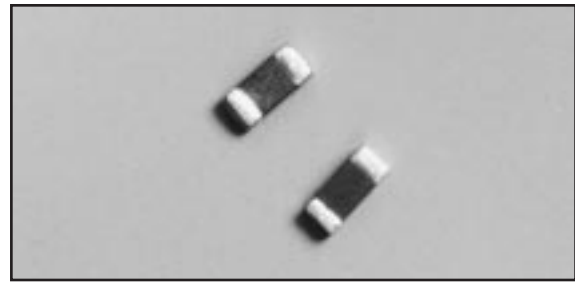

DIMENSIONS:

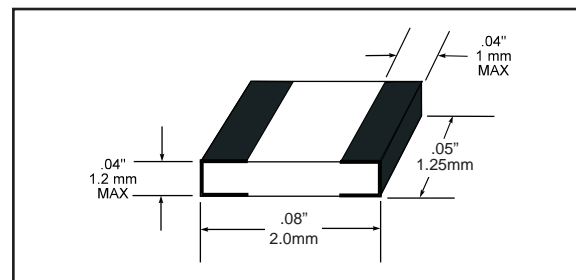

TYPE NUMBER	R@25C (Ohms)	MATERIAL SYSTEM	tc (%/C)	Beta (25/85)
NC0805KA502KB	5K	D8.5	-4.23	3770K
NC0805KH103KB	10K	C9.7	-4.61	4040K
NC0805KB223KB	22K	D9.5	-4.43	3970K
NC0805KB303KB	30K	D9.5	-4.43	3970K
NC0805KC503KB	50K	D9.7A	-4.39	3970K
NC0805KD104KB	100K	D10.3	-4.49	4070K
NC0805KE154KB	150K	D12.2	-4.78	4350K
NC0805KE204KB	200K	D12.2	-4.78	4350K
NC0805KS304KB	300K	GE9.7B	-4.32	3950K

OPTIONS:

- Other resistances in the range $1\text{k}\Omega$ - 750k
- Tolerances at other temperatures
- Alternative contact materials
- For reel taping Replace 'B' with 'R'.
- Other tolerances, 5% (J) and 3% (H) available

DATA:

Standard resistance tolerance: $\dots \pm 10\%$ @ 25°C

Dissipation constant: $\dots 3.5 \text{ mW}/^{\circ}\text{C}$

Time Constant: $\dots 10 \text{ sec.}$

Operating Range $\dots -50^{\circ}\text{C}$ to 150°C

Crown Industrial Estate, Priorswood Road
 Taunton, Somerset TA2 8QY UK
 Tel +44 (0) 1823 335200
 Fax +44 (0) 1823 332637

808 US Highway 1
 Edison, New Jersey 08817-4695 USA
 Tel +1 (732) 287 2870
 Fax +1 (732) 287 8847

967 Windfall Road
 St. Marys, Pennsylvania 15857-3397 USA
 Tel +1 (814) 834 9140
 Fax +1 (814) 781 7969