



# GE Sensing

A COMMITMENT TO EXCELLENCE

GE Sensing, Crown Industrial Estate, Priorswood Road, Taunton, Somerset, TA2 8QY, UK  
Tel +44 (0) 1823 335200 Fax +44 (0) 1823 332637

<b>TEST SPECIFICATION</b>	PART No. <b>YQS8121T</b>	ISSUE: A
CUSTOMER: <b>Various</b>	DATE: <b>8<sup>th</sup> April, 2010</b>	QUANTITY:
<b>Replacement for YPCL0120T</b>	ORIGINATOR: <b>M.J.Roberts</b>	PAGE 1 OF 2


**DESCRIPTION:** PTC THERMISTOR INTENDED FOR USE AS A CURRENT LIMITING PROTECTION DEVICE

## MECHANICAL SPECIFICATION

**CONSTRUCTION:** COATED CERAMIC DISC WITH UNINSULATED LEADWIRES. THICK FILM SILVER ELECTRODES

**TERMINATIONS:** TIN COATED COPPER WIRE, SIDE KINK

**DIMENSIONS** in mm. NTS: SEE DRAWING BELOW.

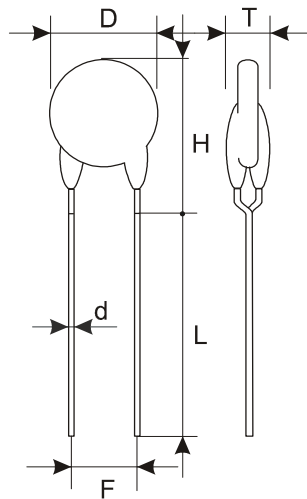

	<b>D</b>	<b>T</b>	<b>H</b>	<b>F</b>	<b>d</b>	<b>L</b>
<b>Max</b>	6.5	5.0	12.0	6.0	0.66	
<b>Min</b>				4.0	0.54	25

## ELECTRICAL SPECIFICATION:

RESISTANCE AT 25°C, R <sub>25</sub> :	120Ω +/- 25%	(1)
SWITCHING TEMPERATURE, T <sub>b</sub> :	110°C	(2)
TRIPPING CURRENT (I <sub>t</sub> ):	80mA	(3)
MAXIMUM NON-TRIPPING CURRENT (I <sub>nt</sub> ):	35mA	(3)
MAXIMUM VOLTAGE V <sub>max</sub> :	265V <sub>rms</sub>	
MAXIMUM RESIDUAL CURRENT with V <sub>max</sub> (I <sub>res</sub> ):	10mA	(3)
MAXIMUM OVERLOAD CURRENT (I <sub>mo</sub> ):	0.4A	(4)
AMBIENT TEMPERATURE RANGE,		

STORAGE: -40 to +125°C  
AT MAXIMUM VOLTAGE: 0 to +60°C


## **NOTES:**

- (1) Measuring Current: 1mA max. (2) Resistance = 2 × Resistance minimum  
(3) still air, 25 °C (4) 265V<sub>rms</sub>

CHANGES SINCE LAST ISSUE: Δ							
Issue :	A						
Date :	08/04/10						

The copyright in this Specification/Drawing/Document is the property of Thermometrics and the Specification/Drawing/Document is issued on the condition that it is not copied, reprinted, stored in an electronic retrieval system or reproduced, nor its contents disclosed either wholly or in part to any Third Party without either the consent in writing of or in accordance with the conditions of a contract with Thermometrics@GE THERMOMETRICS.

**PACKING:** TAPE AND REEL (Dimensions in mm)

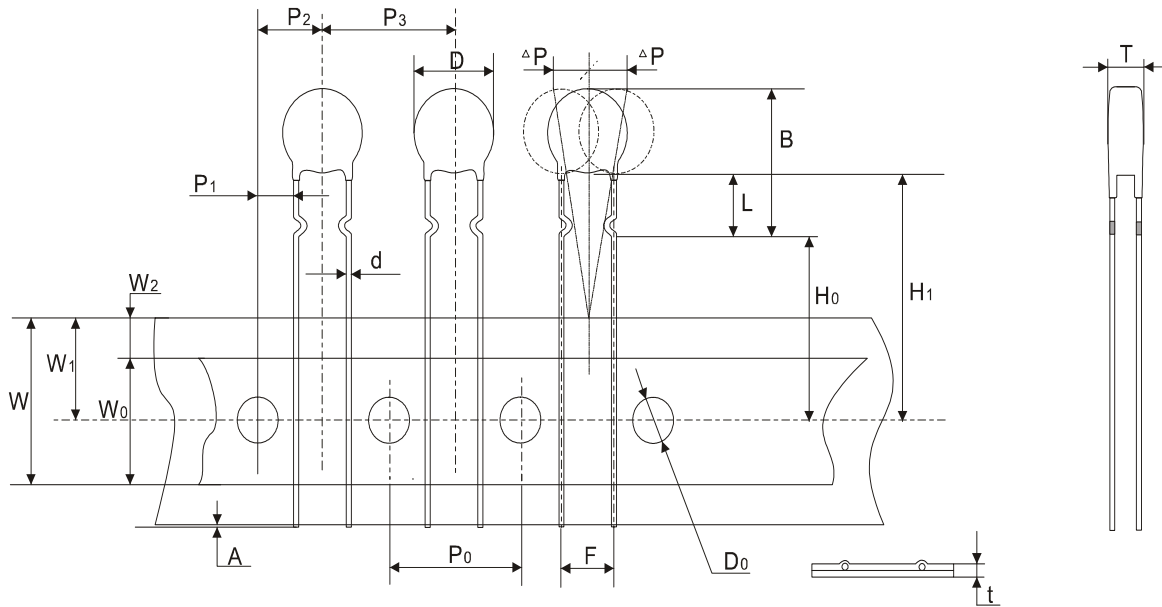

The copyright in this Specification/Drawing/Document is the property of Thermometrics and the Specification/Drawing/Document is issued on the condition that it is not copied, reprinted, stored in an electronic retrieval system or reproduced, nor its contents disclosed either wholly or in part to any Third Party without either the consent in writing of or in accordance with the conditions of a contract with Thermometrics@CE THERMOMETRICS.

ITE	P0	F	A	D0	t	W
Nor	12.7	5.0	lmax	4	0.6	18
TOL	±0.3	+0.5		±0.2	±0.2	±1
ITE	P2	P1	P3	ΔP	Δh	L
Nor	6.35	3.85	12.7	±1.5	2.0max	5
TOL	±1.3	±0.8				±1
ITE	W0	W1	W2	H0	H1	d
Nor	12	9	3	16	21	0.60
TOL	±1	±1	±1	±0.5	±0.5	±0.05

	D	T
Max	6.5	5.0
Min		

Quantity: 1000PCS/tape and reel