



▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF	ON
5-6	OPEN	5-4



▲ **CIRCUIT: SPDT**
ON-OFF-ON

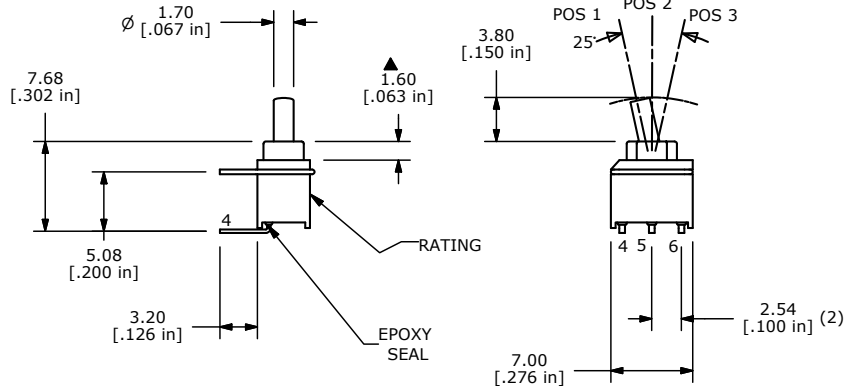

- NOTE:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
 3. TERMINAL NUMBERS FOR REF ONLY
 - ▲ 4. STATIONARY CONTACTS: COPPER ALLOY W/GOLD PLATING
 - ▲ 5. MOVING CONTACTS: COPPER ALLOY W/ GOLD PLATING
 5. RATING: 0.4 VA max. @ 20V AC OR DC max.
 6. CONTACT RESISTANCE: <100 MILLI-OHM
 7. MECHANICAL LIFE: 40,000 MAKE-AND-BREAK CYCLES.
 8. INSULATION RESISTANCE: 500 MEGA-OHM min.
 9. DIELECTRIC STRENGTH: 500 V RMS @SEA LEVEL.
 10. OPERATING TEMP.: -30°C to 85°C
 11. ▲ DENOTES CRITICAL PARAMETER.
 12. SEAL RATING: IP67
 13. 2002/95/EC (ROHS) COMPLIANT

B	19606	UPDATE PLATING NOTE	01/20/11	BMA
A	19486	New Release	12/02/10	BMA
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE 200USP3T1A1M6RE			
SCALE 2:1	DATE 12/2/2010	DR BMA	DWG T250007
			REV B