

NOTES: UNLESS OTHERWISE SPECIFIED

1. CONSTRUCTION:  
HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6.  
AVAILABLE IN TEN COLORS.

CONTACT BLADE: BERYLLIUM COPPER PER QQ-C-533. GOLD PLATED PER MIL-G-45204 B TYPE 1 0.0001" [0.00254] THICK MINIMUM.


SPRING: STAINLESS STEEL TYPE 302.

2. PERFORMANCE:  
MAXIMUM CURRENT: 4.4 AMPS WITH 76° TEMPERATURE RISE.

MAXIMUM VOLTAGE: 2.4 KV

MAXIMUM TEMPERATURE: 200°F (93°C)

3. FEATURES:  
HOOK FITS COMPONENTS UP TO  $\phi 0.045$ " [1.14].  
FIELD SERVICEABLE.

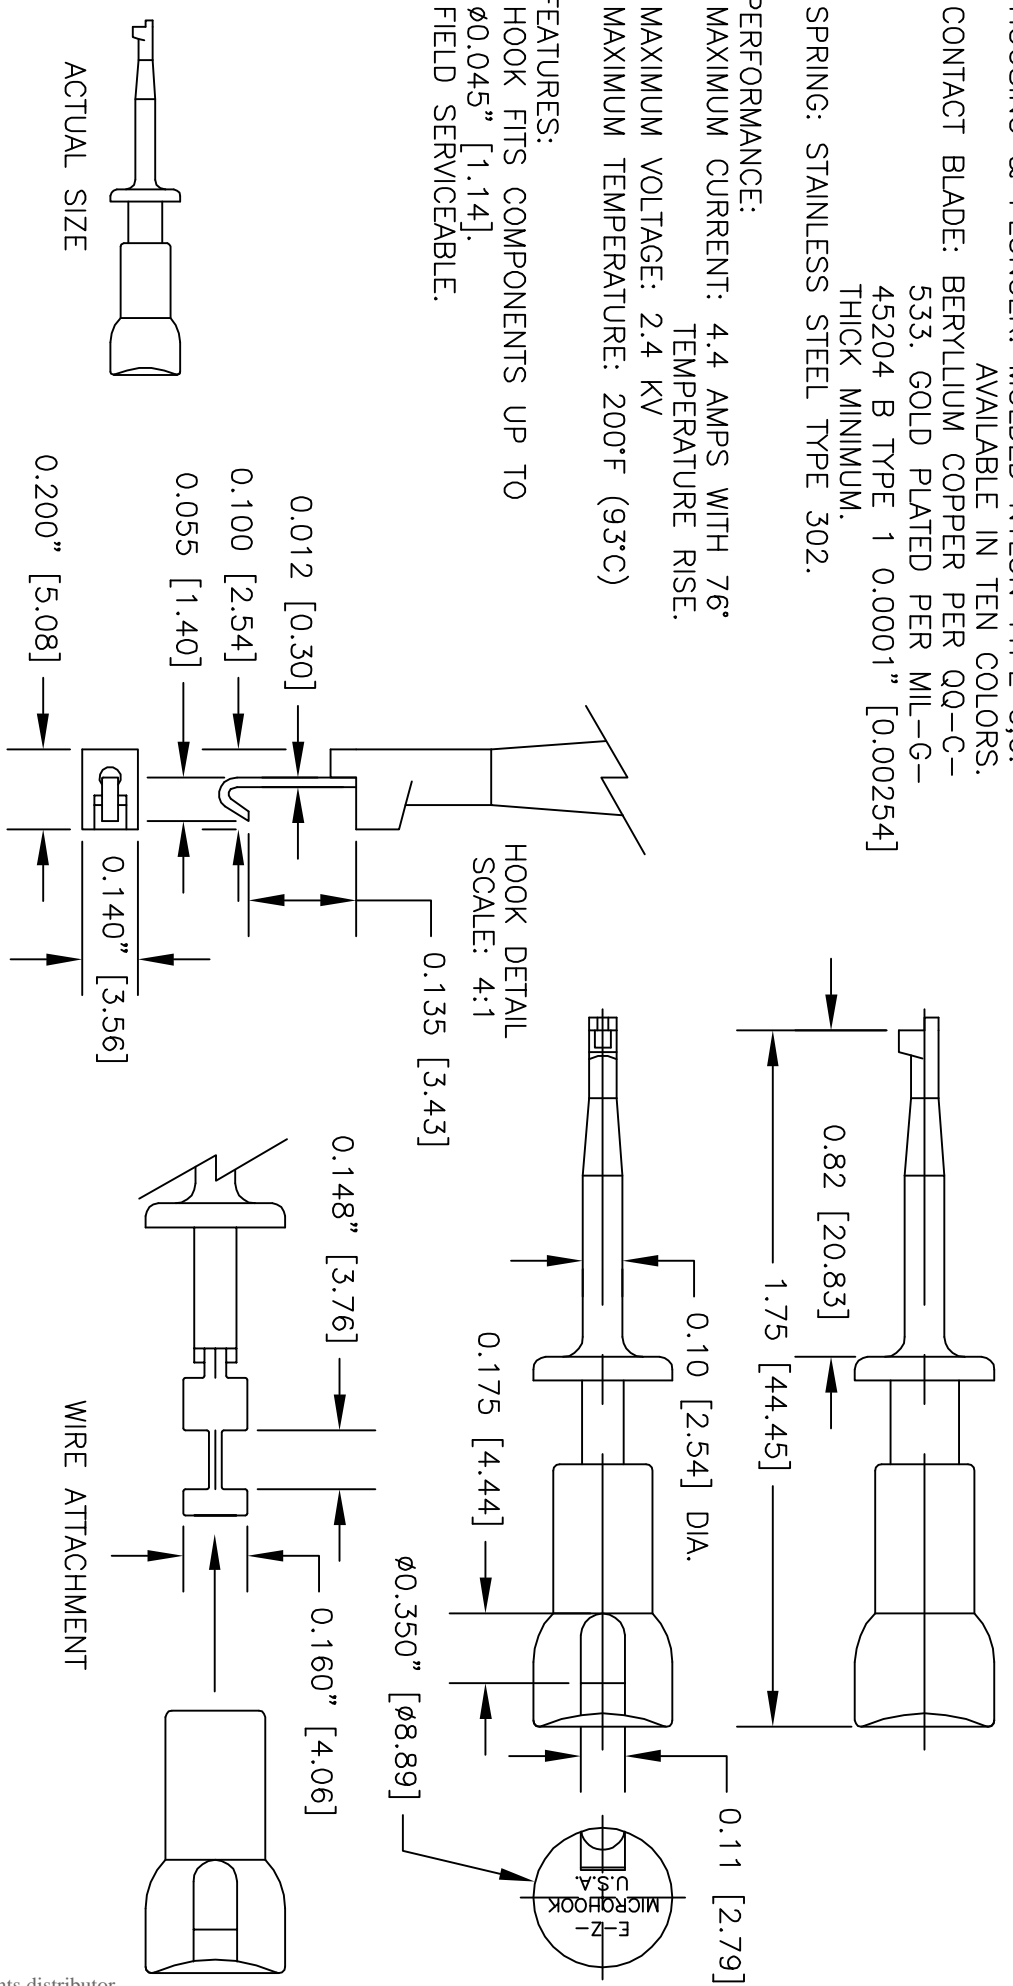

LTR	DESCRIPTION	REVISIONS	DATE	APPROVED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.	
± .XX ±	±	APPROVALS	DATE
± .XXX ±	±	DRAWN	R.L. 6/09
MATERIAL SEE NOTE.		APPROVED BY	
FINISH SEE NOTE.			
NEXT ASSY USED ON			
APPLICATION DO NOT SCALE DRAWING			
DESCRIPTION		E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
E-Z-MICRO HOOK TEST CONNECTOR			
SIZE	CODE IDENT NO.	DRAWING NO.	REV
A	08505	XMCCOLOR	
SCALE	2:1	SHEET 1 OF 1	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.