

NOTES: UNLESS OTHERWISE SPECIFIED

1. CONSTRUCTION:
HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6.
AVAILABLE IN TEN COLORS.

CONTACT BLADE: BERYLLIUM COPPER PER QQ-C-533. GOLD PLATED PER MIL-G-45204 B TYPE 1 0.0001" [0.00254] THICK MINIMUM.


SPRING: STAINLESS STEEL TYPE 302.

2. PERFORMANCE:


MAXIMUM CURRENT: 6.1 AMPS WITH 77° TEMPERATURE RISE.
MAXIMUM VOLTAGE: 3.0 KV
MAXIMUM TEMPERATURE: 200°F (93°C)

3. FEATURES:

HOOK FITS COMPONENTS UP TO $\phi 0.045$ " [1.14].
PIN PERMITS CONNECTION TO 0.025" [0.64] SQ. OR $\phi 0.030$ " [0.76] SOCKETS.

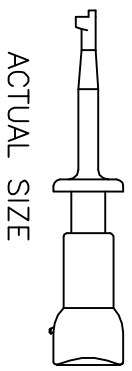

ACTUAL SIZE

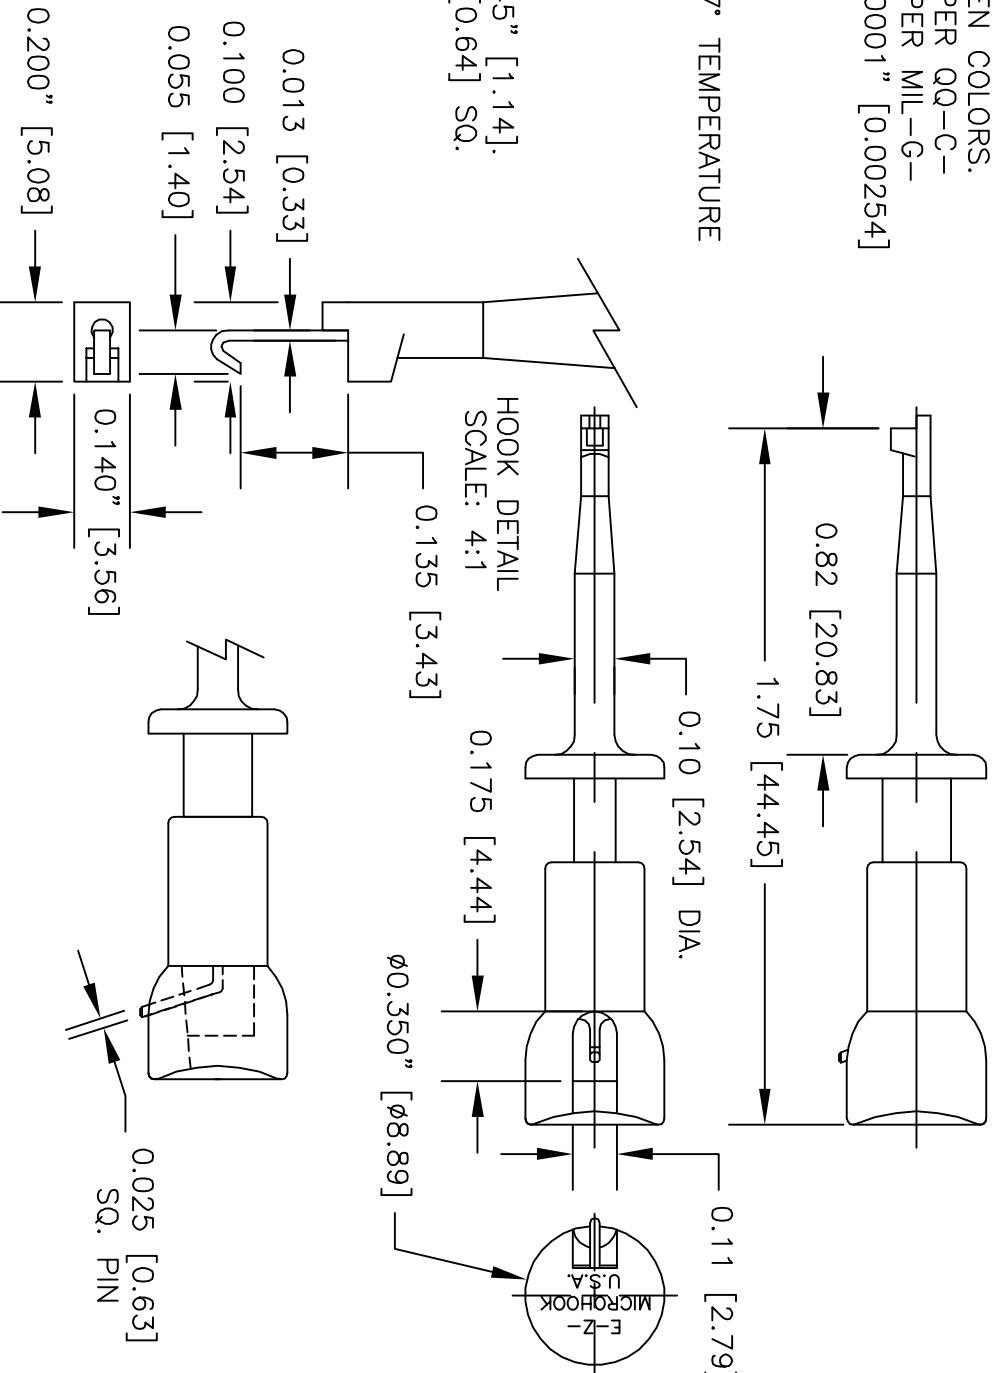

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES	
±	.XX ±
±	.XXX ±
MATERIAL SEE NOTE.	
FINISH SEE NOTE.	
USED ON	APPLICATION
	DO NOT SCALE DRAWING

CONTRACT NO.	
APPROVALS	DATE
R.L.	6/09
APPROVED BY	

E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
DESCRIPTION E-Z-MICRO HOOK WITH 0.025 [0.64] SQUARE PIN	
SIZE	CODE IDENT NO. DRAWING NO.
A	08505 XM25COLOR
SCALE	2:1
SHEET 1	OF 1

LTR	DESCRIPTION	REVISIONS	DATE	APPROVED

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.