

NOTES: UNLESS OTHERWISE SPECIFIED

1. CONSTRUCTION:


HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6. AVAILABLE IN TEN COLORS.
 CONTACT BLADE: BERYLLIUM COPPER, GOLD PLATED PER MIL-G-45204 B TYPE 1
 0.00001" [0.000254] THK MINIMUM.
 SPRING: STAINLESS STEEL TYPE 302.

2. PERFORMANCE


MAXIMUM CURRENT: 1.0 AMPS
 MAXIMUM VOLTAGE: 600 W.V.D.C.
 MAXIMUM TEMPERATURE: 200°F (93°C)

3. FEATURES:

HOOK FITS COMPONENTS UP TO $\phi 0.025$ " [0.64]. PIN PERMITS CONNECTION TO 0.025" [0.64] SQ. OR $\phi 0.030$ " [0.76] SOCKETS.



ACTUAL SIZE

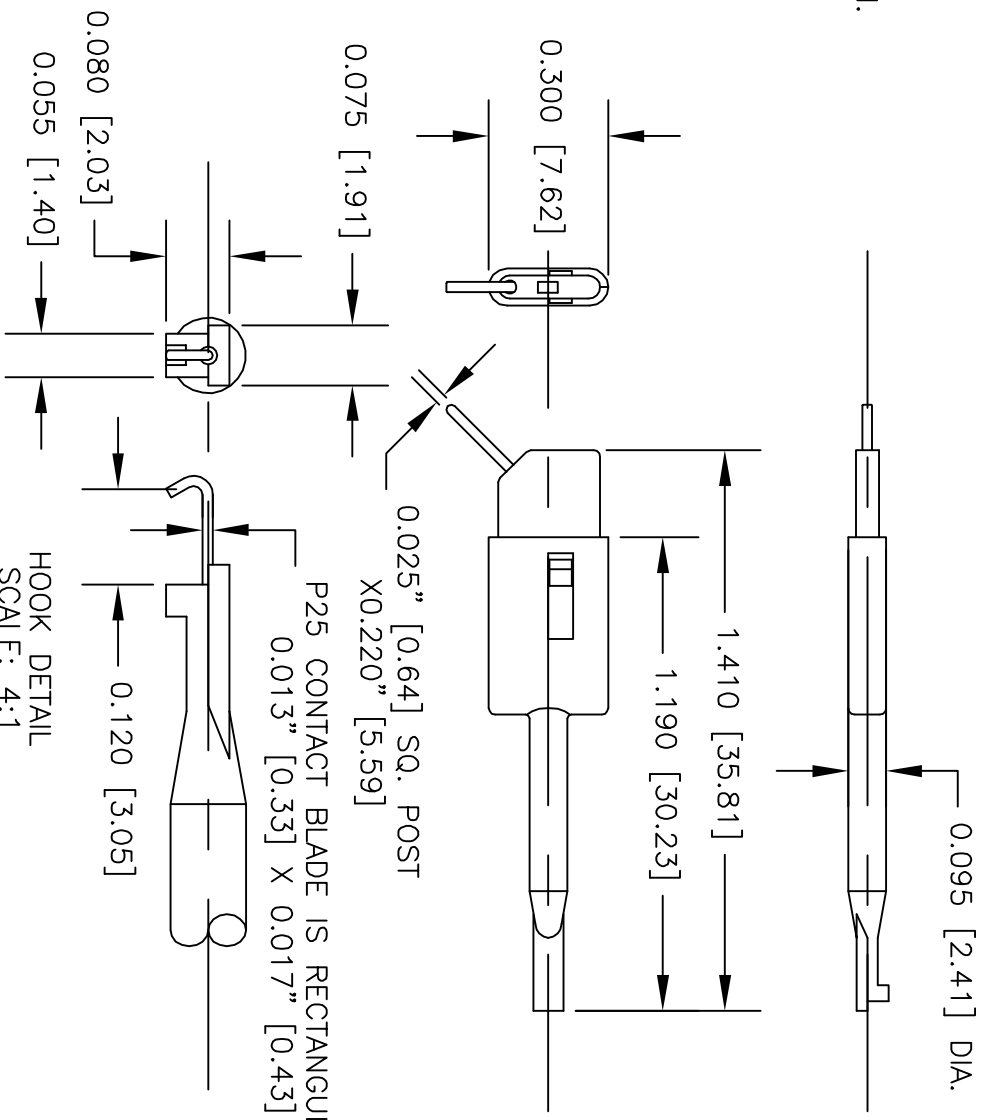

	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES
	± .XX ± ± .XXX ±
	MATERIAL SEE NOTE.
	FINISH SEE NOTE.
APPLICATION	USED ON DO NOT SCALE DRAWING

CONTRACT NO.	
APPROVALS	DATE
DRAWN R.L.	6/09
APPROVED BY	

E-ZHOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
DESCRIPTION: PICO HOOK WITH 0.25 [6.35] POST GOLD PLATED	
SIZE	CODE IDENT NO. DRAWING NO.
A	08505 P25COLOR
SCALE	2:1
SHEET 1	OF 1

LTR	REVISIONS	DESCRIPTION	DATE	APPROVED